

SEEnergy SVR-104 *Basic* Network Video Recorder

Reliable Network Video Recorder for SOHO



- Manage up to 4 Network Cameras
- Compatible with Major Brand Cameras
- High Quality Live/Playback Video
- Export Playback Videos to AVI
- Two-way Audio
- SEEnergy Smart Camera Search
- Mobile Devices Remote Monitoring
- Pure Web Based Administration

The SEEnergy SVR-104 Basic is designed for use within a surveillance system, and performs recordings and playbacks pictures from network cameras in the system. It is designed for small scale applications such as retail store. Up to 4 cameras can be connected via a network and it is possible to record their camera pictures. It is possible to perform the settings or operate the NVR using a web browser installed on a PC connected to a network and live videos can be viewed on major mobile devices through its web browser. Recorded video can be played back from remote site by a PC. SVR-104 Basic is compatible with most major brand cameras and its ability to automatically search and find the available cameras on the network can greatly reduce the user's effort when configuring the system.

AVAILABLE AT: JIA YING TRADING PTE LTD

1 ROCHOR CANAL ROAD, #02-67 SIM LIM SQUARE, SINGAPORE 188504

TEL: 63360404 FAX: 63380404 EMAIL: jiaying@singnet.com.sg WEB: www.jiaying.com

SVR-104 Basic-- Hardware Specifications

CPU and Memory

- ARM9 300 Mhz/128 DDR RAM

Ethernet

- Gigabit, half duplex/full duplex auto-negotiation

HDD

- SATA HDD Slot x 2 (SATA I or SATA II)
- Max. Capacity: 3TB (1.5TB per HDD)

Buttons

- Reset/Power

Connectors

- USB x 2

Power

- 12V DC/3A
- Power consumption: 36W

Dimensions

- 24.5cm x 14cm x 8.3cm

Weight

- G.W. 3kg

Temperature



- Operating Temperature: 5°C ~ 40°C
- Storage Temperature: -20°C ~ 70°C

Humidity

- Operating Humidity: 10%RH ~ 80%
- Storage Humidity: 5%RH ~ 90%RH

Safety

- CE/FCC

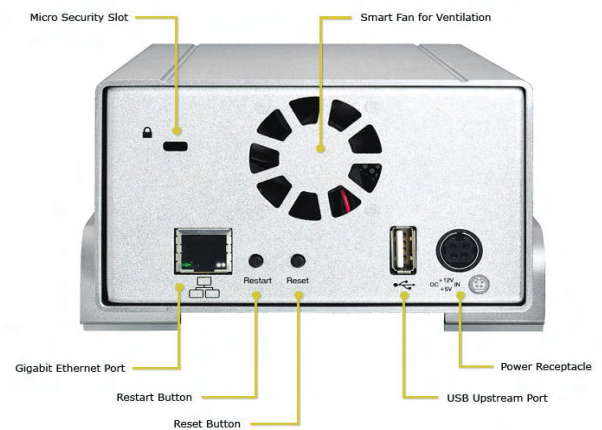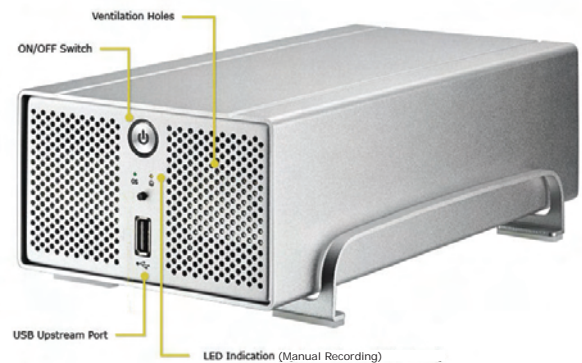

AVAILABLE AT: JIA YING TRADING PTE LTD

1 ROCHOR CANAL ROAD, #02-67 SIM LIM SQUARE, SINGAPORE 188504

TEL: 63360404 FAX: 63380404 EMAIL: jiaying@singnet.com.sg WEB: www.jiaying.com

SVR-104 Basic -- Software Specifications

Cameras

Add Camera	Manual/SEEnergy Smart Camera Search
Max. Channels	4
Supported Brands	Axis/Sony/Panasonic/AVTech/Canon/D-Link/ACTi/Zavio/AMTK/Vivotek/Arecont Vision/Etrovision/Level 1/Mobotix/Toshiba/Abus/Planet/Pixord/IQInvision/A-Linking/Brickcom/Hunt

Video

Compression	MJPEG/MPEG-4 Part 2/H.264
Resolution	HD/MegaPixel/FD1/CIF/QCIF
Max. Frame Rate	120 fps (1.3 MegaPixel, H.264)

Audio

Streaming	Two-way audio
------------------	---------------

Live View

Display Mode	Live View/Playback/Full Screen
Split Screen	1/4/
Full Screen	1/4/
PTZ Support	Virtual PTZ Panel/Digital PTZ/Auto Pan/Preset Point/Preset Sequence
Sequence Mode	Sequence All/Manually Selected cameras in 1/4 split view with configurable timer
Snapshot	Video snapshot in JPEG format
E-Map	Motion Detected Event Display on E-Map/Google Map
Mobile Device	Live image view through mobile device's web browser Support iPhone/Blackberry/WinMo 6.5/Symbian S60

Playback

Split Screen	1/4
Search Method	Time/Date, Event
Playback Controls	Play/Pause/Stop/Forward/Reverse/Speed Adjust/Frame by Frame
Export AVI	Export Playback Videos to Local Computer in AVI Format

Recording

Capacity	Depends on hard disk
Recording Mode	Manual/Continuous/Scheduling/Event
Scheduling Types	Manual Select/Profile-based/Weekly Mode
Max. Recording Throughput	18 Mbps

Network

Protocols	HTTP/SMTP/DHCP/ARP/NTP/DNS/UPnP/FTP
Streaming Protocols	Depend on the supported cameras

User Management

Management	User/Group
Number of Groups	7 (Administrator/Guest/User Define * 5)
Privileges	Live View/Playback/System Configurations/Camera Configurations/Recording Configuration/Event Configuration/Maintenance

Triggers & Events

Events	<i>System Events</i> -- System Start/Shutdown, System Settings modified, Camera Settings Modified, Start Recycle, Disk Full <i>Camera Events</i> -- Motion/Sensor Detection
Event Actions	Mail/FTP/Record
Event Recording	Pre/Post Event Settings

Storage

Storage	Support SATA x 2, Max. 1.5TB per drive
----------------	--

Log Types	Alert/Event/User Access
------------------	-------------------------

Systems

Mini. Hardware Requirements	CPU: Intel Core 2 Duo @ 2.4Ghz or higher RAM: 1GB or above Network: 100 Megabit Network Interface or above
Mini. Software Requirements	IE Browser version 7 or Above

General

Languages	English/Trad. Chinese/Simp. Chinese/Japanese/Spanish/Italian/German/Danish/Czech/Polish/French/Russian/Slovenky/Hungarian/Portuguese
Packaging	SVR-104 Basic (HD NOT included)/CD with Software tool/Datasheet/Quick Guide/User's Manual/Warranty Card/Power Adapter

AVAILABLE AT: JIA YING TRADING PTE LTD

1 ROCHOR CANAL ROAD, #02-67 SIM LIM SQUARE, SINGAPORE 188504

TEL: 63360404 FAX: 63380404 EMAIL: jiaying@singnet.com.sg WEB: www.jiaying.com

