

QH-AP7310A-Q1322A

AHD PTZ


QIHAN
Creation for Safe Life



Feature

- 1/3" Professional CMOS sensor
- 22x/37x optical zoom, 12x digital zoom
- 25/30fps@720P(1280 x720) resolution
- Day/Night(ICR), AE, AWB, Auto focus
- Control over coaxial cable, long distance real-time transmission
- 0.1~240°/s pan speed, 360° endless pan rotation
- Up to 255 presets, 8 tour, 6 pattern
- Built-in 4/2 alarm in/out optional
- Support intelligent 3D positioning with QH-SD protocol
- IP66, Multi Language OSD

Dimensions

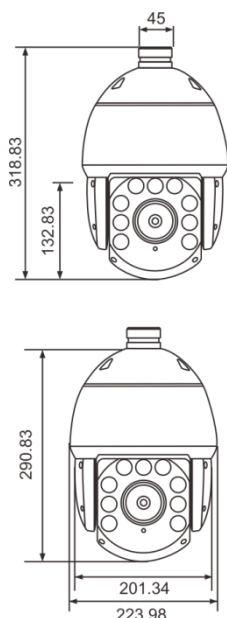

Unit: mm

Technical Specifications

Model NO.	QH-AP7310A-Q1322A
Lens	22X Optical Zoom, 16X Digital Zoom
Effective Pixels	1280*960
UTC	Yes
Operation	
OSD menu	English, Chinese, , Russian, Spanish Optional
Preset position	256 Preset Positions
Scan	Auto scan and left-right limited scan, speed adjustable
Patro	8 tracks, preset, speed and dwell time changeable
Pattern	6 Lines(Pan/Tilt/Zoom, every line can record up to 120 seconds)
Alarm	4 alarm inputs , 2 alarm outputs (optional)
Address range	0~255 (Setup by dip switcher, firmware)
Communication	RS485 (+/-)
Baud rate	2400/4800/9600/19200
Protocol	PELCO-D, PELCO-P , ULTRACK, VICON, DYNACOLOR
Zoom times	Display on/off
Firmware Update interface	RS485 (+/-)
Mechanical	
Pan range	0°~ 360° continuously
Pan speed	0.1~ 240°/s
Tilt range	0°~ 90°, Auto Flip 180°to Continue Monitor
Tilt speed	0.1~ 180°/s
Precision	±0.10°
Infrared	
IR Distance	150 Meters
IR Control	Auto/Manual
IR Driver	PWM
IR Detect Time	2~15s, Sync with the Camera
IR Light Level	0~30 Adjustable
IR Sensitivity	0~30 Adjustable
Standby Level	OFF/1~30 Adjustable
IR Mode	Auto/Far/Near/Far+Near/Close
Others	
Housing	Aluminum Alloy, Vandal Proof Housing,Wall Mount,Ceiling Mount
Lighting proof	6000V
Ingress protection	IP66
Work temp	-40℃ ~+60℃
Work humidity	0%~90%
Power	AC24V/4A
Weight	3.8kg
Size	φ223.98*290.83mm