


### Feature

- 4CH 1080N AHD DVR, 4/1 Audio in/out, HDMI/VGA/BNC Video Out, 1 SATA Port, DC12V

### Dimensions

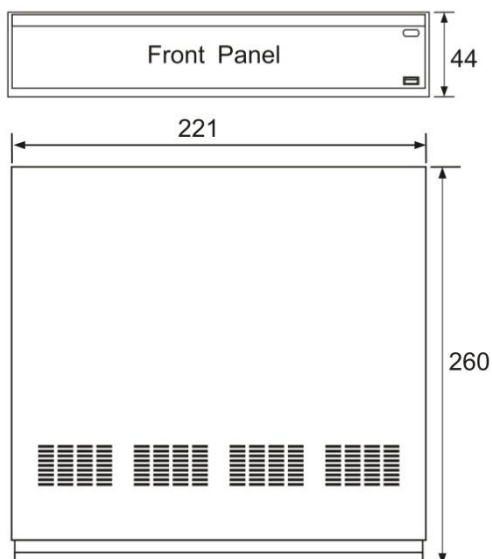

Unit: mm

### Technical Specifications

Model NO.	QH-D6008CHM
OPERATION SYSTEM	LINUX
<b>VIDEO / AUDIO</b>	
VIDEO SYSTEM	NTSC/PAL Switch Selectable
VIDEO INPUT	BNC*8, 1.0Vp-p, 75ohm
CVBS OUTPUT	1 CVBS Output
HDMI OUTPUT	1 HDMI Output
VGA OUTPUT	1 VGA Output
AUDIO INPUT / OUTPUT	4CH, RCA / 1CH, RCA
TALK BACK	YES
<b>CONTROL</b>	
MOUSE	2*USB2.0
IR CONTROLLER	YES
<b>STORAGE</b>	
BUILD IN INTERFACE	SATA *1 ( 1*HDD 4TB )
<b>DISPLAY</b>	
DIVISION	1, 4, 9
ZOOM	Preview&Playback Zoom Support
<b>RECORDING</b>	
COMPRESSION	H.264 ( High profile )
RECORDING MODE	Manual/Schedule/Motion Detection/Sensor (Optional )
ENCODING ABILITY	8*1080N@15fps
DECODING ABILITY	4*1080N@15fps
RESOLUTION	Analog : 8*1080N
	Hybird : 4*1080N (Analog) +4*720P (Network) Network : 8*720P;
QUALITY	Worst, Worse, Bad, Normal, Better, Best
<b>PLAYBACK</b>	
SYNC PLAYBACK	1, 4
SPEED	Normal, FF(1X, 2X, 4X, 8X), Slow (1/2X, 1/4X, 1/8X)
SEARCH METHOD	Time, Event, Channels and Calendar
<b>COMMUNICATION</b>	
REMOTE ACCESS	IE ( 10.0 and below), ISS ( Windows XP/WIN7/WIN8/WIN10 ), ISS MOBILE2 ( IOS, Android )
REMOTE OPERATION	Remote View, Remote Playback, Remote Setup
NETWORK SERVICE	TCP/IP, PPPOE, DDNS, FTP, NTP UPNP
MOBILE DEVICE	iPone, iPad, Android
WAN RJ45	10/100Mbit/s
3G EXTERNAL MODULE	Yes, with USB 2.0 Port
WIFI EXTERNAL MODULE	Yes, with USB 2.0 Port, 100Meters
GUI INTERFACE	Supported GUI 16 Bit True Color
PTZ PROTOCOL	PELCO-D, PELCO-P, etc 17 kinds of protocol
<b>BACKUP</b>	
EXTERNAL	2*USB2.0
NETWORK	YES
FILE FORMAT	AVI/dav
<b>GENERAL</b>	
ALARM IN/OUT	4 Alarm Input, 1 Alarm Output
RS-485	1
UNIT DIMENSION(mm)	260(L) x 44(H) x 221(W)
OPERATION TEMPERATURE	10℃ ~ 40℃
WORKING HUMIDITY	10% ~ 90%
POWER CONSUMPTION	DC 12V,2A, <6W (Exclude HDD)