

Test Report



(Declaration of Conformity)

for

Electromagnetic Compatibility

of

Product : **Network Camera**

Trade Name :  **VIVOTEK**
BUILT WITH RELIABILITY

Model Number : FD8133; FD8134

Prepared for

VIVOTEK INC.

6F, No. 192, Lien-Cheng Rd., Chung-Ho City, Taipei County, Taiwan R.O.C.

Tel. : +886 2 8245 5282

Fax. : +886 2 8245 5532

Prepared by

Interocean EMC Technology Corp.

No.5-2, Lin 1, Tin-Fu Tsun, Lin-Kou Hsiang,

Taipei County 244, Taiwan, R.O.C.

TEL.: +886 2 2600 6861

FAX.: +886 2 2600 6859

Remark:

The test report consists of **86** pages in total. It shall not be reproduced except in full, without the written approval of IETC. This document may be altered or revised by IETC only, and shall be noted in the revision section of the document.

The test results in the report only to the tested sample.

Table of Contents

1	General Information	6
1.1	Description of Equipment Under Test	6
1.2	Comparison for Multiple Listing	7
1.3	Details of Tested Supporting System	8
1.4	Test Facility	9
1.5	Summary of Test Results	10
1.6	Measurement Uncertainty	12
1.7	Measured Mode	13
1.8	Configuration of EUT Setup	13
1.9	Test Step of EUT	13
2	Power Line Conducted Emission Measurement	14
2.1	Instrument	14
2.2	Block Diagram of Test Configuration	14
2.3	Conducted Limits	14
2.4	Instrument configuration	15
2.5	Configuration of Measurement	15
2.6	Test Result	15
3	Telecommunication Ports Conducted Emission Measurement	20
3.1	Instrument	20
3.2	Block Diagram of Test Configuration	20
3.3	Conducted Limit (Telecommunication ports)	21
3.4	Instrument configuration	21
3.5	Configuration of Measurement	22
3.6	Test Result	22
4	Radiated Emission Measurement (Below 1GHz)	25
4.1	Instrument	25
4.2	Block Diagram of Test Configuration	25
4.3	Radiated Limits	25
4.4	Instrument configuration	26
4.5	Configuration of Measurement	26
4.6	Test Result	26
5	Harmonic Current Emissions Measurement (EN 61000-3-2)	31
5.1	Instrument	31
5.2	Block Diagram of Test Configuration	31
5.3	Test Limits	32
5.4	Configuration of Measurement	33
5.5	Test Result	33

6	Voltage Fluctuations and Flicker Measurement (EN 61000-3-3)	42
6.1	Instrument	42
6.2	Block Diagram of Test Configuration	42
6.3	Test Limits	42
6.4	Configuration of Measurement	42
6.5	Test Result	42
7	Performance Criterion of Immunity Test	47
7.1	EN 55024	47
7.2	EN 61000-6-1	48
8	Electrostatic Discharges Immunity Test (IEC 61000-4-2)	49
8.1	Instrument	49
8.2	Block Diagram of Test Configuration	49
8.3	Test Levels	49
8.4	Test Requirement	49
8.5	Configuration of Measurement	50
8.6	Test Result	51
9	Radio-frequency, Electromagnetic field Immunity Test (IEC 61000-4-3)	52
9.1	Instrument	52
9.2	Block Diagram of Test Configuration	52
9.3	Test Levels	52
9.4	Test Requirement	53
9.5	Configuration of Measurement	53
9.6	Test Result	54
10	Electrical Fast Transients Immunity Test (IEC 61000-4-4)	55
10.1	Instrument	55
10.2	Block Diagram of Test Configuration	55
10.3	Test Levels	56
10.4	Test Requirement	56
10.5	Configuration of Measurement	56
10.6	Test Result	57
11	Surges Immunity Test (IEC 61000-4-5)	58
11.1	Instrument	58
11.2	Block Diagram of Test Configuration	58
11.3	Test Levels	58
11.4	Test Requirement	58
11.5	Configuration of Measurement	59
11.6	Test Result	59

12	Radio-frequency, Conducted Disturbances Immunity Test (IEC 61000-4-6)	60
12.1	Instrument	60
12.2	Block Diagram of Test Configuration	60
12.3	Test Levels	60
12.4	Test Requirement	61
12.5	Configuration of Measurement	61
12.6	Test Result	62
13	Power Frequency Magnetic Field Immunity Test (IEC 61000-4-8)	63
13.1	Instrument	63
13.2	Block Diagram of Test Configuration	63
13.3	Test Levels	63
13.4	Test Requirement	63
13.5	Configuration of Measurement	64
13.6	Test Result	64
14	Voltage Dips, Short Interruptions Immunity Test (IEC 61000-4-11)	65
14.1	Instrument	65
14.2	Block Diagram of Test Configuration	65
14.3	Test Levels	65
14.4	Test Requirement	66
14.5	Configuration of Measurement	66
14.6	Test Result	67
15	Photographs of Test	68
15.1	Power Line & Telecommunication Port Conducted Emission Measurement	68
15.2	Radiated Emission Measurement	70
15.3	Harmonic Current & Voltage Fluctuations and Flicker Measurement	72
15.4	Electrostatic Discharges Immunity Test (IEC 61000-4-2)	72
15.5	Radio-frequency, Electromagnetic field Immunity Test (IEC 61000-4-3)	73
15.6	Electrical Fast Transients Immunity Test (IEC 61000-4-4)	74
15.7	Surge Immunity Test (IEC 61000-4-5)	74
15.8	Radio-frequency, Conducted Disturbances Immunity Test (IEC 61000-4-6)	75
15.9	Power Frequency Magnetic Field Immunity Test (IEC 61000-4-8)	75
15.10	Voltage Dips, Short Interruptions Immunity Test (IEC 61000-4-11)	76
15.11	Electrostatic Discharge Test Point	77
16	Photographs of EUT	78
16.1	Model No.: FD8134	78
16.2	Model No.: FD8133	86

Statement of Compliance

Applicant: VIVOTEK INC.
Manufacturer: VIVOTEK INC.
Product: Network Camera
Model No.: FD8133; FD8134
Tested Power Supply: 230Vac/50Hz;
From PoE
Date of Final Test: May 27, 2010

Harmonized Standards :

- EN 55022: 2006+A1: 2007
- EN 55024: 1998+A1: 2001+A2: 2003
- EN 61000-3-2: 2006
- EN 61000-3-3: 2008
- EN 61000-6-1: 2007
- EN 61000-6-3: 2007

Reference Basic Standards :

Emission:

- CISPR 16-1-2: 2003 (4.3)
- CISPR 16-2-1: 2003 (7.4.1)
- CISPR 16-2-3: 2006 (7.2)
- CISPR 22: 2005 (9.6)

Immunity:

- IEC 61000-4-2: 2008
- IEC 61000-4-3: 2006+A1: 2007
- IEC 61000-4-4: 2004
- IEC 61000-4-5: 2005
- IEC 61000-4-6: 2008
- IEC 61000-4-8: 1993+A1: 2000
- IEC 61000-4-11: 2004

Other Standards :

- AS/NZS CISPR 22: 2006

The measurement results in this test report were performed at Interocean EMC Technology Corp. the responsibility of measurement result is only subject to the tested sample.

This report shows the EUT is technically compliance with the above official standards.

This report shall not be partial reproduced without written approval by Interocean EMC Technology Corporation.

Report Issued: 2010/06/09

Project Engineer:

Elli Chang
Elli Chang

Approved:

Gimmy Tsai
Gimmy Tsai

1 General Information

1.1 Description of Equipment Under Test

Product	: Network Camera
Model Number	: FD8133; FD8134
Applicant	: VIVOTEK INC. 6F, No. 192, Lien-Cheng Rd., Chung-Ho City, Taipei County, Taiwan R.O.C.
Manufacturer	: VIVOTEK INC. 5F, No. 168, Lien-Cheng Rd., Chung-Ho City, Taipei County, Taiwan, R.O.C.
Date of Receipt of Sample	: May 19, 2010
Date of Test	: May 20~27, 2010
Power Supply:	: SWITCH-MODE POWER SUPPLY Manufacturer: ENG Model No.: 3A-183WP12 Input: 100-240V~, 50-60Hz, 0.6A Output: 12Vdc, 1.5A Power cable: Non-shielded, Un-detachable 1.8 m, without core
Product Information	: <u>Interface Port:</u> General I/O Terminal Block*1 Ethernet 10/100 RJ45 Plug*1 Power port*1
Additional Description	: 1.) The test model is “ FD8134 ” and included in this report. 2.) All the difference and detail specification of models as in following page. 3.) For more detail specification about EUT, please refer to the user’s manual.

1.2 Comparison for Multiple Listing

Features	Model No.	FD8133 (Wired)	FD8134 (PoE)
Image Sensor: 1/4" CMOS Sensor in 1280 X 800 resolution		V	V
Removable IR-cut Filter for Day and Night Function			V
Built-in IR Illuminators, Effective up to 10Meters			V
Minimum Illumination: 0.3 Lux @ F1.8		V	
Minimum Illumination: 0 Lux @ F1.8 (IR LED on)			V
Real-time H.264, MPEG-4 and MJPEG Compression (Triple Codec)		V	V
Simultaneous Multiple Streams		V	V
Activity Adaptive Streaming for Dynamic Frame Rate Control		V	V
Tamper Detection for Unauthorized Changes		V	V
Built-in 802.3af Compliant PoE			V
Built-in MicroSD/SDHC Card Slot for On-board storage		V	V
3-axis Mechanical Design for Ceiling and Wall Mount Installation		V	V
Supports ONVIF Standard to Simplify Integration and Enhance Interoperability		V	V
Shutter Time: 1/5 sec. to 1/25000 sec.		V	V

1.3 Details of Tested Supporting System

1.3.1 PoE

Model Number : WAPPOE12
Manufacture : LINKSYS
RJ45 Cable : Non-shielded, Detachable 3.0 m, without core
PoE Adapter : Manufacturer: LINKSYS
Model No.: SA06L48-V
Input: 100-240Vac, 50-60Hz, 0.6A
Power Cord: Non-shielded, Detachable 1.8 m, without core
Output: 48Vdc, 0.4A
Power Cable: Non-shielded, Un-detachable 1.8 m, with core

1.3.2 Link PC

Model Number : IBM ThinkCentre 8434-IVV
Serial Number : 99MNC43
CPU Speed : Pentium 4 Celeron D 2.2GHz
EMC Compliance : CE, FCC, C-Tick, UL, BSMI: R33026
Manufacturer : IBM
RAM : 256M*1
Hard Disk Driver : 40GB
RJ45 Cable : Non-shielded, Detachable, 3 m, without core

1.4 Test Facility

- Site Description** : ☑Conduction 1 ☑Conduction 2 ☑OATS 2 ☑EMS Site
- Name of Firm** : Interocean EMC Technology Corp.
- Company web** : <http://www.ietc.com.tw>
- Site 1, 2 Location** : No.5-2, Lin 1, Tin-Fu Tsun, Lin-Kou Hsiang, Taipei County, Taiwan, R.O.C.
- Site 3, 4 Location** : No. 12, Ruei-Shu Valley, Ruei-Ping Tsun, Lin-Kou Hsiang, Taipei County, Taiwan, R.O.C.
- Site Filing** :
 - Federal Communication Commissions – USA
 Registration No.: 96399 (OATS 1 & 2)
 Registration No.: 518958 (OATS 3 & 4)
 Designation No.: TW1020
 - Voluntary Control Council for Interference by Information Technology Equipment (VCCI) – Japan
 Member No.: 1349
 Registration No. (Conducted Room): C-1094
 Registration No. (Conducted Room): T-1562
 Registration No. (OATS 1): R-1040
 Registration No. (OATS 2): R-1041
 - Industry Canada (IC)
 OUR FILE: 46405-4437 Submission: 130946
 Registration No. (OATS 1): 4437A-1
 Registration No. (OATS 2): 4437A-2
 Registration No. (OATS 3): 4437A-3
 Registration No. (OATS 4): 4437A-4
- Site Accreditation** :
 - Bureau of Standards and Metrology and Inspection (BSMI) – Taiwan, R.O.C.
 Accreditation No.:
 SL2-IN-E-0026 for CNS13438 / CISPR22
 SL2-R1-E-0026 for CNS13439 / CISPR13
 SL2-R2-E-0026 for CNS13439 / CISPR13
 SL2-A1-E-0026 for CNS13783-1 / CISPR14-1
 SL2-L1-E-0026 for CNS 14115 / CISPR 15
 - Taiwan Accreditation Foundation (TAF)
 Accreditation No.: 1113
 - TÜV NORD
 Certificate No: TNTW0801R-02



1.5 Summary of Test Results

1.5.1 Test program according EN 55022

Emission test equipment intended	
<input type="checkbox"/>	Class A
<input checked="" type="checkbox"/>	Class B

Report Clause	Phenomenon	Application	Reference Clause(s)	Reference standard	Result
2	Power Line Conducted Emission	Main power port	5.1	--	PASS
3	Telecommunication Ports Conducted Emission	Telecommunication	5.2	--	PASS
4	Radiated Emission (Below 1GHz)	Enclosure port	6.1	--	PASS
	Radiated Emission (Above 1GHz)	Enclosure port	6.2	--	Not applicable

1.5.2 Test program according EN 61000-3-2

Report Clause	Phenomenon	Application	Reference Clause	Reference standard	Result
5	Harmonic current emissions	AC power port	5	--	PASS

1.5.3 Test program according EN 61000-3-3

Report Clause	Phenomenon	Application	Reference Clause	Reference standard	Result
6	Voltage changes, voltage fluctuations and flicker	AC power port	5	--	PASS

1.5.4 Test program according EN 55024

Report Clause	Phenomenon	Application	Reference Clause(s)	Reference standard	Result
8	Electrostatic discharges (ESD)	Enclosure port	4.2.1	IEC 61000-4-2	PASS
9	Radio-frequency electromagnetic field	Enclosure port	4.2.3.1	IEC 61000-4-3	PASS
10	Fast transients	AC power port Signal port	4.2.2	IEC 61000-4-4	PASS
11	Surge	AC power port	4.2.5	IEC 61000-4-5	PASS
12	Radio-frequency continuous conducted	AC power port Signal port	4.2.3.2	IEC 61000-4-6	PASS
13	Power-frequency magnetic field	Enclosure port	4.2.4	IEC 61000-4-8	PASS
14	Voltage dips and interruptions	AC power port	4.2.6	IEC 61000-4-11	PASS

1.5.5 Test program according EN 61000-6-3

Report Clause	Phenomenon	Application	Reference Clause(s)	Reference standard	Result
2	AC Power Ports Conducted Emission	AC power port	7	CISPR 16-2-1, 7.4.1	PASS
	DC Power Ports Conducted Emission	DC power Port	7	CISPR 16-1-2, 4.3	Not applicable
3	Telecommunication Ports Conducted Emission	Telecommunication	7	CISRP 22 9.6	PASS
4	Radiated Emission (30MHz to 1GHz)	Enclosure port	7	CISRP 16-2-3 7.2	PASS
5	Harmonic current emissions	AC power port	7	EN 61000-3-2	PASS
6	Voltage changes, voltage fluctuations and flicker	AC power port	7	EN 61000-3-3	PASS

1.5.6 Test program according EN 61000-6-1

Report Clause	Phenomenon	Application	Reference Clause(s)	Reference standard	Result
8	Electrostatic discharge	Enclosure port	8	IEC 61000-4-2	PASS
9	Radio-frequency electromagnetic field	Enclosure port	8	IEC 61000-4-3	PASS
10	Fast transients	AC power port Signal port	8	IEC 61000-4-4	PASS
11	Surges	AC power port	8	IEC 61000-4-5	PASS
12	Radio-frequency common mode	AC power port Signal port	8	IEC 61000-4-6	PASS
13	Power-frequency magnetic field	Enclosure port	8	IEC 61000-4-8	PASS
14	Voltage dips and voltage interruptions	AC power port	8	IEC 61000-4-11	PASS

1.6 Measurement Uncertainty

No.	Item	Value
1	Power Line Conducted Emission (Conduction 1)	2.4 dB
2	Power Line Conducted Emission (Conduction 2)	2.4 dB
3	Disturbance Power Emission (Conduction 2)	3.1 dB
4	Click disturbances Emission (Conduction 2)	2.4 dB
5	Radiated Electromagnetic disturbance (Loop Antenna)	4.8 dB
6	Radiated Emission Test (OATS 1)	4.2 dB
7	Radiated Emission Test (OATS 2)	4.2 dB
8	Radiated Emission Test (OATS 3)	4.2 dB
9	Radiated Emission Test (OATS 4)	4.2 dB
10	Radiated Emission Test (1GHz~18GHz)	3.2 dB
11	Radiated Emission Test (18GHz~40GHz)	3.4 dB
12	Conducted Immunity Test (CDN-M2)	1.3 dB
13	Conducted Immunity Test (CDN-M3)	1.3 dB
14	Conducted Immunity Test (EM Clamp)	3.2 dB

1.7 Measured Mode

1.7.1 The test modes for final test are as following:


- Mode 1: Working Mode (AC to DC Adapter)
- Mode 2: Working Mode (PoE Adapter)

1.7.2 For Telecommunication Ports Conducted Emission Measurement, the test modes for final test are as following:


- Mode 1: RJ45 (LAN 100Mbps) (AC to DC Adapter)
- Mode 2: RJ45 (LAN 100Mbps) (PoE Adapter)

1.8 Configuration of EUT Setup

For Mode 1

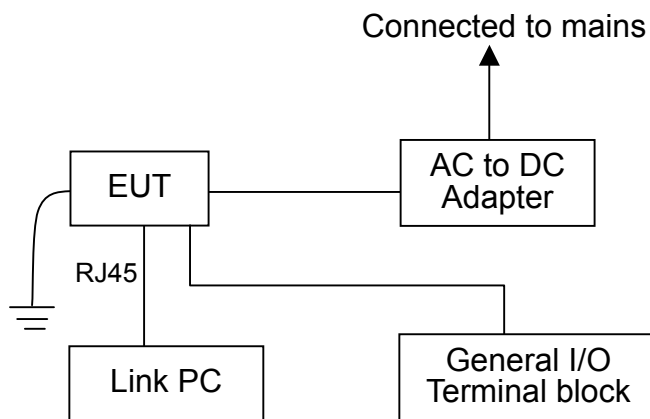

For Mode 2

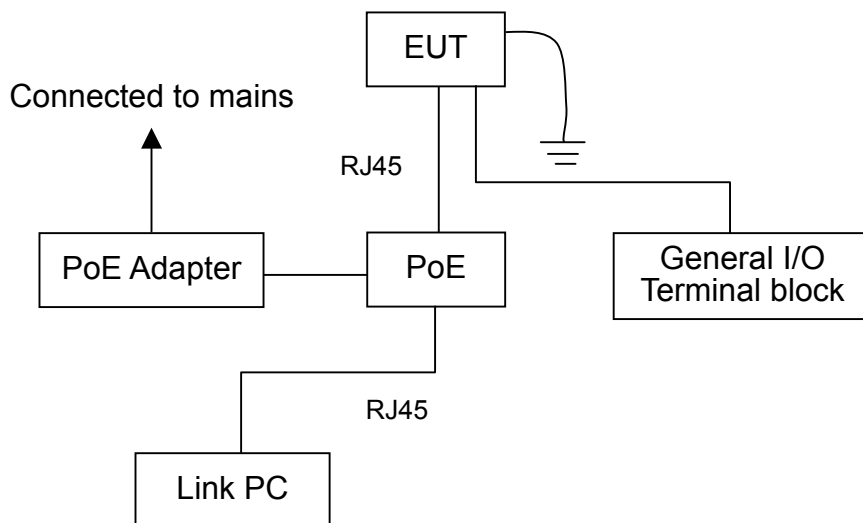

1.9 Test Step of EUT

- 1.9.1 Setup the EUT and peripheral as above.
- 1.9.2 Turn on the power of all equipment.
- 1.9.3 Executed the test.


2 Power Line Conducted Emission Measurement

2.1 Instrument

Instrument	Manufacturer	Model	Serial No.	Next Cal. Date
EMI Test Receiver	Rohde & Schwarz	ESCS30	100134	2010/08/12
RF Cable	HARBOUR	M71/128-RG400	MILC17-1	2010/07/23
L.I.S.N.	Schaffner	MN2050D	1597	2011/06/10
L.I.S.N.	Rohde & Schwarz	ESH3-Z5	829996/016	2011/01/09

Note: The above equipments are within the valid calibration period.

2.2 Block Diagram of Test Configuration

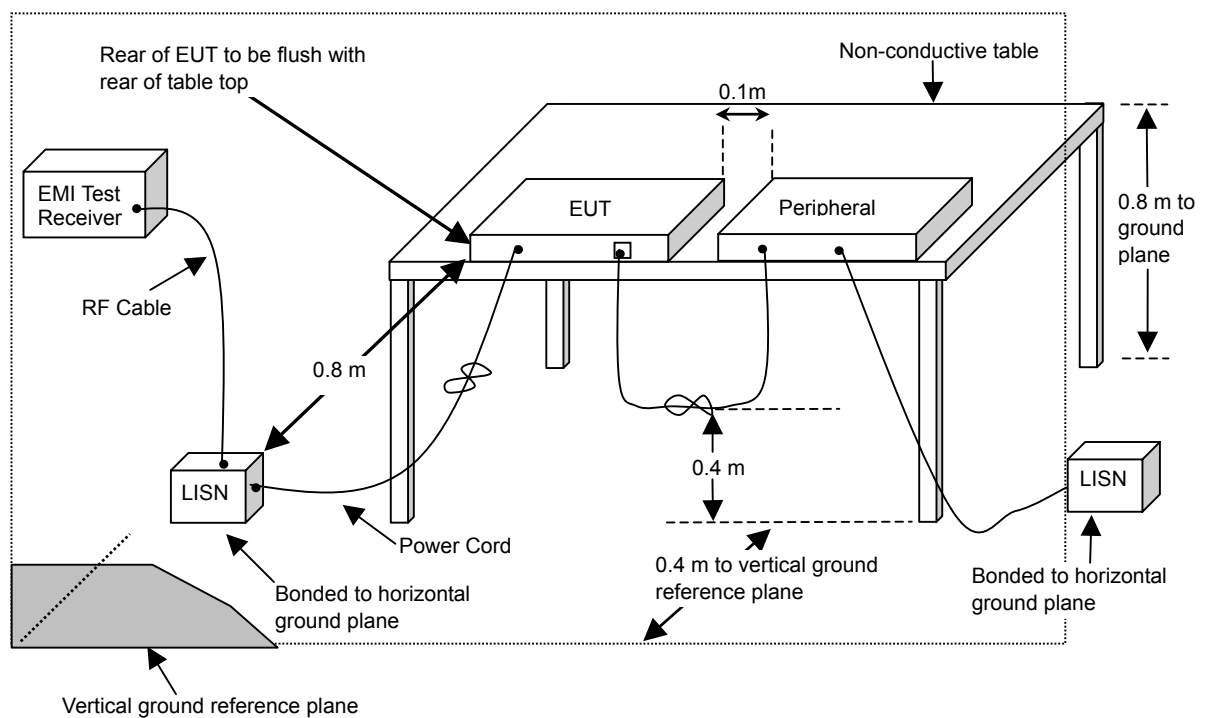

2.3 Conducted Limits

EN 55022 / AS/NZS CISPR 22

Frequency (MHz)	□ Class A (dB μ V)		☒ Class B (dB μ V)	
	Q.P. (Quasi-Peak)	A.V. (Average)	Q.P. (Quasi-Peak)	A.V. (Average)
0.15 ~ 0.50	79	66	66 to 56	56 to 46
0.50 ~ 5.0	73	60	56	46
5.0 ~ 30	73	60	60	50

EN 61000-6-3

Frequency (MHz)	Q.P. (Quasi-Peak)	A.V. (Average)
0.15 ~ 0.50	66 to 56	56 to 46
0.50 ~ 5.0	56	46
5.0 ~ 30	60	50

2.4 Instrument configuration

- 2.4.1 Set the EMI test receiver frequency range from 150 kHz to 30 MHz.
- 2.4.2 Set the EMI test receiver bandwidth at 9kHz.
- 2.4.3 Set the EMI test receiver detector as Quasi-Peak (Q.P.) and Average (AV).

2.5 Configuration of Measurement

- 2.5.1 The EUT was placed on a non-conductive table whose total height equaled 80cm and vertical conducting plane located 40cm to the rear of the EUT.
- 2.5.2 The EUT was connected to the main power through Line Impedance Stabilization Networks (LISN). This setup provided a 50ohm / 50 μ H coupling impedance for the measuring equipment. The auxiliary equipment was also connected to the main power through a LISN that provided a 50ohm/50 μ H coupling impedance with 50ohm termination. (Refer to the block diagram of the test setup and photographs.)
- 2.5.3 The conducted disturbance was measured between the phase lead and the reference ground, and between the neutral lead and reference ground. The initial testing identified the frequency that has the highest disturbance relative to the limit while operating the EUT in typical modes of operation and cable positions in a test setup representative of typical system configuration.
- 2.5.4 The identification of the frequency of highest disturbance with respect to the limit was found by investigating disturbances at a number of significant frequencies. The probable frequency of maximum disturbance had been found and that the associated cable and EUT configuration and mode of operation had been identified.

2.6 Test Result

PASS.


The final test data is shown as following pages.

Power Line Conducted Test Data

EUT: Network Camera	POLARITY: Line
CLIENT: VIVOTEK INC.	DISTANCE:
MODEL: FD8134	Serial No.:
RATING: 230V/50Hz	FILE/DATA#: VIVOTEK.emi/19
Temperature: 25.9 °C	OPERATOR: Elli
Humidity: 51 %	TEST SITE: Conduction 2

Frequency (MHz)	Factor (dB)	Meter Reading (dBµV)		Emission Level (dBµV)		Limits (dBµV)		Margin (dB)	
		Quasi-Peak	Average	Quasi-Peak	Average	Quasi-Peak	Average	Quasi-Peak	Average
0.189	0.20	44.78	36.95	44.98	37.15	64.08	54.08	-19.10	-16.93
0.263	0.18	35.33	21.25	35.51	21.43	61.34	51.34	-25.83	-29.91
0.279	0.17	42.40	30.75	42.57	30.92	60.85	50.85	-18.28	-19.93
0.451	0.14	41.22	28.59	41.36	28.73	56.86	46.86	-15.50	-18.13
0.834	0.11	29.00	22.10	29.11	22.21	56.00	46.00	-26.89	-23.79
28.689	1.09	35.87	31.55	36.96	32.64	60.00	50.00	-23.04	-17.36

Remark:
 1. All readings are Quasi-Peak and Average values.
 2. Factor = Insertion Loss + Cable Loss.

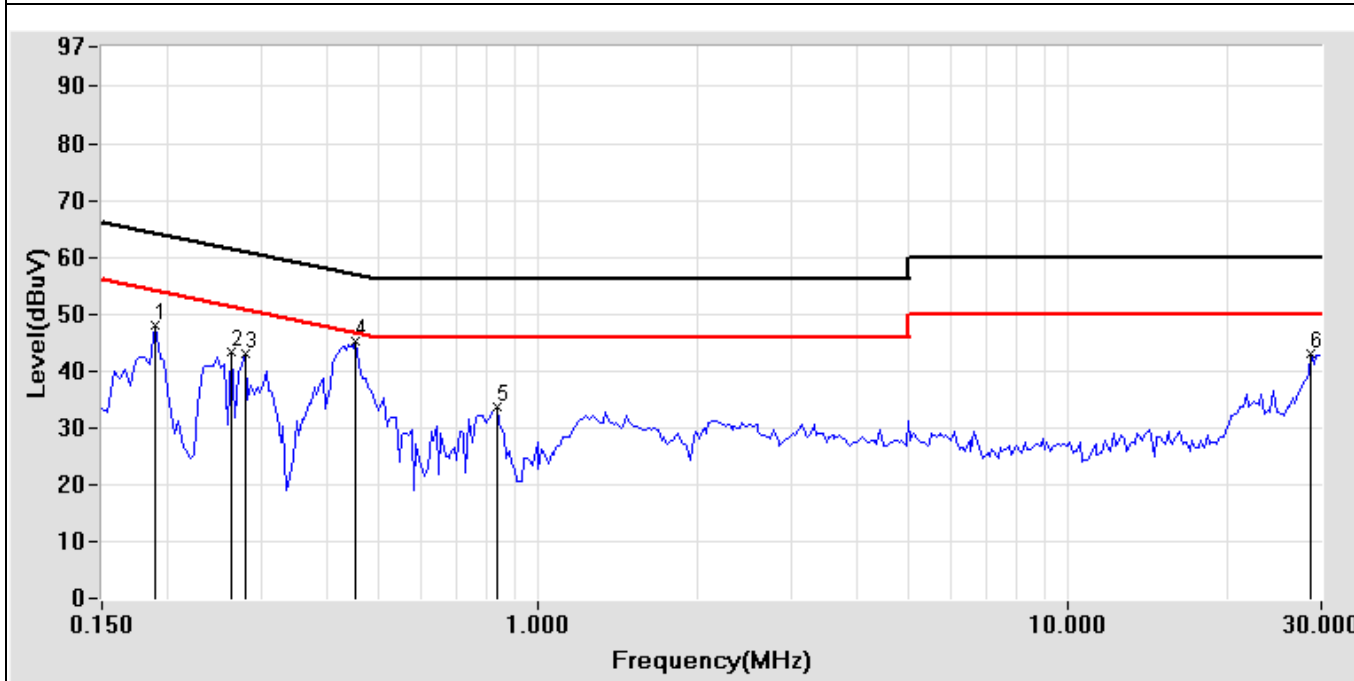


Test Mode: Mode 1: Working Mode (AC to DC Adapter)

Power Line Conducted Test Data

EUT: Network Camera CLIENT: VIVOTEK INC. MODEL: FD8134 RATING: 230V/50Hz Temperature: 25.9 °C Humidity: 51 %	POLARITY: Neutral DISTANCE: Serial No.: FILE/DATA#: VIVOTEK.emi/20 OPERATOR: Elli TEST SITE: Conduction 2
---	--

Frequency (MHz)	Factor (dB)	Meter Reading (dBµV)		Emission Level (dBµV)		Limits (dBµV)		Margin (dB)	
		Quasi-Peak	Average	Quasi-Peak	Average	Quasi-Peak	Average	Quasi-Peak	Average
0.185	0.20	42.25	32.71	42.45	32.91	64.26	54.26	-21.81	-21.35
0.275	0.18	34.20	22.58	34.38	22.76	60.97	50.97	-26.59	-28.21
0.435	0.15	36.39	26.34	36.54	26.49	57.16	47.16	-20.62	-20.67
0.638	0.12	33.41	25.54	33.53	25.66	56.00	46.00	-22.47	-20.34
4.423	0.17	26.94	21.87	27.11	22.04	56.00	46.00	-28.89	-23.96
29.912	0.95	37.98	34.11	38.93	35.06	60.00	50.00	-21.07	-14.94

Remark:
 1. All readings are Quasi-Peak and Average values.
 2. Factor = Insertion Loss + Cable Loss.

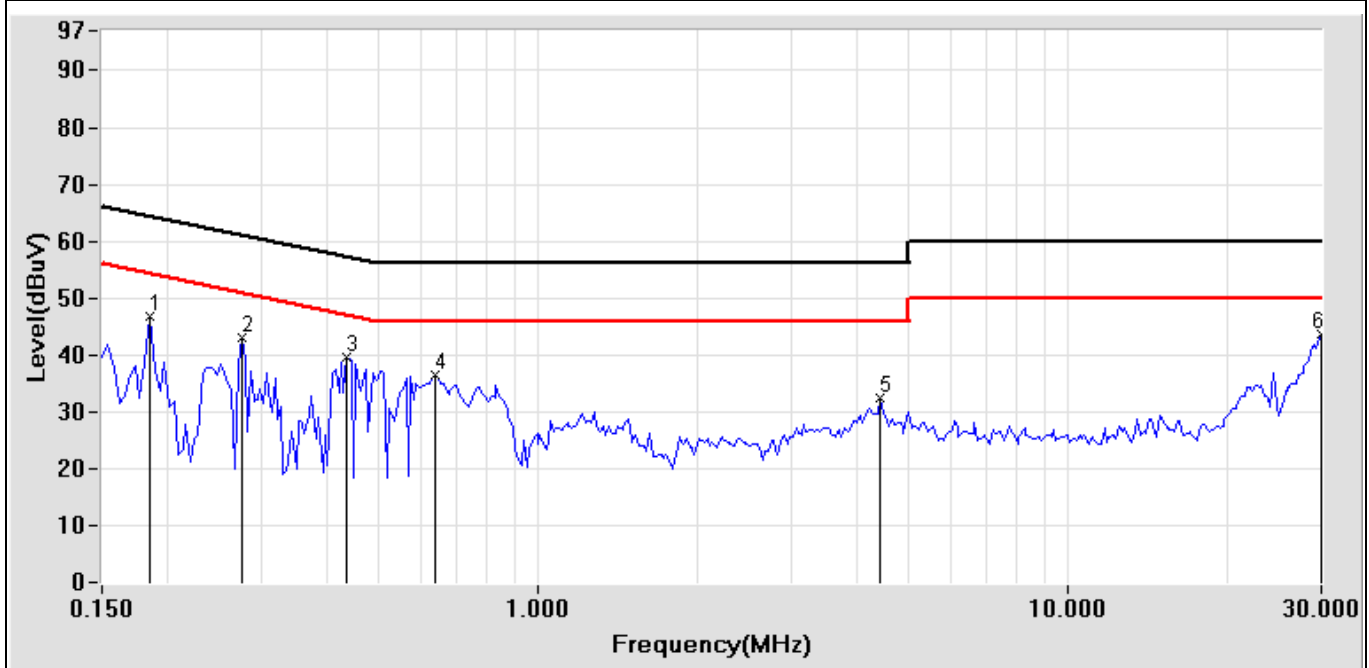


Test Mode: Mode 1: Working Mode (AC to DC Adapter)

Power Line Conducted Test Data

EUT: Network Camera CLIENT: VIVOTEK INC. MODEL: FD8134 RATING: From PoE Temperature: 25.2 °C Humidity: 48 %	POLARITY: Line DISTANCE: Serial No.: FILE/DATA#: VIVOTEK.emi/32 OPERATOR: Elli TEST SITE: Conduction 2
--	---

Frequency (MHz)	Factor (dB)	Meter Reading (dBµV)		Emission Level (dBµV)		Limits (dBµV)		Margin (dB)	
		Quasi-Peak	Average	Quasi-Peak	Average	Quasi-Peak	Average	Quasi-Peak	Average
0.244	0.18	42.97	40.80	43.15	40.98	61.96	51.96	-18.81	-10.98
0.486	0.14	46.17	41.72	46.31	41.86	56.24	46.24	-9.93	-4.38
0.728	0.12	43.52	38.81	43.64	38.93	56.00	46.00	-12.36	-7.07
1.212	0.09	44.87	41.71	44.96	41.80	56.00	46.00	-11.04	-4.20
1.337	0.10	42.99	39.01	43.09	39.11	56.00	46.00	-12.91	-6.89
2.080	0.11	41.10	39.75	41.21	39.86	56.00	46.00	-14.79	-6.14

Remark:
 1. All readings are Quasi-Peak and Average values.
 2. Factor = Insertion Loss + Cable Loss.

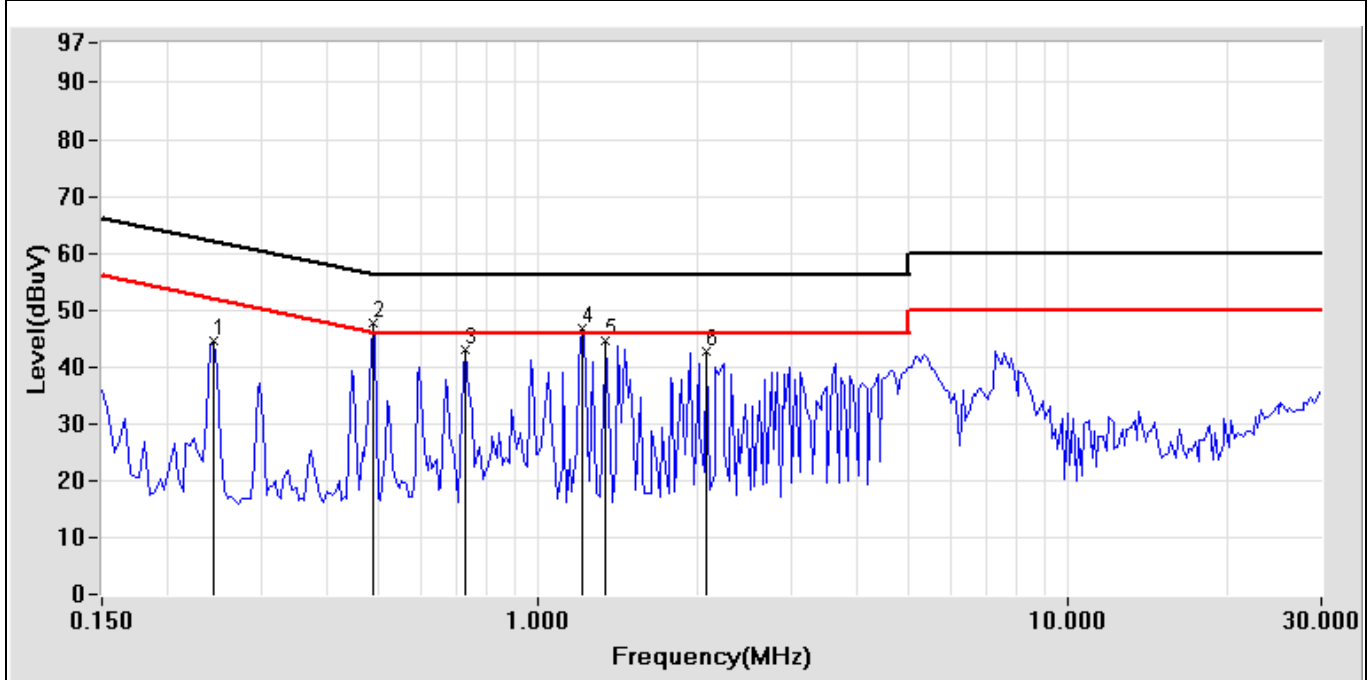


Test Mode: Mode 2: Working Mode (PoE Adapter)

Power Line Conducted Test Data

EUT: Network Camera	POLARITY: Neutral
CLIENT: VIVOTEK INC.	DISTANCE:
MODEL: FD8134	Serial No.:
RATING: From PoE	FILE/DATA#: VIVOTEK.emi/33
Temperature: 25.2 °C	OPERATOR: Elli
Humidity: 48 %	TEST SITE: Conduction 2

Frequency (MHz)	Factor (dB)	Meter Reading (dBµV)		Emission Level (dBµV)		Limits (dBµV)		Margin (dB)	
		Quasi-Peak	Average	Quasi-Peak	Average	Quasi-Peak	Average	Quasi-Peak	Average
0.244	0.18	43.01	41.10	43.19	41.28	61.96	51.96	-18.77	-10.68
0.486	0.14	46.09	41.87	46.23	42.01	56.24	46.24	-10.01	-4.23
0.728	0.12	41.30	40.34	41.42	40.46	56.00	46.00	-14.58	-5.54
1.212	0.09	44.89	41.86	44.98	41.95	56.00	46.00	-11.02	-4.05
1.259	0.10	40.17	38.26	40.27	38.36	56.00	46.00	-15.73	-7.64
1.459	0.10	43.10	40.74	43.20	40.84	56.00	46.00	-12.80	-5.16

Remark:
 1. All readings are Quasi-Peak and Average values.
 2. Factor = Insertion Loss + Cable Loss.

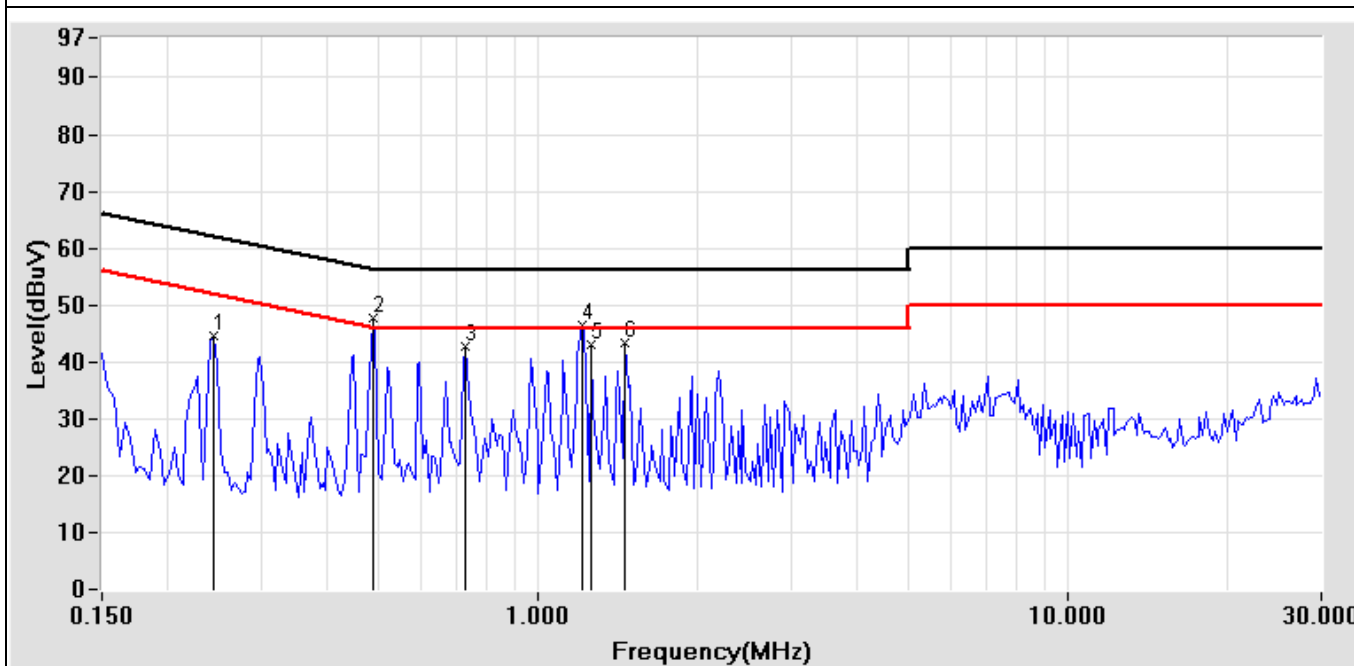

Test Mode: Mode 2: Working Mode (PoE Adapter)


3 Telecommunication Ports Conducted Emission Measurement

3.1 Instrument

Instrument	Manufacturer	Model	Serial No.	Next Cal. Date
EMI Test Receiver	Rohde & Schwarz	ESCS 30	830245/027	2010/10/14
RF Cable	HARBOUR	RG400	CBL32	2011/03/15
L.I.S.N.	Schwarzbeck	NNLK8121	8121417	2010/07/21
L.I.S.N.	Rohde & Schwarz	ESH3-Z5	100176	2011/02/18
ISN	FCC	FCC-TLISN-T8-02	20417	2011/06/14

Note: The above equipments are within the valid calibration period.

3.2 Block Diagram of Test Configuration

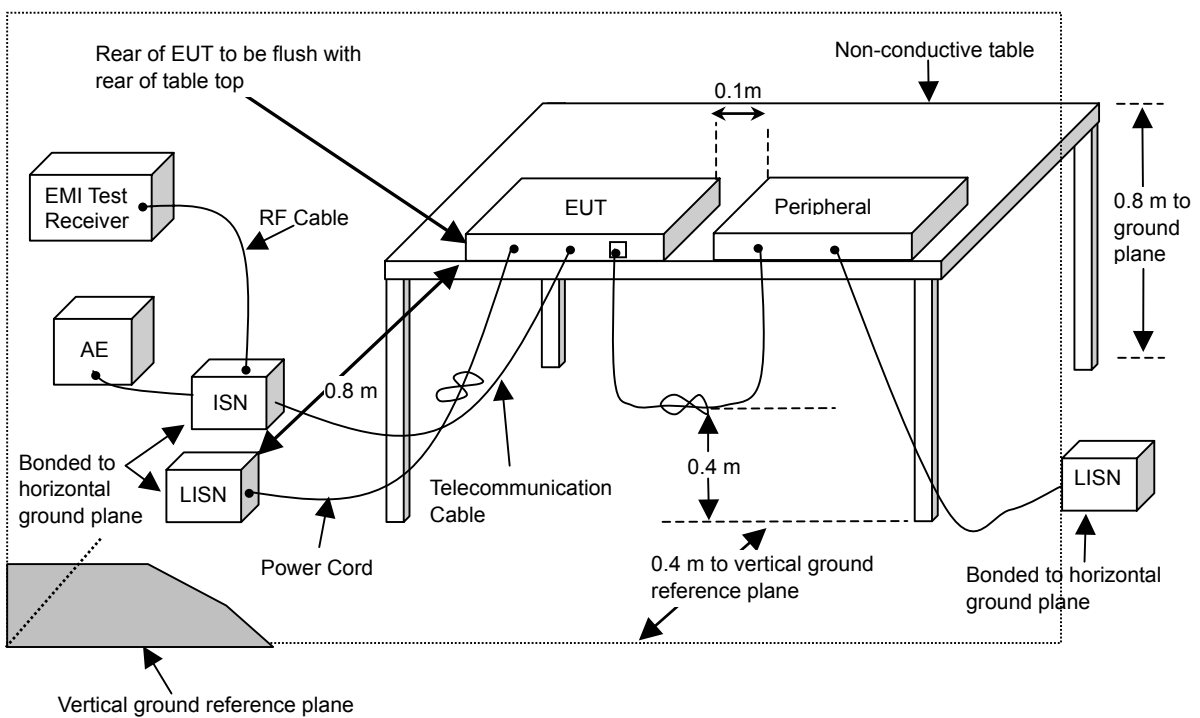

3.3 Conducted Limit (Telecommunication ports)

- Voltage Limits for Class A equipment
- Current Limits for Class A equipment

Frequency range (MHz)	Voltage Limits (dB μ V)		Current Limits (dB μ A)	
	Q.P. (Quasi-Peak)	A.V. (Average)	Q.P. (Quasi-Peak)	A.V. (Average)
0.15 ~ 0.50	97 to 87	84 to 74	53 to 43	40 to 30
0.50 ~ 30	87	74	43	30

NOTE 1 – The limits decrease linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

NOTE 2 – The current and voltage disturbance limits are derived for use with an impedance stabilization network (ISN) which presents a common mode (asymmetric mode) impedance of 150 Ω to the telecommunication port under test (conversion factor is $20 \log_{10} 150 / 1 = 44$ dB).

- Voltage Limits for Class B equipment
- Current Limits for Class B equipment

Frequency range (MHz)	Voltage Limits (dB μ V)		Current Limits (dB μ A)	
	Q.P. (Quasi-Peak)	A.V. (Average)	Q.P. (Quasi-Peak)	A.V. (Average)
0.15 ~ 0.50	84 to 74	74 to 64	40 to 30	30 to 20
0.50 ~ 30	74	64	30	20

NOTE 1 – The limits decrease linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5MHz.

NOTE 2 – The current and voltage disturbance limits are derived for use with an impedance stabilization network (ISN), which presents a common mode (asymmetric mode) impedance of 150 Ω to the telecommunication port under test (conversion factor is $20 \log_{10} 150 / 1 = 44$ dB).

3.4 Instrument configuration

- 3.4.1 Set the EMI test receiver frequency range from 150 kHz to 30 MHz.
- 3.4.2 Set the EMI test receiver bandwidth at 9kHz.
- 3.4.3 Set the EMI test receiver detector as Quasi-Peak (Q.P.) and Average (A.V.).

3.5 Configuration of Measurement

- 3.5.1 Measurement is made at telecommunication ports using ISNs with longitudinal conversion losses (LCL) as defined in EN 55022 Section 9.6.2.
- 3.5.2 The manufacturer shall demonstrate that the equipment does not exceed the Conducted limits of Telecommunication ports when tested with the ISN according to the cable category specified by the equipment documentation provided to the user.
- 3.5.3 In order to make reliable emission measurements representative of high LAN utilization it is only necessary to create a condition of LAN utilization in excess of 10% and sustain that level for a minimum of 250ms. The content of the test traffic should consist of both periodic and pseudo-random messages in order to emulate realistic types of data transmission (e.g. random: files compressed or encrypted; periodic: uncompressed graphic files, memory dumps, screen updates, disk images).
- a) Voltage measurement at balanced telecommunication ports intended for connection to unscreened balanced pairs. (See EN 55022 Section 9.6.3.1.)
 - b) Current measurements at balanced telecommunication ports intended for connection to unscreened balanced pairs. (See EN 55022 Section 9.6.3.2.)
 - c) Voltage measurements at telecommunication ports intended for connection to screened cables or to coaxial cables. (See EN 55022 Section 9.6.3.3.)
 - d) Current measurements at telecommunication ports intended for connection to screened cables or to coaxial cables. (See EN 55022 Section 9.6.3.4.)
 - e) Measurements at telecommunication ports intended for connection to cables containing more than four balanced pairs or to unbalanced cables. (See EN 55022 Section 9.6.3.5.)
- 3.5.4 Recording of measurements
- Of those disturbances above ($L-20\text{dB}$), where L is the limit level in logarithmic units, record at least the disturbance levels and the frequencies of the six highest disturbances from each mains port and each telecommunication port, which comprise the EUT. For the mains port, the current-carrying conductor for each disturbance shall be identified.

3.6 Test Result

PASS.


The final test data is shown as following pages.

Telecommunication Ports Conducted Emission Test Data

EUT: Vanadal Dome Network Camera CLIENT: VIVOTEK INC. MODEL: FD8134 RATING: 230V/50Hz Temperature: 24.4 °C Humidity: 63 %	POLARITY: DISTANCE: Serial No.: FILE/DATA#: VIVOTEK.emi/4 OPERATOR: Elli TEST SITE: Conduction1
--	--

Frequency (MHz)	Factor (dB)	Meter Reading (dBµV)		Emission Level (dBµV)		Limits (dBµV)		Margin (dB)	
		Quasi-Peak	Average	Quasi-Peak	Average	Quasi-Peak	Average	Quasi-Peak	Average
0.255	9.89	38.82	29.10	48.71	38.99	79.59	69.59	-30.88	-30.60
0.435	9.82	47.97	37.27	57.79	47.09	75.16	65.16	-17.37	-18.07
0.654	9.76	39.74	28.33	49.50	38.09	74.00	64.00	-24.50	-25.91
1.365	9.73	35.98	27.87	45.71	37.60	74.00	64.00	-28.29	-26.40
13.420	9.83	36.93	33.98	46.76	43.81	74.00	64.00	-27.24	-20.19
16.228	9.83	37.49	35.01	47.32	44.84	74.00	64.00	-26.68	-19.16

Remark:
 1. All readings are Quasi-Peak and Average values.
 2. Factor = Insertion Loss + Cable Loss.

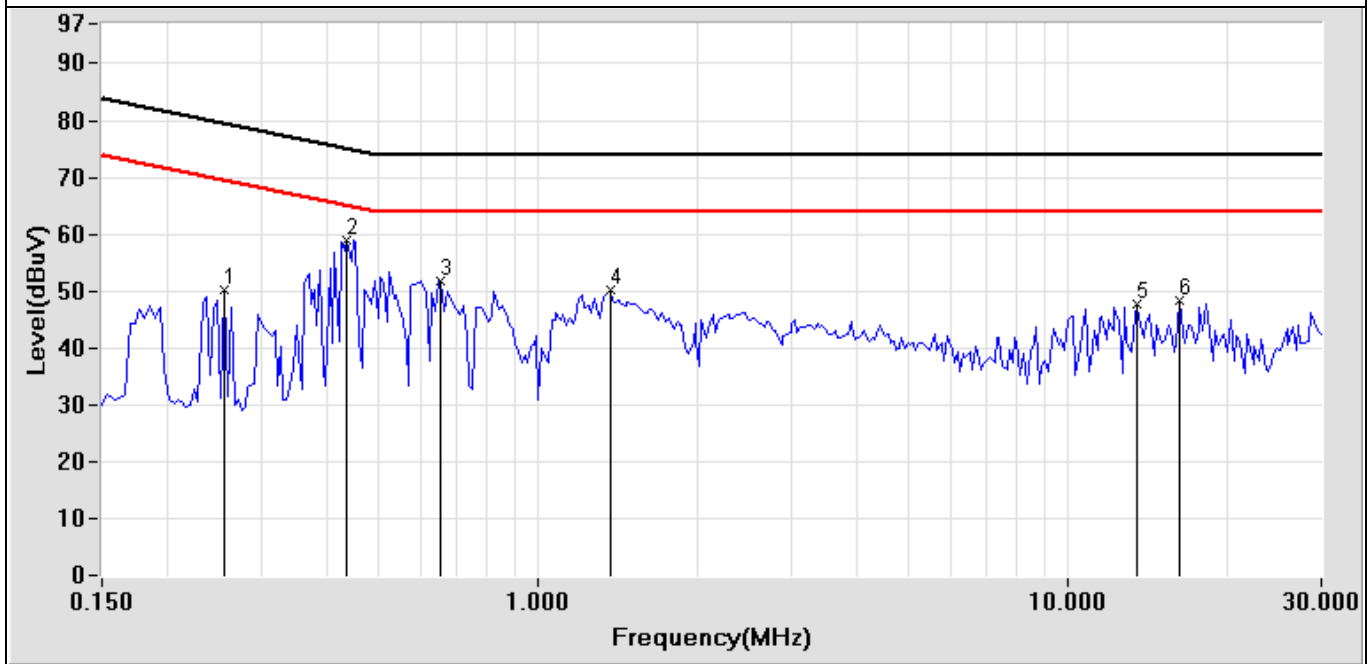


Test Mode: Mode 1: RJ45 (LAN 100Mbps) (AC to DC Adapter)

Telecommunication Ports Conducted Emission Test Data

EUT: Vanadal Dome Network Camera CLIENT: VIVOTEK INC. MODEL: FD8134 RATING: From PoE Temperature: 24.4 °C Humidity: 63 %	POLARITY: DISTANCE: Serial No.: FILE/DATA#: VIVOTEK.emi/3 OPERATOR: Elli TEST SITE: Conduction1
---	--

Frequency (MHz)	Factor (dB)	Meter Reading (dBµV)		Emission Level (dBµV)		Limits (dBµV)		Margin (dB)	
		Quasi-Peak	Average	Quasi-Peak	Average	Quasi-Peak	Average	Quasi-Peak	Average
0.298	9.91	35.44	34.71	45.35	44.62	78.30	68.30	-32.95	-23.68
0.447	9.82	33.90	32.98	43.72	42.80	74.93	64.93	-31.21	-22.13
1.267	9.73	31.80	29.20	41.53	38.93	74.00	64.00	-32.47	-25.07
5.357	9.82	36.81	33.67	46.63	43.49	74.00	64.00	-27.37	-20.51
12.748	9.83	39.35	35.33	49.18	45.16	74.00	64.00	-24.82	-18.84
18.244	9.82	37.75	35.19	47.57	45.01	74.00	64.00	-26.43	-18.99

Remark:
 1. All readings are Quasi-Peak and Average values.
 2. Factor = Insertion Loss + Cable Loss.

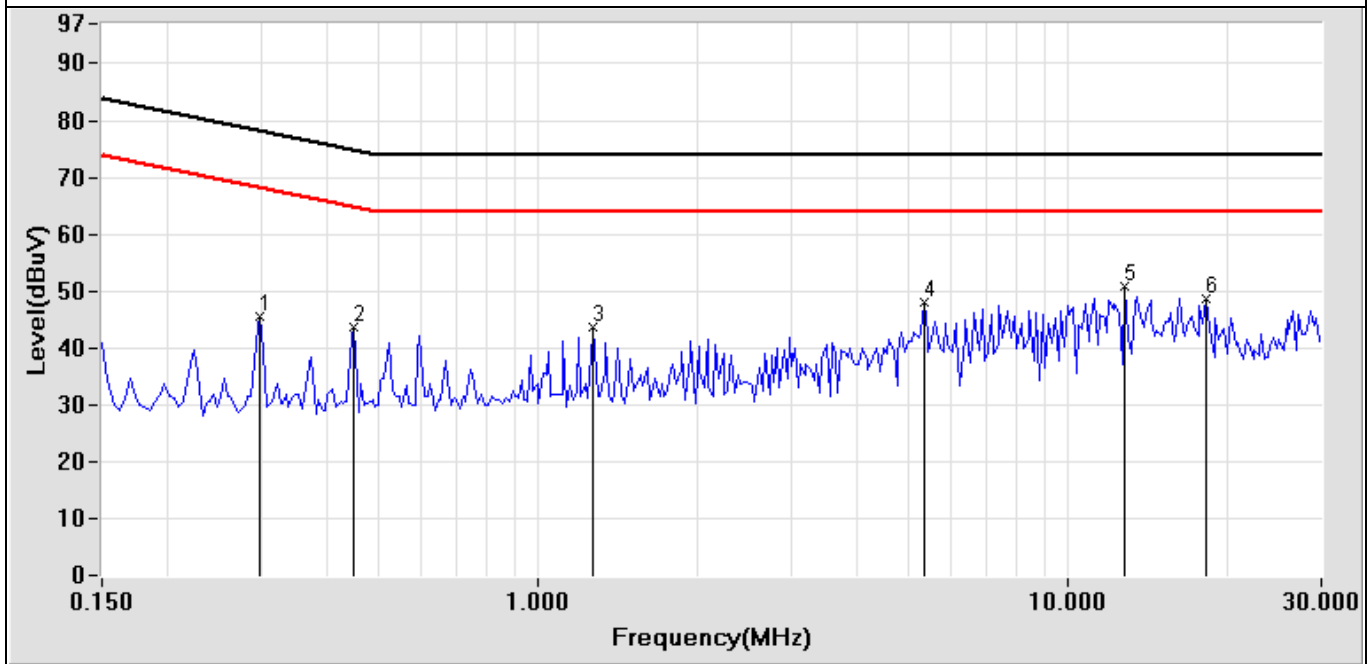

Test Mode: Mode 2: RJ45 (LAN 100Mbps) (PoE Adapter)

4 Radiated Emission Measurement (Below 1GHz)


4.1 Instrument

Instrument	Manufacturer	Model	Serial No.	Next Cal. Date
EMI Test Receiver	Rohde & Schwarz	ESVS10	826148/011	2010/07/08
Spectrum Analyzer	Advantest	R3162	131201395	2011/04/25
Biconical Antenna	Schwarzbeck	VHA 9103	2484	2010/10/09
Log Antenna	Schwarzbeck	UHALP 9108	A 0765	2010/10/09
Pre-Amplifier	SCHAFFNER	CPA9231A	3349	2010/08/04
RF Cable	IETC	8DFB	CBL14	2010/07/13

Note: The above equipments are within the valid calibration period.

4.2 Block Diagram of Test Configuration

Measurement Frequency under 1GHz

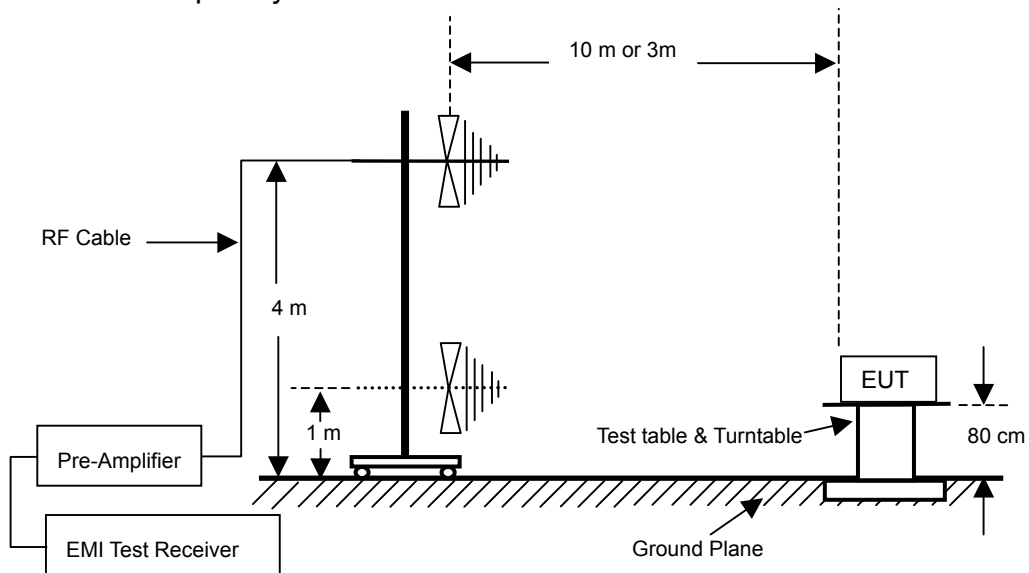

4.3 Radiated Limits

EN 55022 / AS/NZS CISPR 22

Frequency (MHz)	<input type="checkbox"/> Class A	<input checked="" type="checkbox"/> Class B
	Quasi-Peak dB(μ V/m)	Quasi-Peak dB(μ V/m)
30 ~ 230	40.0	30.0
230 ~ 1000	47.0	37.0

EN 61000-6-3

Frequency (MHz)	Quasi-Peak dB(μ V/m)
30 ~ 230	30.0
230 ~ 1000	37.0

4.4 Instrument configuration

- 4.4.1 Set the EMI test receiver frequency range from 30 MHz to 1000 MHz.
- 4.4.2 Set the EMI test receiver bandwidth at 120 kHz.
- 4.4.3 Set the EMI test receiver detector as Quasi-Peak (Q.P.).

4.5 Configuration of Measurement

- 4.5.1 The EUT was placed on a non-conductive table whose total height equaled 80cm. The turntable can rotate 360 degree to determine the position of the maximum emission level.
- 4.5.2 The EUT was set 10 meters away from the receiving antenna that was mounted on a non-conductive mast. The antenna can move up and down between 1 to 4 meters to find out the maximum emission level.
- 4.5.3 The initial testing identified the frequency that has the highest disturbance relative to the limit while operating the EUT in typical modes of operation and cable positions in a test setup representative of typical system configuration.
- 4.5.4 The identification of the frequency of highest emission with respect to the limit was found by investigating emissions at a number of significant frequencies. The probable frequency of maximum emission had been found and that the associated cable and EUT configuration and mode of operation had been identified.

4.6 Test Result

PASS.

The final test data is shown as following pages.


Radiated Emission Measurement Data

EUT: Network Camera CLIENT: VIVOTEK INC. MODEL: FD8134 RATING: 230V/50Hz Temperature: 25.9 °C Humidity: 54 %	POLARITY: Horizontal DISTANCE: 10 m Serial No.: FILE/DATA#: VIVOTEK.emi/23 OPERATOR: Elli TEST SITE: OATS 2
---	--

Frequency	Factor	Meter Reading	Emission Level	Limits	Margin
(MHz)	(dB)	(dBμV)	(dBμV/m)	(dBμV/m)	(dB)
141.780 **	-17.34	35.82	18.48	30.00	-11.52
162.000 **	-16.14	39.22	23.08	30.00	-6.92
182.232 **	-15.25	37.21	21.96	30.00	-8.04
222.700 **	-14.57	41.93	27.36	30.00	-2.64
250.000 **	-13.83	47.52	33.69	37.00	-3.31
270.000 **	-12.89	44.20	31.31	37.00	-5.69
500.000 **	-11.93	40.10	28.17	37.00	-8.83
540.000 **	-11.40	44.20	32.80	37.00	-4.20
625.000 **	-10.13	39.76	29.63	37.00	-7.37
810.000 **	-8.70	38.12	29.42	37.00	-7.58

Remark:

1. " * " Mark means readings are Peak Values.
2. " ** " Mark means readings are Quasi-Peak values.
3. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

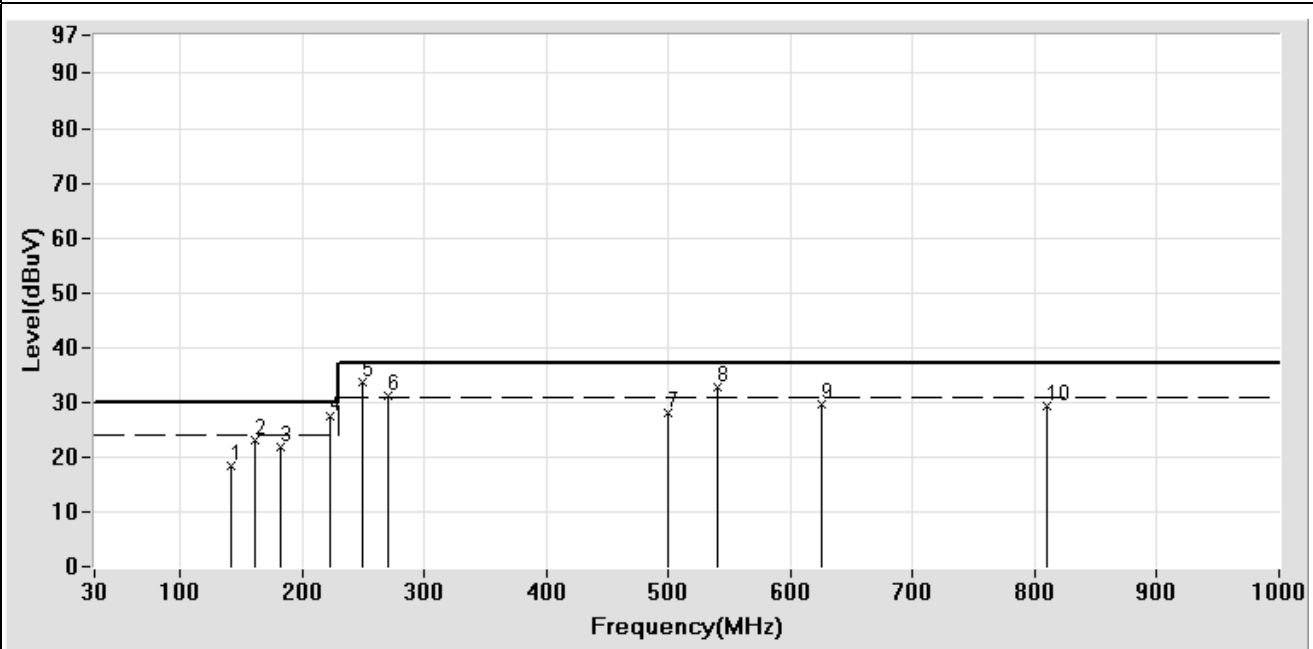

Test Mode: Mode 1: Working Mode (AC to DC Adapter)


Radiated Emission Measurement Data

EUT: Network Camera CLIENT: VIVOTEK INC. MODEL: FD8134 RATING: 230V/50Hz Temperature: 25.9 °C Humidity: 54 %	POLARITY: Vertical DISTANCE: 10 m Serial No.: FILE/DATA#: VIVOTEK.emi/22 OPERATOR: Elli TEST SITE: OATS 2
---	--

Frequency	Factor	Meter Reading	Emission Level	Limits	Margin
(MHz)	(dB)	(dBμV)	(dBμV/m)	(dBμV/m)	(dB)
141.700 **	-18.08	38.21	20.13	30.00	-9.87
162.000 **	-16.08	42.96	26.88	30.00	-3.12
182.980 **	-14.88	36.85	21.97	30.00	-8.03
222.730 **	-14.22	39.34	25.12	30.00	-4.88
250.000 **	-13.43	47.21	33.78	37.00	-3.22
263.300 **	-12.04	46.00	33.96	37.00	-3.04
450.000 **	-12.70	42.53	29.83	37.00	-7.17
540.000 **	-10.90	43.33	32.43	37.00	-4.57
648.000 **	-9.61	39.73	30.12	37.00	-6.88
750.000 **	-8.46	38.20	29.74	37.00	-7.26

Remark:

1. " * " Mark means readings are Peak Values.
2. " ** " Mark means readings are Quasi-Peak values.
3. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

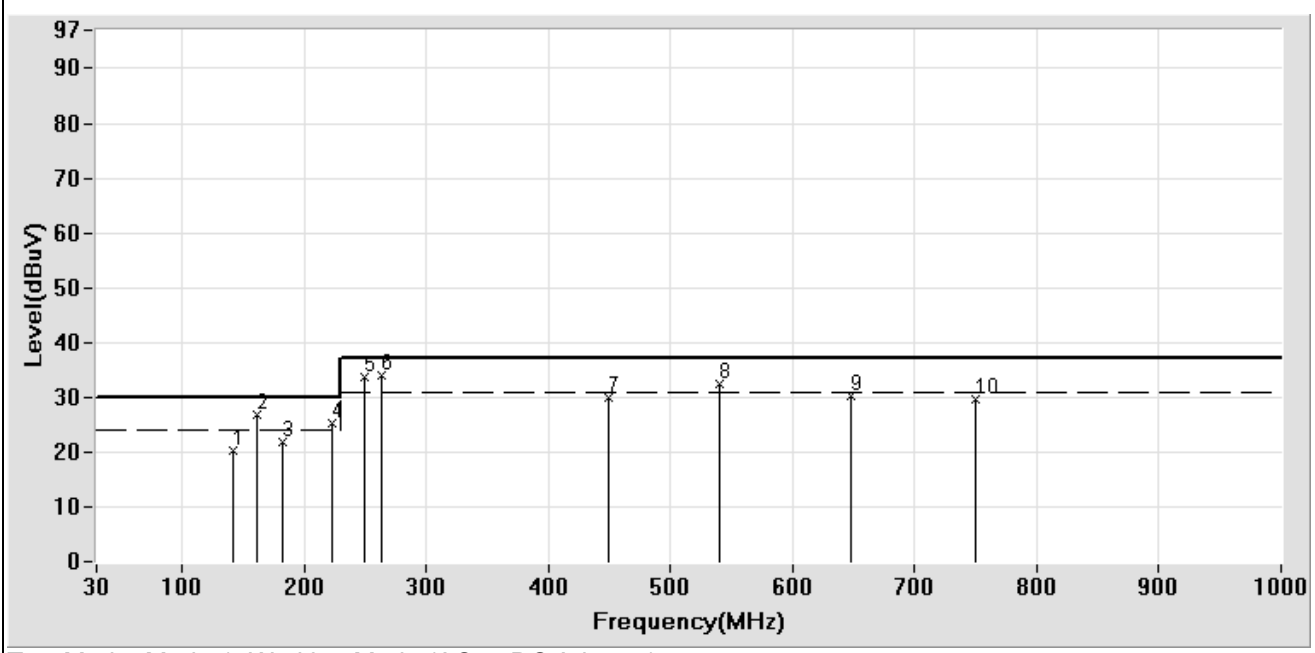

Test Mode: Mode 1: Working Mode (AC to DC Adapter)


Radiated Emission Measurement Data

EUT: Network Camera CLIENT: VIVOTEK INC. MODEL: FD8134 RATING: From PoE Temperature: 25.9 °C Humidity: 54 %	POLARITY: Horizontal DISTANCE: 10 m Serial No.: FILE/DATA#: VIVOTEK.emi/20 OPERATOR: Elli TEST SITE: OATS 2
--	--

Frequency	Factor	Meter Reading	Emission Level	Limits	Margin
(MHz)	(dB)	(dBμV)	(dBμV/m)	(dBμV/m)	(dB)
141.768 **	-17.34	38.69	21.35	30.00	-8.65
162.000 **	-16.14	40.95	24.81	30.00	-5.19
182.248 **	-15.25	36.50	21.25	30.00	-8.75
222.750 **	-14.57	43.30	28.73	30.00	-1.27
250.000 **	-13.83	45.00	31.17	37.00	-5.83
263.235 **	-13.42	44.82	31.40	37.00	-5.60
405.000 **	-13.50	42.30	28.80	37.00	-8.20
540.000 **	-11.40	43.34	31.94	37.00	-5.06
625.000 **	-10.13	39.05	28.92	37.00	-8.08
750.000 **	-8.76	35.83	27.07	37.00	-9.93

Remark:

1. " * " Mark means readings are Peak Values.
2. " ** " Mark means readings are Quasi-Peak values.
3. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

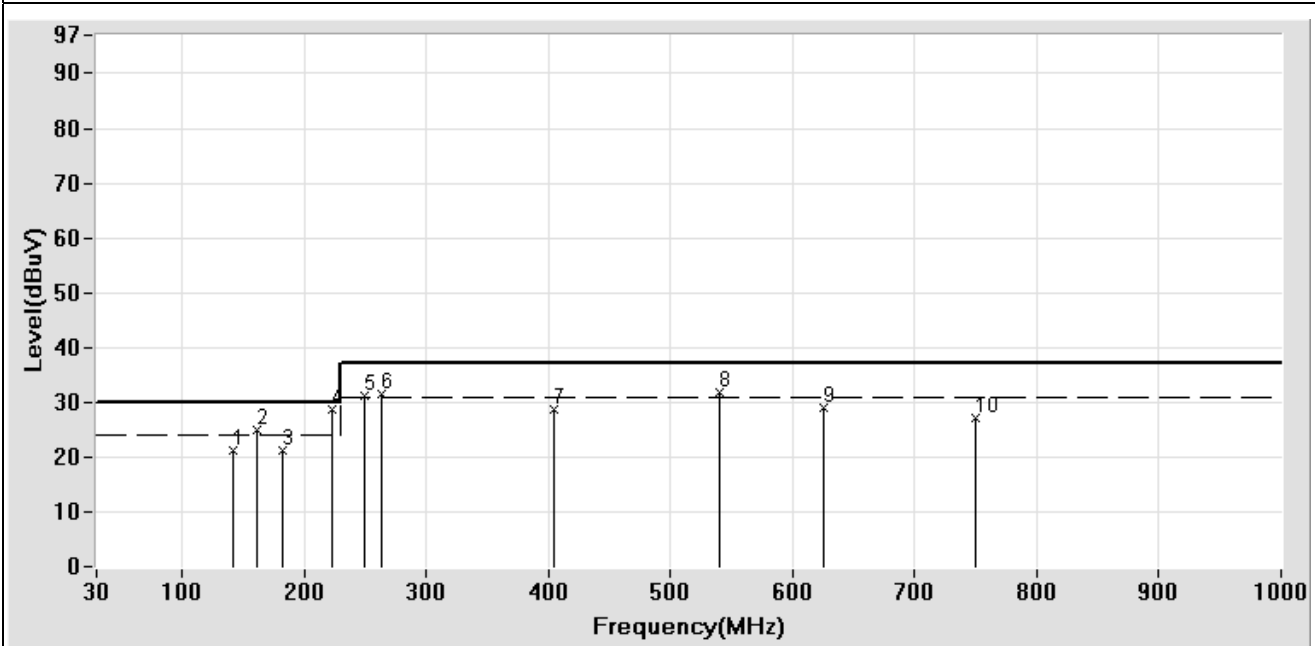

Test Mode: Mode 2: Working Mode (PoE Adapter)


Radiated Emission Measurement Data

EUT: Network Camera CLIENT: VIVOTEK INC. MODEL: FD8134 RATING: From PoE Temperature: 25.9 °C Humidity: 54 %	POLARITY: Vertical DISTANCE: 10 m Serial No.: FILE/DATA#: VIVOTEK.emi/21 OPERATOR: Elli TEST SITE: OATS 2
--	--

Frequency	Factor	Meter Reading	Emission Level	Limits	Margin
(MHz)	(dB)	(dBμV)	(dBμV/m)	(dBμV/m)	(dB)
141.768 **	-18.08	36.43	18.35	30.00	-11.65
182.270 **	-14.90	38.20	23.30	30.00	-6.70
222.754 **	-14.22	36.97	22.75	30.00	-7.25
250.000 **	-13.43	45.73	32.30	37.00	-4.70
263.240 **	-12.05	44.63	32.58	37.00	-4.42
405.000 **	-12.90	40.62	27.72	37.00	-9.28
501.000 **	-12.15	40.16	28.01	37.00	-8.99
539.890 **	-10.91	43.67	32.76	37.00	-4.24
607.420 **	-9.93	39.43	29.50	37.00	-7.50
729.110 **	-8.72	37.52	28.80	37.00	-8.20

Remark:

1. " * " Mark means readings are Peak Values.
2. " ** " Mark means readings are Quasi-Peak values.
3. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

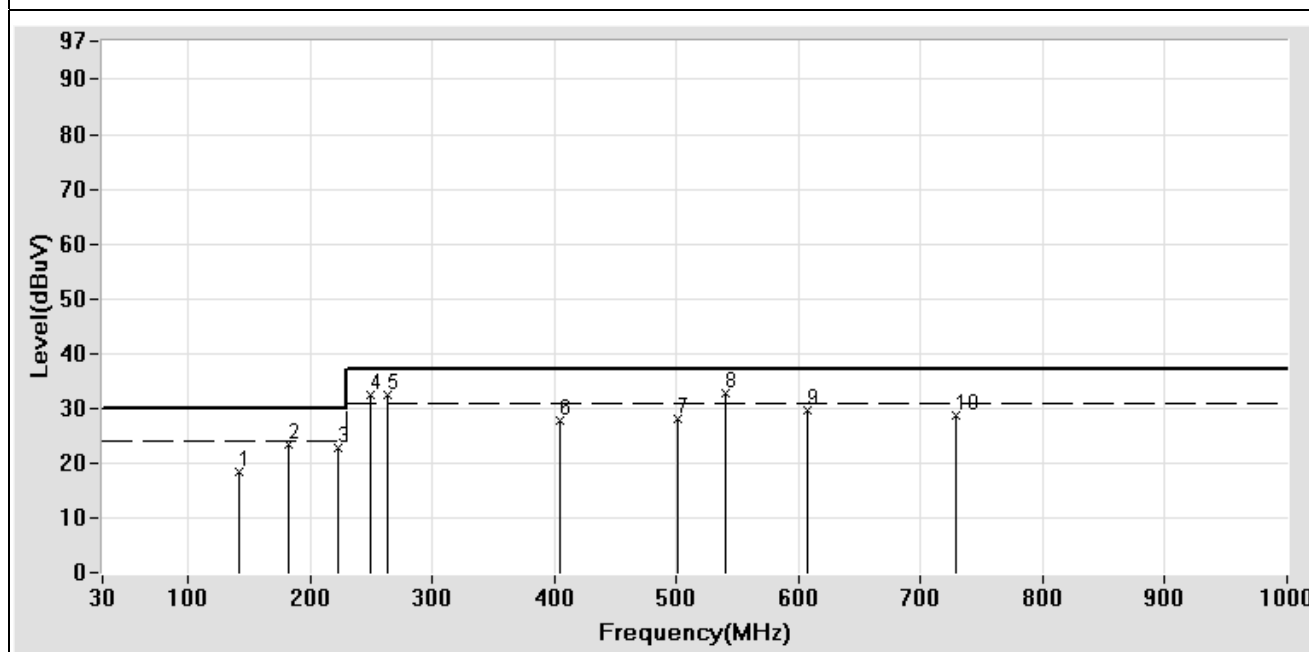

Test Mode: Mode 2: Working Mode (PoE Adapter)


5 Harmonic Current Emissions Measurement (EN 61000-3-2)

5.1 Instrument

Instrument	Manufacturer	Model	Serial No.	Next Cal. Date
EMC EMISSION TESTER	EMC PARTMER	HARMONICS-1000	41	2011/04/15

Note: The above equipments are within the valid calibration period.

5.2 Block Diagram of Test Configuration

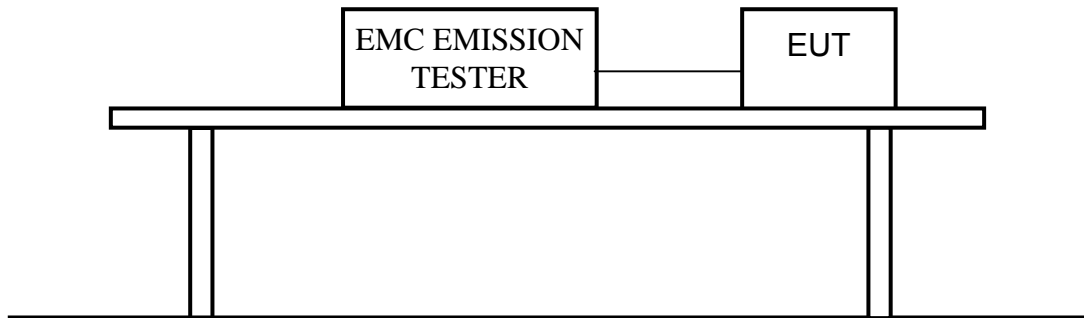

5.3 Test Limits

Class A Equipment

Harmonic order (n)	Maximum permissible harmonic current (A)
Odd harmonics	
3	2.30
5	1.14
7	0.77
9	0.40
11	0.33
13	0.21
15 ≤ n ≤ 39	0.15 15 / n
Even harmonics	
2	1.08
4	0.43
6	0.30
8 ≤ n ≤ 40	0.23 8 / n

Class B equipment

For Class B equipment, the harmonics of the input current shall not exceed the values given in Class A equipment multiplied by a factor of 1.5.

Class C equipment

Harmonic order (n)	Maximum permissible harmonic current expressed as a percentage of the input current at the fundamental frequency %
2	2
3	30. λ *
5	10
7	7
9	5
11 ≤ n ≤ 39 (odd harmonics only)	3

* λ is the circuit power factor

Class D equipment

Harmonic order (n)	Maximum permissible harmonic current Per watt (mA/W)	Maximum permissible harmonic current (A)
3	3.4	2.30
5	1.9	1.14
7	1.0	0.77
9	0.5	0.40
11	0.35	0.33
13 ≤ n ≤ 39 (odd harmonics only)	3.85/n	See Class A equipment

5.4 Configuration of Measurement

- 5.4.1 The EUT with power analyzer was in series and supplied from a power source with the same nominal voltage and frequency as the rated supply voltage.
- 5.4.2 Set the output of the power analyzer to the rated voltage and frequency of EUT (230V, 50Hz).
- 5.4.3 The EUT was classified by clause 5. of EN61000-3-2.

5.5 Test Result

PASS.

The measured result is shown as following pages.


Mode 1: Working Mode (AC to DC Adapter)

Harmonic Emission - IEC 61000-3-2 , EN 61000-3-2

Comply: IEC 61000-3-2 Ed.3.0 - IEC 61000-4-7 Ed.2.0

VIVOTEK INC.

Operator : Elli
 Unit : Network Camera
 Serialnumber : M/N: FD8134
 Remarks T: 25.1°C H: 48%

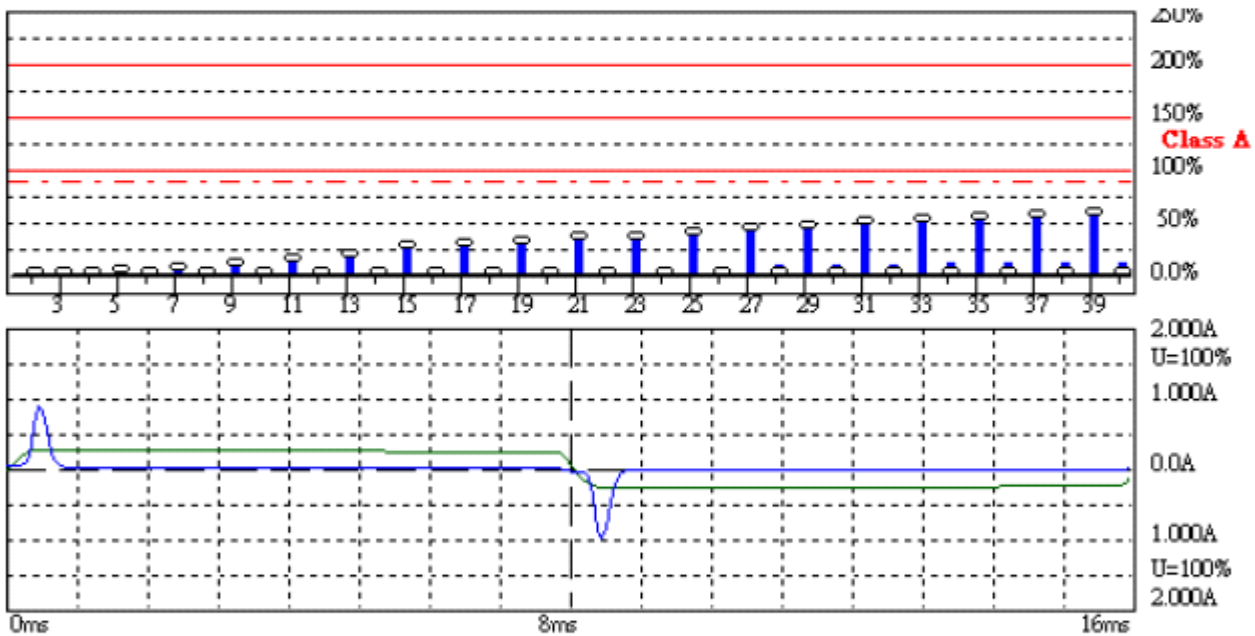

Harmonic Emission - IEC 61000-3-2 , EN 61000-3-2

2010/5/21 下午 05:31

U_{rms} = 55.17 V P = 2.454 W THC = 0.165 A
 I_{rms} = 0.153 A pf = 0.290

Range: 2 A
 V-nom: 230 V
 TestTime: 10 min (100%)

Test completed, Result: PASSED

T: 25.1°C H: 48%

BAR-1000 EMC-Param

Full Bar : Actual Values
 Empty Bar : Maximum Values
 Blue : Current , Green : Voltage , Red : Failed

Measurement

Date : 2010/5/21 PM: 05:31 V4.18

Urms = 55.17V Freq = 60.015 Range: 2 A
 Irms = 0.153A Ipk = 1.175A cf = 7.662
 P = 2.454W S = 8.459VA pf = 0.290
 THDi = 96.2 % THDu = 40.5 % Class A

Test - Time : 10min (100 %)

Test completed, Result: PASSED

Order	Freq. [Hz]	Iavg [A]	Iavg%L [%]	Imax [A]	Imax%L [%]	Limit [A]	Status
1	60	0.0545		1.9852			
2	120	0.0000	0.0000	0.0020	0.1808	1.0800	
3	180	0.0463	2.0123	0.0471	2.0487	2.3000	
4	240	0.0000	0.0000	0.0018	0.4258	0.4300	
5	300	0.0456	3.9991	0.0464	4.0690	1.1400	
6	360	0.0000	0.0000	0.0020	0.6510	0.3000	
7	420	0.0445	5.7804	0.0454	5.8974	0.7700	
8	480	0.0000	0.0000	0.0021	0.9023	0.2300	
9	540	0.0431	10.785	0.0439	10.986	0.4000	
10	600	0.0000	0.0000	0.0023	1.2605	0.1840	
11	660	0.0416	12.603	0.0425	12.873	0.3300	
12	720	0.0000	0.0000	0.0026	1.6718	0.1533	
13	780	0.0400	19.048	0.0410	19.531	0.2100	
14	840	0.0000	0.0000	0.0028	2.1362	0.1314	
15	900	0.0385	25.668	0.0394	26.286	0.1500	
16	960	0.0000	0.0000	0.0031	2.6537	0.1150	
17	1020	0.0372	28.112	0.0381	28.776	0.1324	
18	1080	0.0000	0.0000	0.0033	3.2242	0.1022	
19	1140	0.0362	30.561	0.0370	31.234	0.1184	
20	1200	0.0000	0.0000	0.0035	3.8479	0.0920	
21	1260	0.0355	33.118	0.0361	33.724	0.1071	
22	1320	0.0000	0.0000	0.0037	4.3786	0.0836	
23	1380	0.0351	35.860	0.0355	36.312	0.0978	
24	1440	0.0000	0.0000	0.0038	4.9359	0.0767	
25	1500	0.0349	38.793	0.0353	39.198	0.0900	
26	1560	0.0000	0.0000	0.0039	5.5197	0.0708	
27	1620	0.0349	41.872	0.0352	42.188	0.0833	
28	1680	0.0000	0.0000	0.0040	6.1301	0.0657	
29	1740	0.0349	45.005	0.0352	45.313	0.0776	
30	1800	0.0000	0.0000	0.0040	6.5679	0.0613	
31	1860	0.0349	48.061	0.0352	48.438	0.0726	
32	1920	0.0000	0.0000	0.0040	7.0058	0.0575	
33	1980	0.0347	50.909	0.0350	51.383	0.0682	
34	2040	0.0000	0.0000	0.0042	7.6692	0.0541	
35	2100	0.0343	53.413	0.0347	53.928	0.0643	
36	2160	0.0000	0.0000	0.0042	8.1203	0.0511	
37	2220	0.0337	55.447	0.0341	56.006	0.0608	
38	2280	0.0000	0.0000	0.0043	8.8236	0.0484	
39	2340	0.0329	56.953	0.0332	57.552	0.0577	
40	2400	0.0000	0.0000	0.0044	9.5533	0.0460	

Important:

- 100% of time voltage "out of Spec"

Calculation of Individual Harmonic Limits

Fixed Limits for Class A:

Order	Limits in Ampere			
	90%	100%	150%	200%
2	0.9720	1.0800	1.6199	2.1599
3				
4	0.3870	0.4301	0.6451	0.8601
5	1.0260	1.1400	1.7100	2.2800
6	0.2700	0.3000	0.4501	0.6001
7	0.6930	0.7700	1.1550	1.5400
8	0.2070	0.2300	0.3450	0.4600
9	0.3600	0.4000	0.6000	0.8000
10	0.1656	0.1840	0.2759	0.3679
11	0.2970	0.3300	0.4949	0.6599
12	0.1380	0.1533	0.2300	0.3066
13	0.1890	0.2100	0.3149	0.4199
14	0.1183	0.1315	0.1972	0.2629
15	0.1350	0.1500	0.2250	0.3000
16	0.1035	0.1150	0.1725	0.2300
17	0.1191	0.1323	0.1985	0.2646
18	0.0920	0.1022	0.1533	0.2043
19	0.1066	0.1184	0.1776	0.2368
20	0.0828	0.0920	0.1381	0.1841
21 *	0.0965	0.1072	0.1608	0.2144
22	0.0753	0.0836	0.1254	0.1672
23 *	0.0880	0.0978	0.1467	0.1956
24	0.0690	0.0767	0.1150	0.1533
25 *	0.0810	0.0900	0.1349	0.1799
26	0.0637	0.0708	0.1062	0.1416
27 *	0.0750	0.0834	0.1251	0.1667
28	0.0591	0.0657	0.0985	0.1313
29 *	0.0699	0.0776	0.1165	0.1553
30	0.0552	0.0613	0.0919	0.1226
31 *	0.0654	0.0726	0.1089	0.1453
32	0.0517	0.0575	0.0862	0.1150
33 *	0.0614	0.0682	0.1024	0.1365
34	0.0487	0.0541	0.0811	0.1082
35 *	0.0579	0.0643	0.0965	0.1287
36	0.0460	0.0511	0.0767	0.1023
37 *	0.0547	0.0608	0.0912	0.1216
38	0.0436	0.0485	0.0727	0.0969
39 *	0.0520	0.0577	0.0866	0.1155
40	0.0414	0.0460	0.0690	0.0920

EUT is PASSED if:

- all Average values of the Individual Harmonic Currents (I_{avg}) are below 100% of the Individual Limits.
- all Maximum values of the Individual Harmonic Currents (I_{max}) are below 150% of the Individual Limits.

Exceptions:

These exceptions are mutually exclusive and cannot be used together.

- 1) All Maximum values of the Individual Harmonic Currents (Imax) are below 200% of the Individual Limits if :
 - EUT belongs to Class A
 - AND excursion beyond 150% lasts less than 10% of observation time with a maximum of 10 minutes
 - AND the average value of the corresponding harmonic current over the entire observation period is less than 90% of applicable limits
- 2)
 - Average values of some Individual Harmonic Currents (marked with "*") may be up to 150% if the Partial Harmonic Current (PHC) is lower than the PHC which is calculated from the Limit Currents:
 - Actual PHC = 0.1094A
 - PHC calculated from Limit values = 0.2514A
 - Individual Harmonic Currents less than 5mA or less than 0.6% of Irms (which is $0.006 \times 0.153 = 0.001A$) are disregarded.

Definitions of Abbreviations

Urms	***	Actual total Voltage in Volt RMS
Irms	***	Actual total Current in Ampere RMS
Ipk	***	Actual Peak value of the Current in Ampere
cf	***	Actual Crest Factor (Ipk/Irms)
P	***	Actual Active Power in Watt
S	***	Actual Apparent Power in VA (Urms*Irms)
pf	***	Actual Power Factor (P/S)
THDi	***	Actual Total Harmonic Current Distortion in %
THDu	***	Actual Total Harmonic Voltage Distortion in %
THC	***	Actual Total Harmonic Current in Ampere
PHC	***	Actual Partial Harmonic Current in Ampere

Individual measurements for 2nd to 40th order:

Iavg	Average value of the Individual Harmonic Current in Ampere RMS
Iavg%L	Average value of the Individual Harmonic Current in percentage of the applicable Limit
Imax	Maximum Individual Harmonic Current in Ampere RMS
Imax%lim	Maximum Individual Harmonic Current in percentage of the applicable Limit
Limit Irms	Individual Limit (100%) for the selected Class in Ampere RMS

General :

- Maximum and Average values are calculated over the full test-time
- The values marked with "****" are actual values which could vary during test-time and are taken at the time of protocol printout.
- The individual measurements are taken over every 200ms and smoothed with an 1,5second filter.


Mode 2: Working Mode (PoE Adapter)

Harmonic Emission - IEC 61000-3-2 , EN 61000-3-2

Comply: IEC 61000-3-2 Ed.3.0 - IEC 61000-4-7 Ed.2.0

VIVOTEK INC.

Operator : Elli
 Unit : Network Camera
 Serialnumber : M/N: FD8134
 Remarks : T: 25.2°C H: 48%

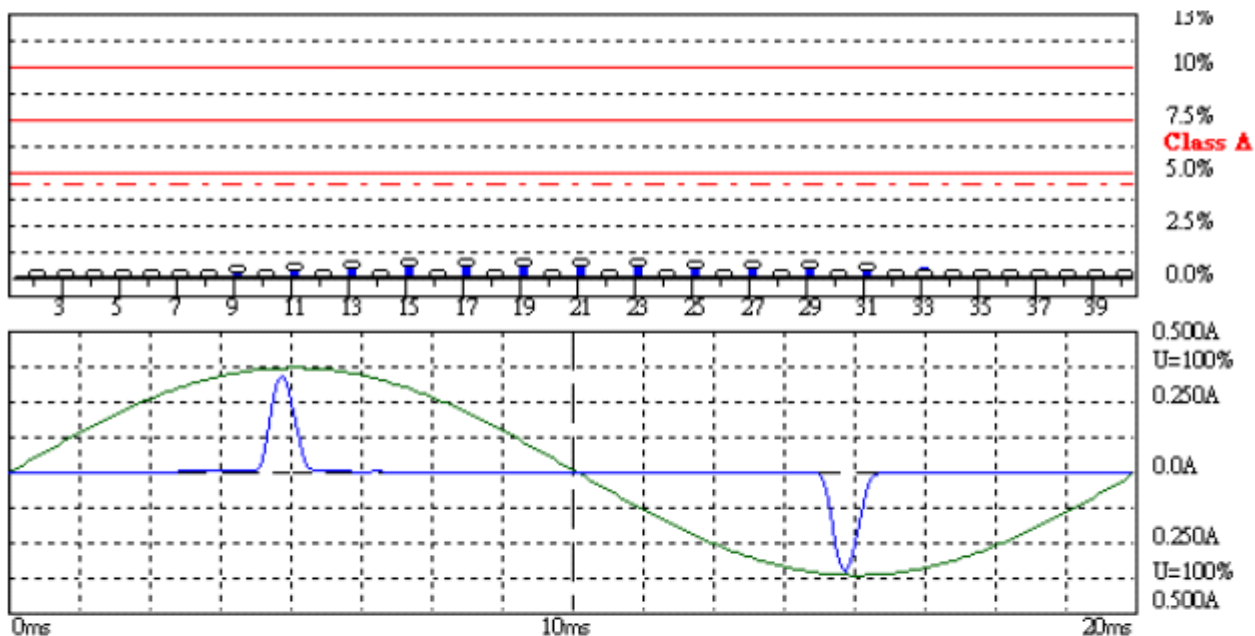

Harmonic Emission - IEC 61000-3-2 , EN 61000-3-2

2010/5/21 下午 06:19

U_{rms} = 227.4 V P = 5.878 W THD = 0.064 A
 I_{rms} = 0.066 A pf = 0.391

Range: 0.5 A
 V-nom: 230 V
 TestTime: 10 min (100%)

Test completed, Result: PASSED

T: 25.2°C H: 48%

BAR-1000 EMC-Rev10

Full Bar : Actual Values
 Empty Bar : Maximum Values
 Blue : Current , Green : Voltage , Red : Failed

Measurement

Date : 2010/5/21 PM: 06:19 V4.18

Urms = 227.4V Freq = 49.984 Range: 0.5 A
 Irms = 0.066A Ipk = 0.361A cf = 5.461
 P = 5.878W S = 15.04VA pf = 0.391
 THDi = 92.8 % THDu = 0.10 % Class A

Test - Time : 10min (100 %)

Test completed, Result: PASSED

Order	Freq. [Hz]	Iavg [A]	Iavg%L [%]	Imax [A]	Imax%L [%]	Limit [A]	Status
1	50	0.0264		0.4948			
2	100	0.0000	0.0000	0.0002	0.0170	1.0800	
3	150	0.0234	1.0159	0.0234	1.0177	2.3000	
4	200	0.0000	0.0000	0.0002	0.0426	0.4300	
5	250	0.0230	2.0201	0.0231	2.0238	1.1400	
6	300	0.0000	0.0000	0.0002	0.0509	0.3000	
7	350	0.0223	2.8964	0.0223	2.9012	0.7700	
8	400	0.0000	0.0000	0.0002	0.0663	0.2300	
9	450	0.0214	5.3569	0.0215	5.3711	0.4000	
10	500	0.0000	0.0000	0.0001	0.0663	0.1840	
11	550	0.0203	6.1489	0.0203	6.1590	0.3300	
12	600	0.0000	0.0000	0.0001	0.0796	0.1533	
13	650	0.0190	9.0628	0.0191	9.0826	0.2100	
14	700	0.0000	0.0000	0.0001	0.0697	0.1314	
15	750	0.0176	11.726	0.0176	11.759	0.1500	
16	800	0.0000	0.0000	0.0001	0.0796	0.1150	
17	850	0.0161	12.142	0.0161	12.198	0.1324	
18	900	0.0000	0.0000	0.0001	0.0896	0.1022	
19	950	0.0145	12.217	0.0145	12.267	0.1184	
20	1000	0.0000	0.0000	0.0001	0.1327	0.0920	
21	1050	0.0129	11.994	0.0129	12.077	0.1071	
22	1100	0.0000	0.0000	0.0001	0.1460	0.0836	
23	1150	0.0112	11.474	0.0113	11.574	0.0978	
24	1200	0.0000	0.0000	0.0001	0.1592	0.0767	
25	1250	0.0096	10.701	0.0097	10.817	0.0900	
26	1300	0.0000	0.0000	0.0002	0.2156	0.0708	
27	1350	0.0081	9.7244	0.0082	9.8145	0.0833	
28	1400	0.0000	0.0000	0.0002	0.2322	0.0657	
29	1450	0.0067	8.5872	0.0067	8.6928	0.0776	
30	1500	0.0000	0.0000	0.0002	0.2488	0.0613	
31	1550	0.0053	7.3441	0.0054	7.4843	0.0726	
32	1600	0.0000	0.0000	0.0002	0.3184	0.0575	
33	1650	0.0000	0.0000	0.0042	6.2215	0.0682	
34	1700	0.0000	0.0000	0.0002	0.3383	0.0541	
35	1750	0.0000	0.0000	0.0032	5.0320	0.0643	
36	1800	0.0000	0.0000	0.0002	0.3582	0.0511	
37	1850	0.0000	0.0000	0.0024	4.0148	0.0608	
38	1900	0.0000	0.0000	0.0002	0.3151	0.0484	
39	1950	0.0000	0.0000	0.0019	3.2267	0.0577	
40	2000	0.0000	0.0000	0.0002	0.3317	0.0460	

Calculation of Individual Harmonic Limits

Fixed Limits for Class A:

Order	Limits in Ampere			
	90%	100%	150%	200%
2				
3				
4	0.3870	0.4300	0.6450	0.8600
5				
6	0.2700	0.3000	0.4500	0.6000
7				
8	0.2070	0.2300	0.3450	0.4600
9	0.3600	0.4000	0.6000	0.8000
10	0.1656	0.1840	0.2760	0.3680
11	0.2970	0.3300	0.4950	0.6600
12	0.1380	0.1533	0.2300	0.3066
13	0.1890	0.2100	0.3150	0.4200
14	0.1183	0.1314	0.1972	0.2629
15	0.1350	0.1500	0.2250	0.3000
16	0.1035	0.1150	0.1725	0.2300
17	0.1191	0.1324	0.1985	0.2647
18	0.0920	0.1022	0.1534	0.2045
19	0.1066	0.1184	0.1776	0.2368
20	0.0828	0.0920	0.1380	0.1840
21 *	0.0964	0.1071	0.1607	0.2143
22	0.0753	0.0836	0.1255	0.1673
23 *	0.0881	0.0978	0.1468	0.1957
24	0.0690	0.0767	0.1150	0.1533
25 *	0.0810	0.0900	0.1350	0.1800
26	0.0637	0.0708	0.1062	0.1415
27 *	0.0750	0.0833	0.1250	0.1667
28	0.0591	0.0657	0.0986	0.1314
29 *	0.0698	0.0776	0.1164	0.1552
30	0.0552	0.0613	0.0920	0.1227
31 *	0.0653	0.0726	0.1089	0.1451
32	0.0517	0.0575	0.0862	0.1150
33 *	0.0614	0.0682	0.1023	0.1364
34	0.0487	0.0541	0.0812	0.1082
35 *	0.0579	0.0643	0.0965	0.1286
36	0.0460	0.0511	0.0767	0.1022
37 *	0.0547	0.0608	0.0912	0.1216
38	0.0436	0.0484	0.0726	0.0969
39 *	0.0519	0.0577	0.0865	0.1154
40	0.0414	0.0460	0.0690	0.0920

EUT is PASSED if:

- all Average values of the Individual Harmonic Currents (Iavg) are below 100% of the Individual Limits.
- all Maximum values of the Individual Harmonic Currents (Imax) are below 150% of the Individual Limits.

Exceptions:

These exceptions are mutually exclusive and cannot be used together.

- 1) All Maximum values of the Individual Harmonic Currents (Imax) are below 200% of the Individual Limits if :
 - EUT belongs to Class A
 - AND excursion beyond 150% lasts less than 10% of observation time with a maximum of 10 minutes
 - AND the average value of the corresponding harmonic current over the entire observation period is less than 90% of applicable limits

- 2)
 - Average values of some Individual Harmonic Currents (marked with "*") may be up to 150% if the Partial Harmonic Current (PHC) is lower than the PHC which is calculated from the Limit Currents:
 - Actual PHC = 0.0229A
 - PHC calculated from Limit values = 0.2514A

 - Individual Harmonic Currents less than 5mA or less than 0.6% of Irms (which is $0.006 \times 0.066 = 0.0004A$) are disregaded.

Definitions of Abbreviations

Urms	***	Actual total Voltage in Volt RMS
Irms	***	Actual total Current in Ampere RMS
Ipk	***	Actual Peak value of the Current in Ampere
cf	***	Actual Crest Factor (Ipk/Irms)
P	***	Actual Active Power in Watt
S	***	Actual Apparent Power in VA (Urms*Irms)
pf	***	Actual Power Factor (P/S)
THDi	***	Actual Total Harmonic Current Distortion in %
THDu	***	Actual Total Harmonic Voltage Distortion in %
THC	***	Actual Total Harmonic Current in Ampere
PHC	***	Actual Partial Harmonic Current in Ampere

Individual measurements for 2nd to 40th order:

Iavg	Average value of the Individual Harmonic Current in Ampere RMS
Iavg%L	Average value of the Individual Harmonic Current in percentage of the applicable Limit
Imax	Maximum Individual Harmonic Current in Ampere RMS
Imax%lim	Maximum Individual Harmonic Current in percentage of the applicable Limit
Limit Irms	Individual Limit (100%) for the selected Class in Ampere RMS

General :

- Maximum and Average values are calculated over the full test-time
- The values marked with "****" are actual values which could vary during test-time and are taken at the time of protocol printout.
- The individual measurements are taken over every 200ms and smoothed with an 1,5second filter.


6 Voltage Fluctuations and Flicker Measurement (EN 61000-3-3)

6.1 Instrument

Instrument	Manufacturer	Model	Serial No.	Next Cal. Date
EMC EMISSION TESTER	EMC PARTMER	HARMONICS-1000	41	2011/04/15

Note: The above equipments are within the valid calibration period.

6.2 Block Diagram of Test Configuration

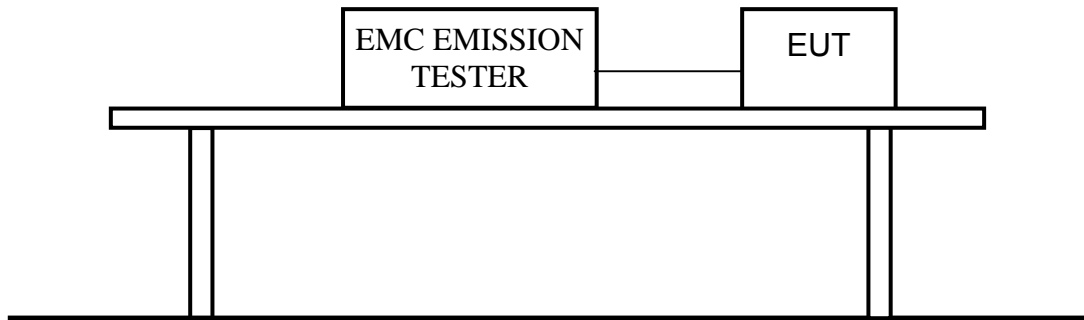

6.3 Test Limits

The following limits apply:

- the value of P_{st} shall not be greater than 1.0;
- the value of P_{it} shall not be greater than 0.65;
- the relative steady-state voltage change, d_c , shall not exceed 3.3%;
- the maximum relative voltage change, d_{max} , shall not exceed 4%;
- the value of $d(t)$ during a voltage change shall not exceed 3.3% for more than 500 ms.

6.4 Configuration of Measurement

- 6.4.1 The EUT with power analyzer is in series and supplied from a power source with the same nominal voltage and frequency as the rated supply voltage.
- 6.4.2 Set the output of the power analyzer to the rated voltage and frequency of EUT (230V, 50Hz).
- 6.4.3 Select the test time of observation period for short-term ($T_p = 10$ min) and long-term ($T_p = 2$ hrs). The test result was collected and analyzed by the computer.

6.5 Test Result

PASS.

The measured result is shown as following pages.


Mode 1: Working Mode (AC to DC Adapter)**Flicker Emission - IEC 61000-3-3 , EN 61000-3-3**

Comply: IEC 61000-3-3 Ed.1.2 - IEC 61000-4-15 Ed.1.1

VIVOTEK INC.

Operator : Elli
 Unit : Network Camera
 Serialnumber : M/N: FD8134
 Remarks : T: 24.2°C H: 53%

Flickermeter 1000-4-15 for 230V/50Hz

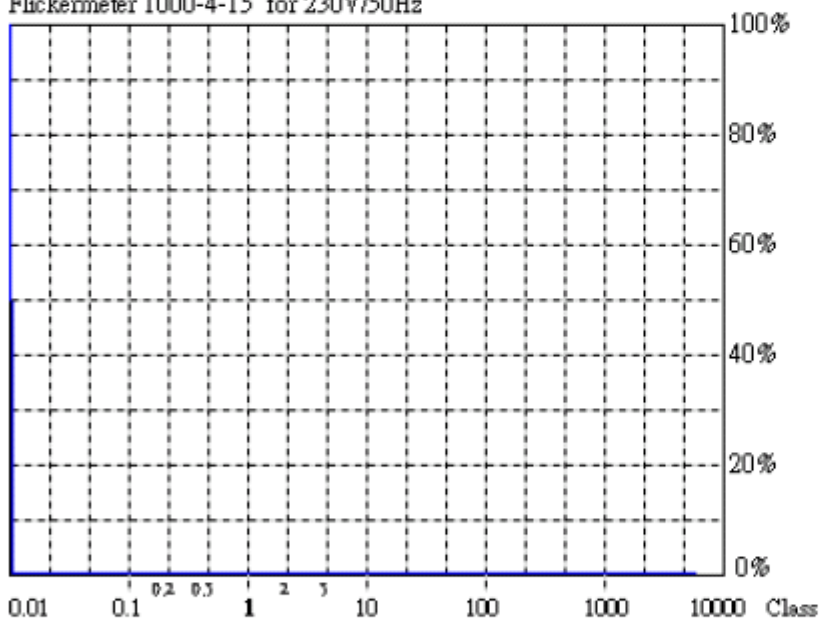

Actual Flicker (Fli): 0.00
Short-term Flicker (Pst): 0.07
 Limit (Pst): 1.00
Long-term Flicker (Plt): 0.07
 Limit (Plt): 0.65
Maximum Relative Volt. Change (dmax): 0.00%
 Limit (dmax): 4.00%
Relative Steady-state Voltage Change (dc): 0.01%
 Limit (dc): 3.30%
Maximum Interval exceeding 3.30% (dt): 0.00ms
 Limit (dt>Lim): 500ms

Flicker Emission - IEC 61000-3-3 , EN 61000-3-3

2010/5/22 上午 10:50

U_{rms} = 227.6 V P = 3.208 W
 I_{rms} = 0.041 A pf = 0.345

Range: 0.5 A
 V_{nom}: 230 V
 TestTime: 10 min (100%)

Test completed, Result: PASSED

T: 24.2°C H: 53%

BAR-1000 EMC-Printer

Full Bar : Actual Values
 Empty Bar : Maximum Values
 Circles : Average Values
 Blue : Current , Green : Voltage , Red : Failed

Measurement

Date : 2010/5/22 AM: 10:50 V4.18

Urms = 227.6V Freq = 49.984 Range: 0.5 A
 Irms = 0.041A Ipk = 0.247A cf = 6.066
 P = 3.203W S = 9.278VA pf = 0.345

Test - Time : 1 x 10min = 10min (100 %)

LIN (Line Impedance Network) : SLIN 0.24ohm +j0.15ohm N:0.16ohm +j0.10ohm

Limits : Plt : 0.65 Pst : 1.00
 dmax : 4.00 % dc : 3.30 %
 dtLim: 3.30 % dt>Lim: 500ms

Test completed, Result: PASSED

Definitions of Abbreviations

Urms *** Actual total Voltage in Volt RMS
 Irms *** Actual total Current in Ampere RMS
 Ipk *** Actual Peak value of the Current in Ampere
 cf *** Actual Crest Factor (Ipk/Irms)
 P *** Actual Active Power in Watt
 S *** Actual Apparent Power in VA (Urms*Irms)
 pf *** Actual Power Factor (P/S)

Plt Long term Flicker over all Pst cycles

For every Pst-cycle:

General :

- The values marked with "****" are actual values which could vary during test-time and are taken at the time of protocol printout.

Mode 2: Working Mode (PoE Adapter)


Flicker Emission - IEC 61000-3-3 , EN 61000-3-3

Comply: IEC 61000-3-3 Ed.1.2 - IEC 61000-4-15 Ed.1.1

VIVOTEK INC.

Operator : Elli
Unit : Network Camera
Serialnumber : M/N: FD8134
Remarks T: 25.2°C H: 48%

Flickermeter 1000-4-15 for 230V/50Hz

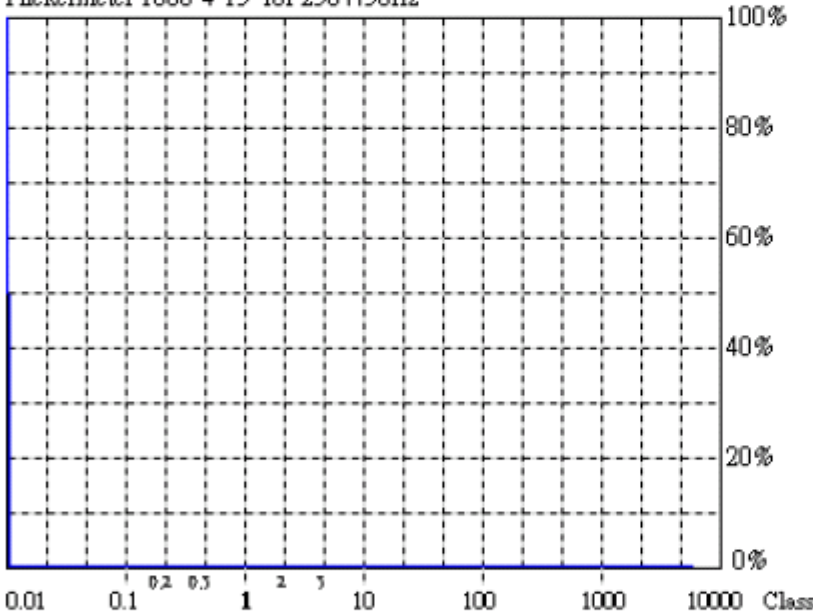

Actual Flicker (Fl): 0.00
Short-term Flicker (Pst): 0.07
Limit (Pst): 1.00
Long-term Flicker (Plt): 0.07
Limit (Plt): 0.65
Maximum Relative Volt. Change (dmax): 0.00%
Limit (dmax): 4.00%
Relative Steady-state Voltage Change (dc): 0.01%
Limit (dc): 3.30%
Maximum Interval exceeding 3.30% (dt): 0.00ms
Limit (dt>Lim): 500ms

Flicker Emission - IEC 61000-3-3 , EN 61000-3-3

2010/5/21 下午 06:53

Urms = 227.4 V P = 5.866 W
Irms = 0.066 A pf = 0.390

Range: 0.5 A
V-nom: 230 V
TestTime: 10 min (100%)

Test completed, Result: PASSED

T: 25.2°C H: 48%

BAR-1000 EMC-RevB

Full Bar : Actual Values
Empty Bar : Maximum Values
Circles : Average Values
Blue : Current , Green : Voltage , Red : Failed

Measurement

Date : 2010/5/21 PM: 06:53 V4.18

Urms = 227.4V Freq = 50.000 Range: 0.5 A
Irms = 0.066A Ipk = 0.363A cf = 5.491
P = 5.866W S = 15.04VA pf = 0.390

Test - Time : 1 x 10min = 10min (100 %)

LIN (Line Impedance Network) : SLIN 0.24ohm +j0.15ohm N:0.16ohm +j0.10ohm

Limits : Plt : 0.65 Pst : 1.00
dmax : 4.00 % dc : 3.30 %
dtLim: 3.30 % dt>Lim: 500ms

Test completed, Result: PASSED

Definitions of Abbreviations

Urms *** Actual total Voltage in Volt RMS
Irms *** Actual total Current in Ampere RMS
Ipk *** Actual Peak value of the Current in Ampere
cf *** Actual Crest Factor (Ipk/Irms)
P *** Actual Active Power in Watt
S *** Actual Apparent Power in VA (Urms*Irms)
pf *** Actual Power Factor (P/S)

Plt Long term Flicker over all Pst cycles

For every Pst-cycle:

General :

- The values marked with "****" are actual values which could vary during test-time and are taken at the time of protocol printout.

7 Performance Criterion of Immunity Test

7.1 EN 55024

Criterion	Description
A	<p>The equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the use may reasonably expect from the equipment if used as intended.</p>
B	<p>After the test, the equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomena below a performance level specified by the manufacturer, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance.</p> <p>During the test, degradation of performance is allowed. However, no change of operating state or stored data is allowed to persist after the test.</p> <p>If the minimum performance level (or the permissible performance loss) is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonable expect from the equipment if used as intended.</p>
C	<p>Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer’s instructions.</p> <p>Functions, and/or information stored in non-volatile memory, or protected by a battery backup, shall not be lost.</p>

7.2 EN 61000-6-1

Criterion	Description
A	<p>The apparatus shall continue to operate as intended during and after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended.</p> <p>The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, either of these may be derived from the product description and documentation and what the user may reasonably expect from the apparatus if used as intended.</p>
B	<p>The apparatus shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended.</p> <p>The performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed. No change of actual operating state or stored data is allowed. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, either of these may be derived from the product description and documentation and what the user may reasonably expect from the apparatus if used as intended.</p>
C	<p>Temporary loss of function is allowed, provided the function is self-recoverable or can be restored by the operation of the controls.</p>


8 Electrostatic Discharges Immunity Test (IEC 61000-4-2)

8.1 Instrument

Instrument	Manufacturer	Model	Serial No.	Next Cal. Date
ESD Simulator	EMC PARTNER	ESD3000	276	2011/01/12

Note: The above equipments are within the valid calibration period.

8.2 Block Diagram of Test Configuration

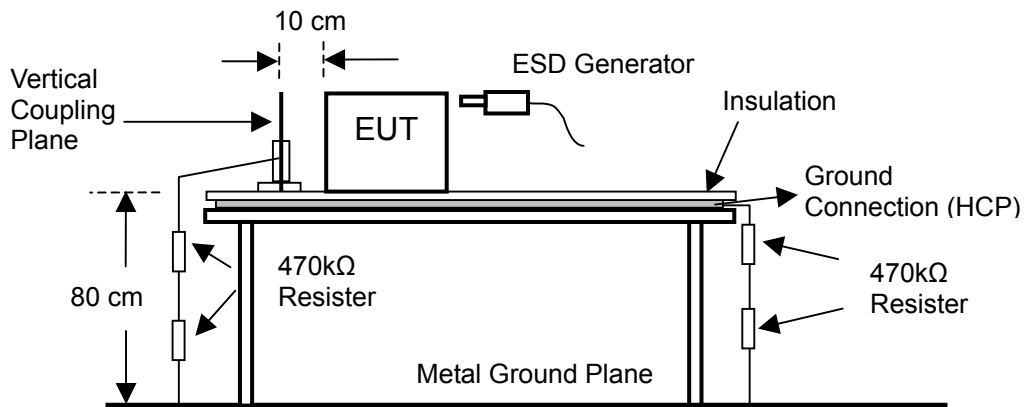

8.3 Test Levels

Level	Contact discharge (kV)	Air discharge (kV)
1	2	2
2	4	4
3	6	8
4	8	15
X	Special	Special

8.4 Test Requirement

8.4.1 IEC 61000-4-2 (EN 55024) require:

- Air discharge: ± 8 kV
- Contact discharge: ± 4 kV
- Indirect discharge: ± 4 kV
- Performance criterion: B

8.4.2 IEC 61000-4-2 (EN 61000-6-1) require:

- Air discharge: ± 8 kV
- Contact discharge: ± 4 kV
- Indirect discharge: ± 4 kV
- Performance criterion: B

8.5 Configuration of Measurement

- 8.5.1 Static electricity discharges shall be applied only to those points and surfaces of the EUT which are expected to be touched during usual operation, including user access, as specified in the user manual, for example for ribbon and paper roll changes.
- 8.5.2 The discharges shall be applied in two ways:
- a) Contact discharges to the conductive surfaces and to coupling planes:
The EUT shall be exposed to at least 200 discharges, 100 each at negative and positive polarity, at a minimum of four test points (a minimum of 50 discharges at each point). One of the test points shall be subjected to at least 50 indirect discharges (contact) to the center of the front edge of the horizontal coupling plane (HCP), the remaining three test points shall each receive at least 50 direct contact discharges. If no direct contact test points are available, then at least 200 indirect discharges shall be applied in the indirect mode (see IEC 61000-4-2 for use of the Vertical Conducting Plane (VCP)). Tests shall be performed at a maximum repetition rate of one discharge per second.
 - b) Air discharge at slots and apertures, and insulating surfaces:
On those parts of the EUT where it is not possible to perform contact discharge testing, the equipment should be investigated to identify user accessible points where breakdown may occur; examples are openings at edges of keys, or in the covers of keyboards and telephone handsets. Such points are tested using the air discharge method. See also IEC 61000-4-2 regarding painted surfaces. This investigation should be restricted to those areas normally handled by the user. A minimum of 10 single air discharges shall be applied to the selected test point for each such area.
- 8.5.3 The ESD generator (gun) was held perpendicular to the surface to which the discharge was applied. The application of electrostatic discharges to the contacts of open connectors is not required.

8.6 Test Result

Temperature: 25.9 °C ; Humidity: 50 % ; Atm pres: 101 Kpa ; Test Engineer: Elli

PASS.

The performance criterion after tested EN 55024 & EN 61000-6-1:

Mode 1: Working Mode (AC to DC Adapter)

Air discharge ±2 kV, ±4 kV, ±8 kV: A B C

Contact discharge ±2 kV, ±4 kV: A B C

Indirect discharge (HCP) ±2 kV, ±4 kV: A B C

Indirect discharge (VCP Front, Left, Back, Right) ±2 kV, ±4 kV:
 A B C

Mode 2: Working Mode (PoE Adapter)

Air discharge ±2 kV, ±4 kV, ±8 kV: A B C

Contact discharge ±2 kV, ±4 kV: A B C

Indirect discharge (HCP) ±2 kV, ±4 kV: A B C

Indirect discharge (VCP Front, Left, Back, Right) ±2 kV, ±4 kV:
 A B C


9 Radio-frequency, Electromagnetic field Immunity Test (IEC 61000-4-3)

9.1 Instrument

Instrument	Manufacturer	Model	Serial No.	Next Cal. Date
Signal Generator	R&S	SM300	101279	2010/10/14
RF Power Amplifier	Frankonia	FLG-200B	1038	2011/02/21
RF Power Amplifier	Frankonia	FLG-50C	1013	2011/02/21
Bilog Antenna	Frankonia	BTA-M	06012M	2011/02/21

Note: The above equipments are within the valid calibration period.

9.2 Block Diagram of Test Configuration

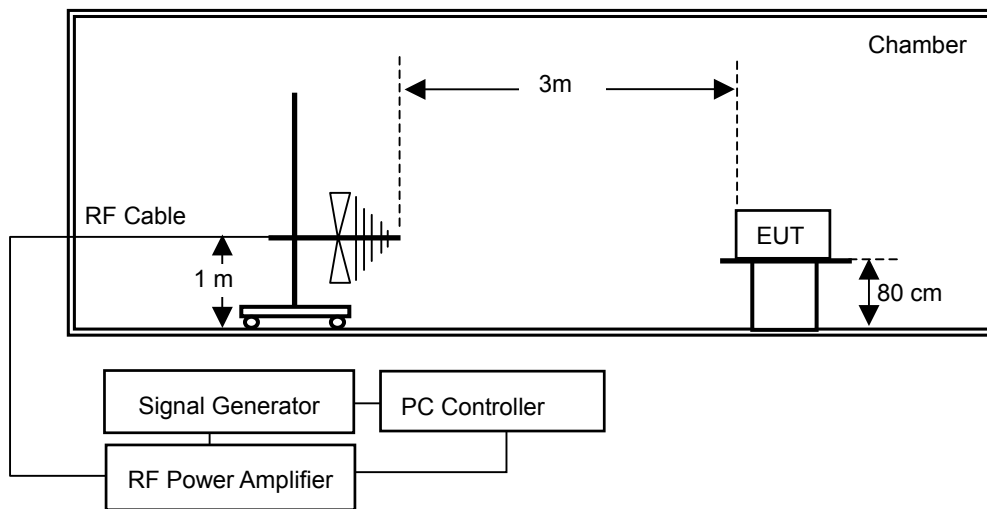

9.3 Test Levels

Level	Test field strength (V/m)
1	1
2	3
3	10
4	30
X	Special

9.4 Test Requirement

9.4.1 IEC 61000-4-3 (EN 55024) require:

The frequency steps: 1%, Log sweep, Dwell time: 3.0 sec.

Frequency range: 80 to 1000 MHz, Field strength: 3 V/m, 80%AM (1kHz),

Performance criterion: A

9.4.2 IEC 61000-4-3 (EN 61000-6-1) require:

The frequency steps: 1%, Log sweep, Dwell time: 3.0 sec.

Frequency range: 80 to 1000 MHz, Field strength: 3 V/m, 80% AM (1kHz),

Frequency range: 1400 to 2000 MHz, Field strength: 3 V/m, 80% AM (1kHz),

Frequency range: 2000 to 2700 MHz, Field strength: 1 V/m, 80% AM (1kHz),

Performance criterion: A

9.5 Configuration of Measurement

9.5.1 Before testing, the intensity of the established field strength was checked by placing the field sensor at a calibration grid point, and with the field generating antenna and cables in the same positions as used for the calibration, the forward and reverse power were measured. The forward power needed to give the calibrated field was evaluated.

9.5.2 The EUT was placed on a non-metallic table 0.8m above the reference ground plane (RGP) and was operated according to its specified operating mode.

9.5.3 Ferrite tiles/ absorbers were placed on the RGP between the EUT and the antenna to reduce the reflections from the RGP.

9.5.4 The distance between antenna and EUT is 3 meter.

9.5.5 During the test EUT performance has been monitoring by CCD camera.

9.6 Test Result

Temperature: 24.6 °C ; Humidity: 48 % ; Atm pres: 101 Kpa ; Test Engineer: Elli

PASS.

The performance criterion after tested EN 55024 & EN 61000-6-1:

Mode 1: Working Mode (AC to DC Adapter)

Frequency range: 80 to 1000 MHz, Field strength: 3 V/m, 80% AM (1kHz),

Performance criterion: A B C

Frequency range: 1400 to 2000 MHz, Field strength: 3 V/m, 80% AM (1kHz),

Performance criterion: A B C

Frequency range: 2000 to 2700 MHz, Field strength: 1 V/m, 80% AM (1kHz),

Performance criterion: A B C

Mode 2: Working Mode (PoE Adapter)

Frequency range: 80 to 1000 MHz, Field strength: 3 V/m, 80% AM (1kHz),

Performance criterion: A B C

Frequency range: 1400 to 2000 MHz, Field strength: 3 V/m, 80% AM (1kHz),

Performance criterion: A B C

Frequency range: 2000 to 2700 MHz, Field strength: 1 V/m, 80% AM (1kHz),

Performance criterion: A B C

10 Electrical Fast Transients Immunity Test (IEC 61000-4-4)


10.1 Instrument

Instrument	Manufacturer	Model	Serial No.	Next Cal. Date
EMC Pro System	KeyTek	EMC Pro	0003231	2011/04/07
Injection Clamp	KeyTek	PRO-CCL-C	0003198	N. C. R.


Note: The above equipments are within the valid calibration period.

10.2 Block Diagram of Test Configuration

For Power Ports.

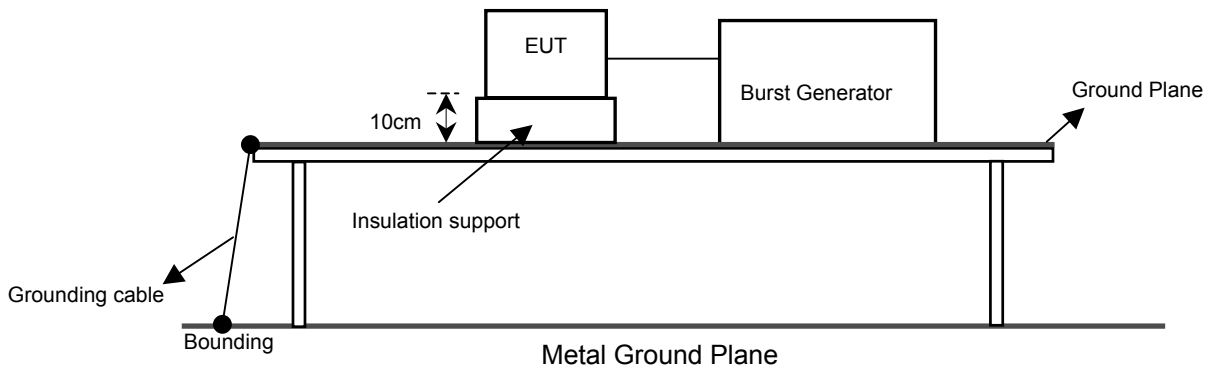

For Signal Ports.

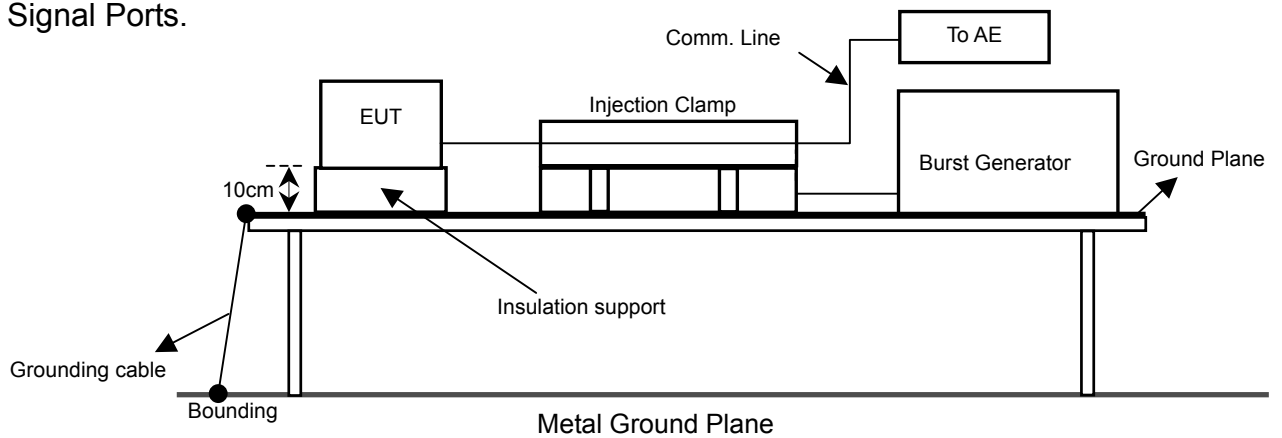

10.3 Test Levels

Open circuit output test voltage and repetition rate of the impulses				
Level	On power port, PE		On I/O (input/output) signal, data and control ports	
	Voltage peak kV	Repetition rate kHz	Voltage peak kV	Repetition rate kHz
1	0,5	5 or 100	0,25	5 or 100
2	1	5 or 100	0,5	5 or 100
3	2	5 or 100	1	5 or 100
4	4	5 or 100	2	5 or 100
X ^a	Special	Special	Special	Special

NOTE 1: Use of 5 kHz repetition rates is traditional; however, 100 kHz is closer to reality. Product committees should determine which frequencies are relevant for specific products or product types.

NOTE 2: With some products, there may be no clear distinction between power ports and I/O ports, in which case it is up to product committees to make this determination for test purposes.

^a “X” is an open level. The level has to be specified in the dedicated equipment specification.

10.4 Test Requirement

10.4.1 IEC 61000-4-4 (EN 55024) require:

5 kHz Repetition frequency

- ±1.0 kV input AC power ports.
- ±0.5 kV input DC power ports.
- ±0.5 kV Signal and Telecommunication ports.

Performance criterion: B

10.4.2 IEC 61000-4-4 (EN 61000-6-1) require:

5 kHz Repetition frequency

- ±1.0 kV input AC power ports.
- ±1.0 kV output AC power ports.
- ±0.5 kV input DC power ports.
- ±0.5 kV Signal ports.

Performance criterion: B

10.5 Configuration of Measurement

10.5.1 The EUT and the auxiliary equipment were placed on a wooden table of 0.8 meters height. The size of ground plane is greater than 1m×1m and project beyond the EUT by at least 0.1m on all sides. The ground plane is connected to the protective earth.

10.5.2 The EUT was connected to the power mains through a coupling device that directly couples the EFT interference signal. Each of the Line, Neutral and Protective Earth (PE) conductors was impressed with burst noise for 1 minute. Both the voltage polarities were applied for each test level. The length of power cord between the coupling device and the EUT was less than 1 meter.

10.6 Test Result

Temperature: 26.9 °C ; Humidity: 52 % ; Atm pres: 101 Kpa ; Test Engineer: Elli

PASS.

The performance criterion after tested EN 55024 & EN 61000-6-1:

Mode 1: Working Mode (AC to DC Adapter)

±1.0 kV input AC power port: Line + Neutral + PE

Performance criterion: A B C

±0.5 kV for Signal and Telecommunication port: RJ45

Performance criterion: A B C

Mode 2: Working Mode (PoE Adapter)

±1.0 kV input AC power port: Line + Neutral + PE

Performance criterion: A B C

±0.5 kV for Signal and Telecommunication port: RJ45

Performance criterion: A B C


11 Surges Immunity Test (IEC 61000-4-5)

11.1 Instrument

Instrument	Manufacturer	Model	Serial No.	Next Cal. Date
EMC Pro Systems	KeyTek	EMC Pro	0003234	2011/03/16

Note: The above equipments are within the valid calibration period.

11.2 Block Diagram of Test Configuration

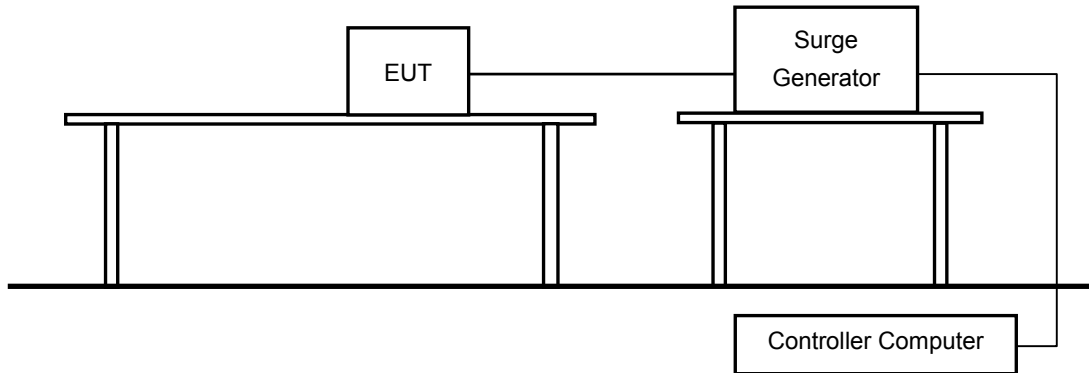

11.3 Test Levels

Level	Open-circuit test voltage $\pm 10\%$ (kV)
1	0.5
2	1.0
3	2.0
4	4.0
X	Special

Note: X can be any level, above, below or in between the other levels. This level can be specified in the product standard.

11.4 Test Requirement

11.4.1 IEC 61000-4-5 (EN 55024) require:

- Input AC power ports:
 - Line to line: $\pm 1\text{kV}$ (peak), 1.2/50 (8/20) Tr/Th us
 - Line to earth (ground): $\pm 2\text{kV}$ (peak), 1.2/50 (8/20) Tr/Th us
- Input DC power ports: $\pm 0.5\text{kV}$ (peak): line to earth, 1.2/50 (8/20) Tr/Th us
- Signal ports: $\pm 1.0\text{kV}$ (peak): 1.2/50 (8/20) Tr/Th us
- Telecommunication ports: $\pm 1.0\text{kV}$ (peak): 1.2/50 (8/20) Tr/Th us

Performance criterion: **B**

11.4.2 IEC 61000-4-5 (EN 61000-6-1) require:

- Input AC power ports:
 - Line to line: $\pm 1\text{kV}$ (peak), 1.2/50 (8/20) Tr/Th us
 - Line to earth (ground): $\pm 2\text{kV}$ (peak), 1.2/50 (8/20) Tr/Th us
- Output AC power ports:
 - Line to line: $\pm 1\text{kV}$ (peak), 1.2/50 (8/20) Tr/Th us
 - Line to earth (ground): $\pm 2\text{kV}$ (peak), 1.2/50 (8/20) Tr/Th us
- Input DC power ports:
 - Line to line: $\pm 0.5\text{kV}$ (peak), 1.2/50 (8/20) Tr/Th us
 - Line to earth (ground): $\pm 0.5\text{kV}$ (peak), 1.2/50 (8/20) Tr/Th us

Performance criterion: **B**

11.5 Configuration of Measurement

- 11.5.1 The EUT and support units were located on a wooden table 0.8m away from ground floor.
- 11.5.2 The EUT was connected to the power mains through a coupling device that directly couples the Surge interference signal. The surge noise was applied synchronized to the voltage phase at the zero crossing and the peak value of the AC voltage wave (positive and negative).
- 11.5.3 The surges were applied line to line and line(s) to earth. When testing line to earth the test voltage was applied successively between each of the lines and earth. Steps up to the test level specified increased the test voltage. All lower levels including the selected test level were tested. The polarity of each surge level included positive and negative test pulses.

11.6 Test Result

Temperature: 25.0 °C ; Humidity: 51 % ; Atm pres: 101 Kpa ; Test Engineer: Elli

PASS.

The performance criterion after tested EN 55024 & EN 61000-6-1:

Mode 1: Working Mode (AC to DC Adapter)

- ±0.5 kV (peak) Input AC power port: Line to line
Performance criterion: A B C
- ±1.0 kV (peak) Input AC power port: Line to line
Performance criterion: A B C
- ±0.5 kV (peak) Input AC power port: Line to earth (ground)
Performance criterion: A B C
- ±1.0 kV (peak) Input AC power port: Line to earth (ground)
Performance criterion: A B C
- ±2.0 kV (peak) Input AC power port: Line to earth (ground)
Performance criterion: A B C

Mode 2: Working Mode (PoE Adapter)

- ±0.5 kV (peak) Input AC power port: Line to line
Performance criterion: A B C
- ±1.0 kV (peak) Input AC power port: Line to line
Performance criterion: A B C
- ±0.5 kV (peak) Input AC power port: Line to earth (ground)
Performance criterion: A B C
- ±1.0 kV (peak) Input AC power port: Line to earth (ground)
Performance criterion: A B C
- ±2.0 kV (peak) Input AC power port: Line to earth (ground)
Performance criterion: A B C

12 Radio-frequency, Conducted Disturbances Immunity Test (IEC 61000-4-6)


12.1 Instrument

Instrument	Manufacturer	Model	Serial No.	Next Cal. Date
Signal Generator	R&S	SMY02	829846/013	2010/07/20
Power Amplifier	Frankonia	CIT-10	162D1278	2011/02/11
Attenuator	SCHAFFNER	ATN6075	22300	2011/02/11
C.D.N	FCC	FCC-801-M3-25A	2045	2011/02/11
C.D.N	SCHAFFNER	M216	16394	2011/02/11
EM Injection Clamp	SCHAFFNER	KEMZ 801	17037	2011/02/11


Note: The above equipments are within the valid calibration period.

12.2 Block Diagram of Test Configuration

For Power Ports.

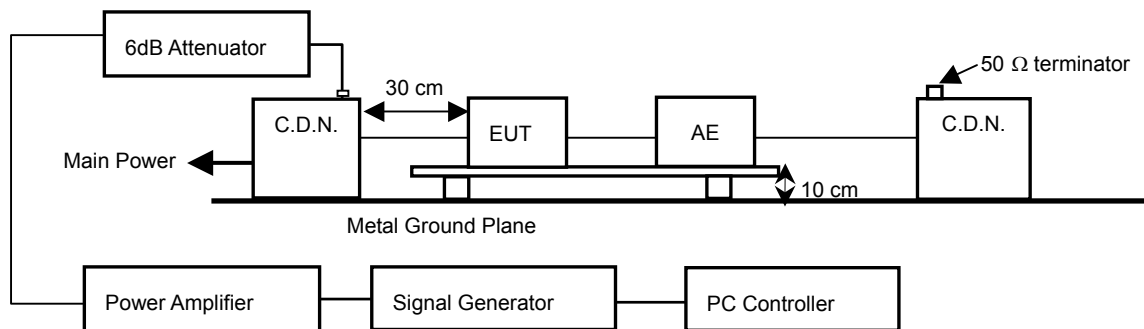

For Signal Ports.

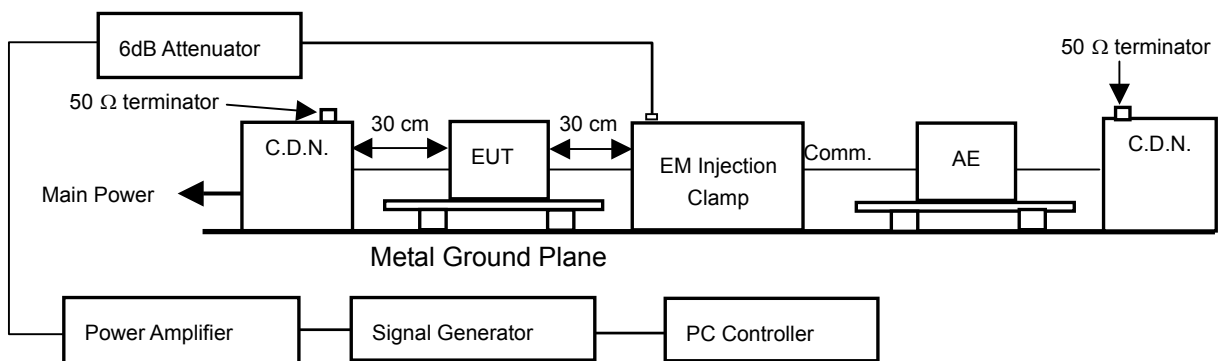

12.3 Test Levels

Level	Voltage Level (V)
1	1
2	3
3	10
X	Special

12.4 Test Requirement

12.4.1 IEC 61000-4-6 (EN 55024) require:

The frequency steps: 1%, Log sweep, Dwell time: 3.0 sec.

Frequency Range is from 0.15 to 80MHz.

Field strength: 3 V, 80% AM (1kHz)

Input AC power ports.

Input DC power ports.

Signal and Telecommunication ports.

Performance criterion: A

12.4.2 IEC 61000-4-6 (EN 61000-6-1) require:

The frequency steps: 1%, Log sweep, Dwell time: 3 sec

Frequency Range is from 0.15 to 80MHz.

Field strength: 3 V, 80% AM (1kHz)

Input AC power ports.

Output AC power ports.

Input DC power ports.

Output DC power ports.

Signal ports.

Performance criterion: A

12.5 Configuration of Measurement

12.5.1 The EUT was placed on a table of is 0.1 m height. In Semi-Anechoic chamber A Ground reference plane was placed on the table and a 0.1 meter insulating support was inserted between the EUT and Ground reference plane.

12.5.2 The EUT was connected to the power mains through a Coupling and Decoupling Networks (CDN).

12.5.3 The test was performed with the test generator connected to each of the coupling and decoupling devices in turn while the other non-excited RF input ports of the coupling devices were terminated by a 50 Ω terminator.

12.5.4 The frequency range was swept from 150kHz to 80MHz.using the signal levels established during the setting process, and without the disturbance signal 80% amplitude modulated with a 1 kHz sine wave, pausing to adjust the RF signal level or to switch coupling devices as necessary. The rate of sweep was less than 1.5×10^{-3} decades/s. And the step size of the frequency sweep was also less than 1% of the start and thereafter 1% of the preceding frequency value. The dwell time at each frequency was more than the time necessary for the EUT to be excited, and able to respond.

12.5.5 The EUT was fully excised during the testing and all the selected excise modes were fully interrogated for susceptibility.

12.6 Test Result

Temperature: 26.1 °C ; Humidity: 54 % ; Atm pres: 101 Kpa ; Test Engineer: Elli

PASS.

The performance criterion after tested EN 55024 & EN 61000-6-1:

Mode 1: Working Mode (AC to DC Adapter)

Frequency range: 0.15 to 80 MHz, Field strength: 3 V, 80% AM (1kHz),

Input AC power ports

Performance criterion: A B C

Signal and Telecommunication ports

Performance criterion: A B C

Mode 2: Working Mode (PoE Adapter)

Frequency range: 0.15 to 80 MHz, Field strength: 3 V, 80% AM (1kHz),

Input AC power ports

Performance criterion: A B C

Signal and Telecommunication ports

Performance criterion: A B C


13 Power Frequency Magnetic Field Immunity Test (IEC 61000-4-8)

13.1 Instrument

Instrument	Manufacturer	Model	Serial No.	Next Cal. Date
Magnetic field generator	PMM	PMM1008	0000J00301	2010/09/04

Note: The above equipments are within the valid calibration period.

13.2 Block Diagram of Test Configuration

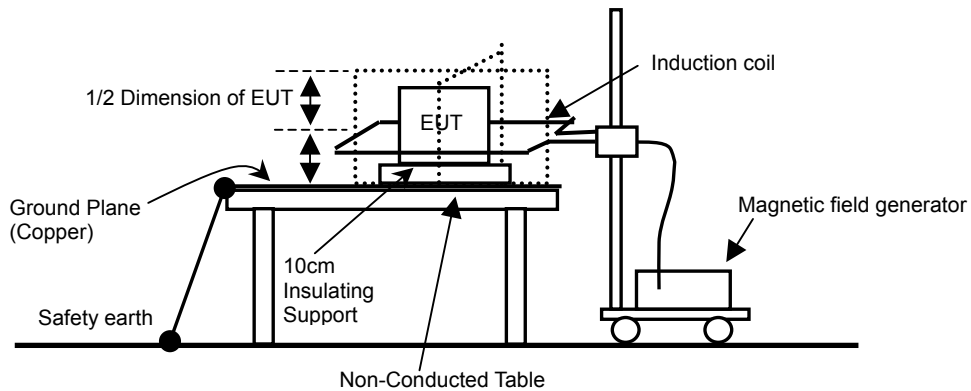

13.3 Test Levels

Level	Magnetic field strength (A/m)
1	1
2	3
3	10
4	30
5	100
X	Special

13.4 Test Requirement

13.4.1 IEC 61000-4-8 (EN 55024) require:

- Power Frequency is 50Hz.
- Magnetic field strength: **1A/m**
- Performance criterion: **A**

13.4.2 IEC 61000-4-8 (EN 61000-6-1) require:

- Power Frequency is 50 or 60Hz.
- Magnetic field strength: **3A/m**
- Performance criterion: **A**

13.5 Configuration of Measurement

- 13.5.1 The equipment is configured and connected to satisfy its functional requirements. It shall be placed on the GRP (1m x 1m) with the interposition of a 0.1m thickness insulating support.
- 13.5.2 All cables shall be exposed to the magnetic field for 1m of their length.
- 13.5.3 Different induction coils may be selected for testing in the different orthogonal directions.
- 13.5.4 Induction coils used in the vertical position (horizontal polarization of the field) can be bonded directly to the ground plane.

13.6 Test Result

Temperature: 24.2 °C ; Humidity: 48 % ; Atm pres: 101 Kpa ; Test Engineer: Elli

PASS.

The performance criterion after tested EN 55024 & EN 61000-6-1:

Mode 1: Working Mode (AC to DC Adapter)

Power Frequency is 50Hz, Magnetic field strength: 3A/m

Performance criterion: A B C

Mode 2: Working Mode (PoE Adapter)

Power Frequency is 50Hz, Magnetic field strength: 3A/m

Performance criterion: A B C


14 Voltage Dips, Short Interruptions Immunity Test (IEC 61000-4-11)

14.1 Instrument

Instrument	Manufacturer	Model	Serial No.	Next Cal. Date
EMC Pro System	KeyTek	EMC Pro	0003231	2011/04/07

Note: The above equipments are within the valid calibration period.

14.2 Block Diagram of Test Configuration

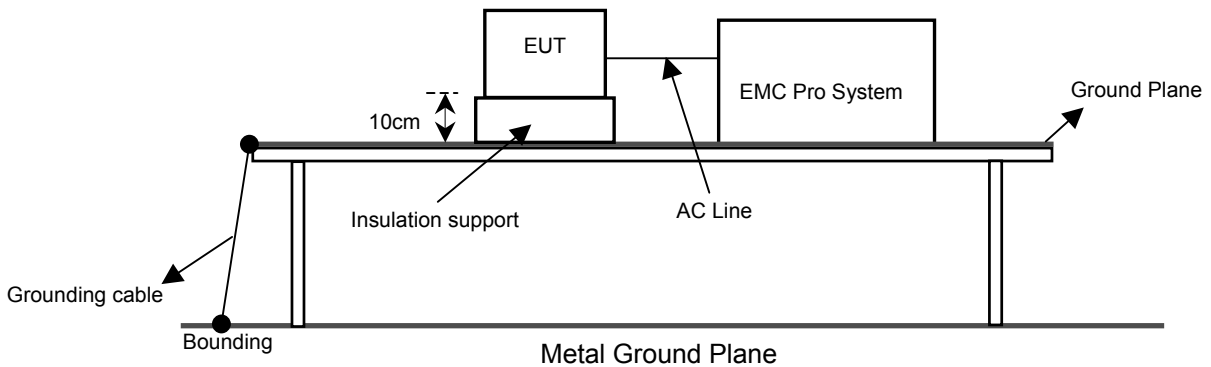

14.3 Test Levels

Preferred test level and durations for voltage dips

Class ^a	Test level and durations for short interruptions (t_s) (50 Hz/60 Hz)				
Class 1	Case-by-case according to the equipment requirements				
Class 2	0 % during 1/2 cycle	0 % during 1 cycle	70 % during 25/30 ^c cycles		
Class 3	0 % during 1/2 cycle	0 % during 1 cycle	40 % during 10/12 ^c cycles	70 % during 25/30 ^c cycles	80 % during 250/300 ^c cycles
Class X ^b	X	X	X	X	X

^a Classes as per IEC 61000-2-4; see Annex B.

^b To be defined by product committee. For equipment connected directly or indirectly to the public network, the levels must not be less severe than Class 2.

^c "25/30 cycles" means "25 cycles for 50 Hz test" and "30 cycles for 60 Hz test".

Preferred test level and durations for short interruptions

Class ^a	Test level and durations for short interruptions (t_s) (50 Hz/60 Hz)
Class 1	Case-by-case according to the equipment requirements
Class 2	0 % during 250/300 ^c cycles
Class 3	0 % during 250/300 ^c cycles
Class X ^b	X

^a Classes as per IEC 61000-2-4; see Annex B.

^b To be defined by product committee. For equipment connected directly or indirectly to the public network, the levels must not be less severe than Class 2.

^c "250/300 cycles" means "250 cycles for 50 Hz test" and "300 cycles for 60 Hz test".

14.4 Test Requirement

14.4.1 IEC 61000-4-11 (EN 55024) require:

- > 95% reduction (Voltage Dips), 0.5 period, Performance criterion: B
- 30% reduction (Voltage Dips), 25 period, Performance criterion: C
- > 95% reduction (Voltage Interruptions), 250 period, Performance criterion: C

14.4.2 IEC 61000-4-11 (EN 61000-6-1) require:

- 100% reduction (Voltage Dips), 0.5 period, Performance criterion: B
- 100% reduction (Voltage Dips), 1 period, Performance criterion: B
- 30% reduction (Voltage Dips), 25 period, Performance criterion: C
- 100% reduction (Voltage Interruptions), 250 period, Performance criterion: C

14.5 Configuration of Measurement

14.5.1 The power cord was used as supplied by the manufacturer. The EUT was connected to the line output of the Voltage Dips and Interruption Generator.

14.5.2 According to EN 55024, the EUT was tested for (I) > 95% voltage dip of supplied voltage with duration of 0.5 period (10ms), (II) 30% voltage dip of supplied voltage and duration 25 period (500ms). Both of the dip tests were carried out for a sequence of three voltage dips with intervals of 10 seconds. (III) > 95% voltage interruption of supplied voltage with duration of 250 period (5000ms) was followed, which was a sequence of three voltage interruptions with intervals of 10 seconds.

14.5.3 According to EN 61000-6-1, the EUT was tested for (I) 100% voltage dip of supplied voltage with duration of 0.5 period, (II) 100% voltage dip of supplied voltage and duration 1 period, (III) 30% voltage dip of supplied voltage and duration 25 period. All of the dip tests were carried out for a sequence of three voltage dips with intervals of 10 seconds, (VI) 100% voltage interruption of supplied voltage with duration of 250 period was followed, which was a sequence of three voltage interruptions with intervals of 10 seconds.

14.6 Test Result

Temperature: 26.9 °C ; Humidity: 52 % ; Atm pres: 101 Kpa ; Test Engineer: Elli

PASS.

The performance criterion after tested EN 55024 & EN 61000-6-1:

Mode 1: Working Mode (AC to DC Adapter)


- 100% reduction (Voltage Dips), 0.5 period A B C
- 100% reduction (Voltage Dips), 1 period A B C
- 30% reduction (Voltage Dips), 25 period A B C
- 100% reduction (Voltage Interruptions), 250 period A B C

Mode 2: Working Mode (PoE Adapter)


- 100% reduction (Voltage Dips), 0.5 period A B C
- 100% reduction (Voltage Dips), 1 period A B C
- 30% reduction (Voltage Dips), 25 period A B C
- 100% reduction (Voltage Interruptions), 250 period A B C

15 Photographs of Test


15.1 Power Line & Telecommunication Port Conducted Emission Measurement

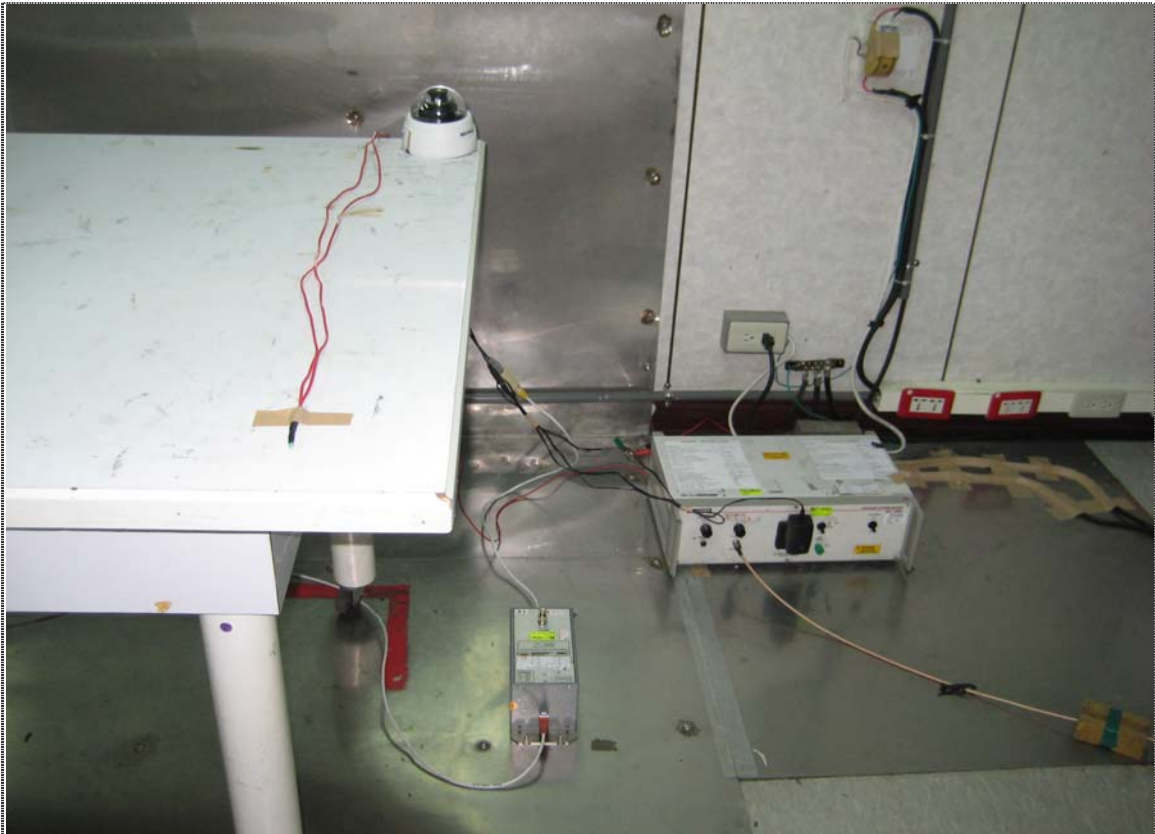

Front View - Mode 1: Working Mode (AC to DC Adapter)

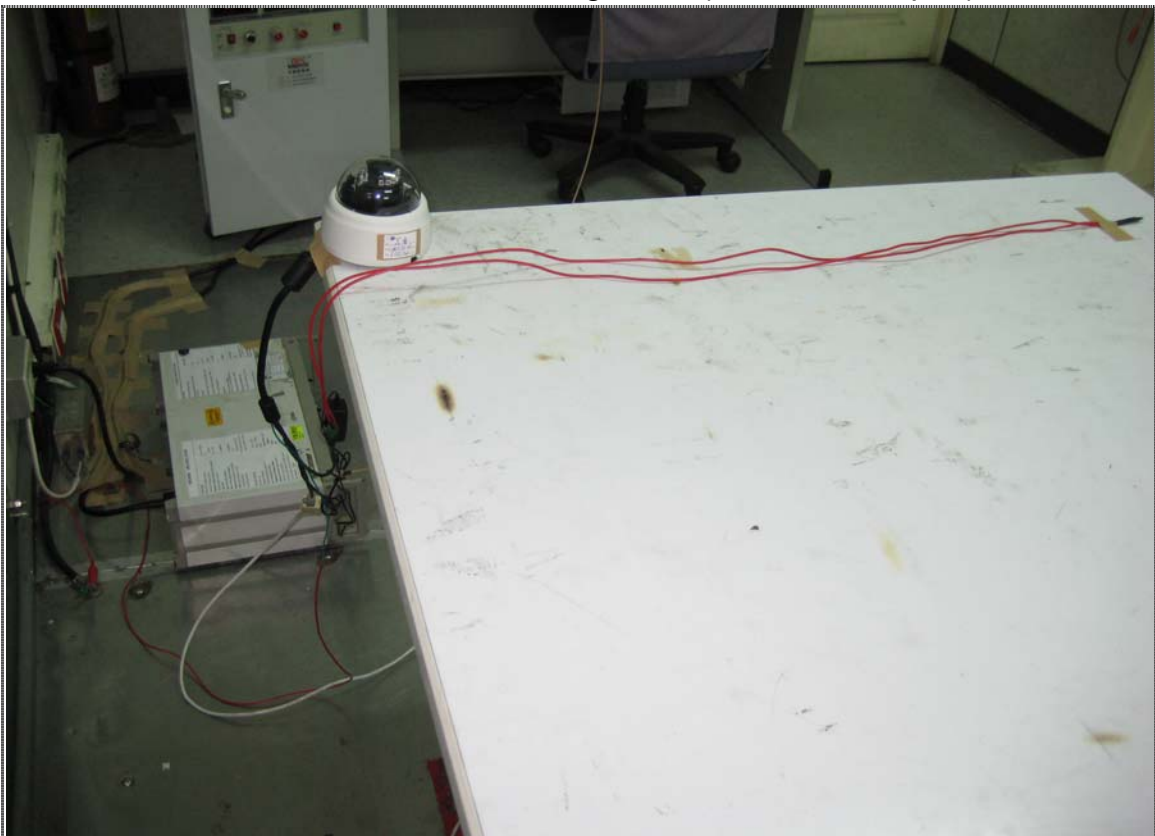

Rear View - Mode 1: Working Mode (AC to DC Adapter)

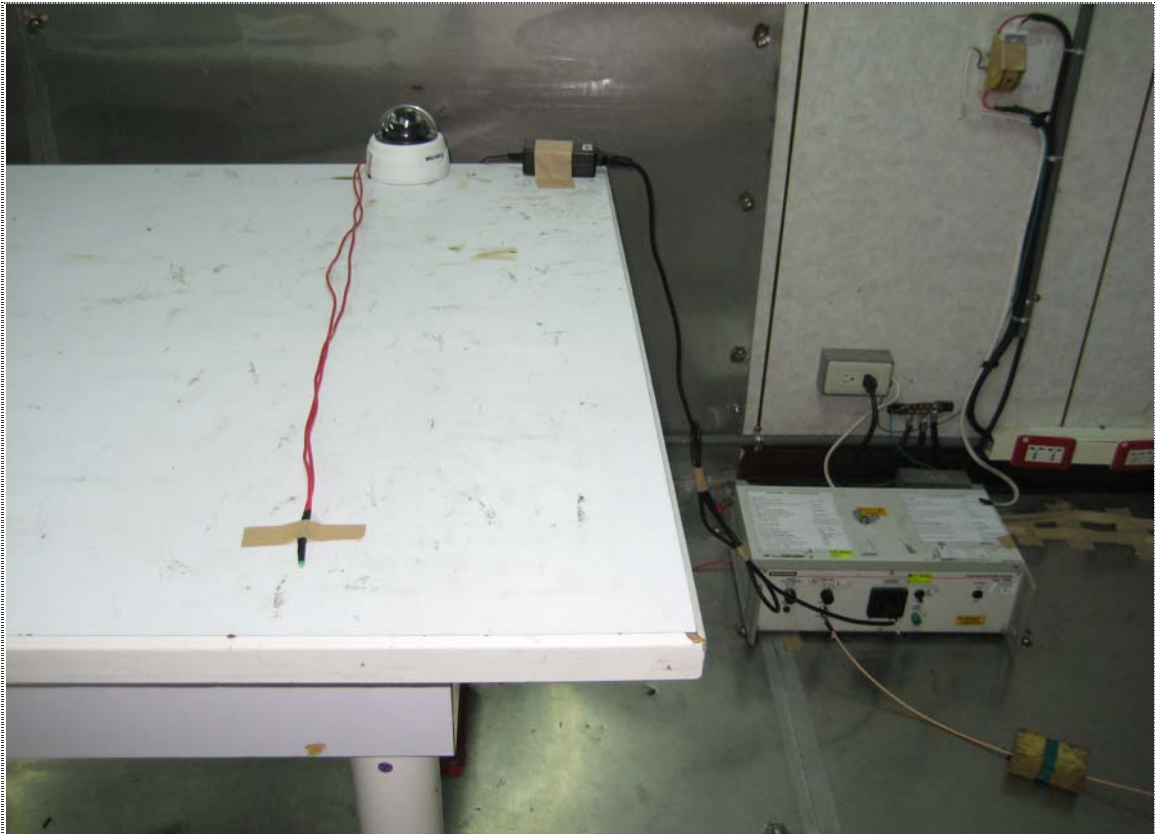

Front View - Mode 2: Working Mode (PoE Adapter)



Rear View - Mode 2: Working Mode (PoE Adapter)

15.2 Radiated Emission Measurement



Front View - Mode 1: Working Mode (AC to DC Adapter)



Rear View - Mode 1: Working Mode (AC to DC Adapter)



Front View - Mode 2: Working Mode (PoE Adapter)




Rear View - Mode 2: Working Mode (PoE Adapter)


15.3 Harmonic Current & Voltage Fluctuations and Flicker Measurement




15.4 Electrostatic Discharges Immunity Test (IEC 61000-4-2)

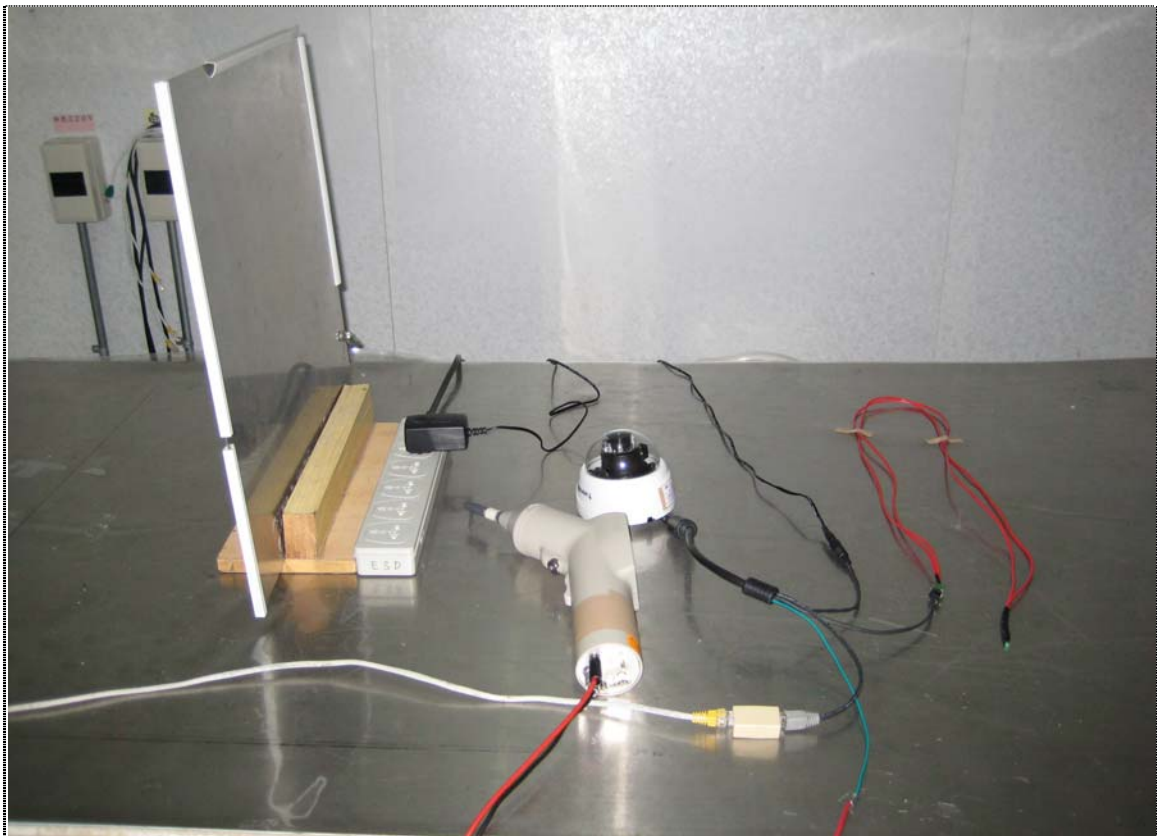

15.5 Radio-frequency, Electromagnetic field Immunity Test (IEC 61000-4-3)

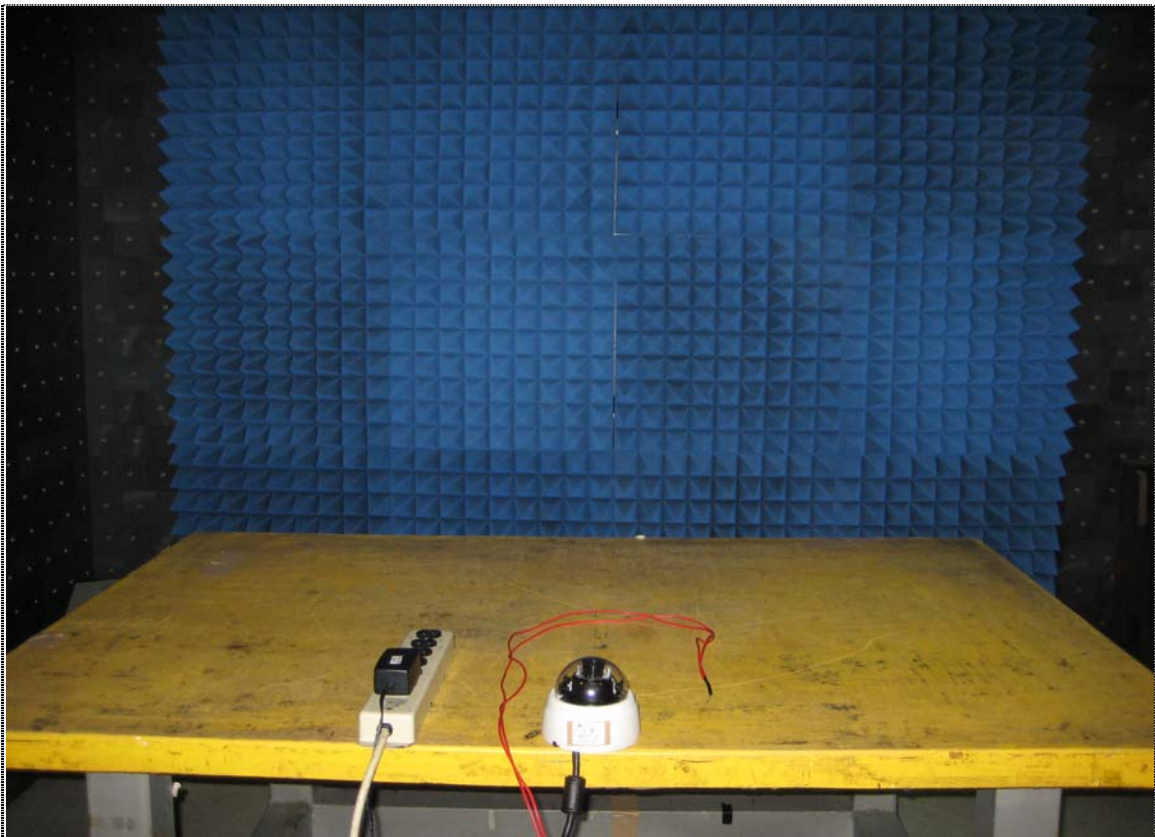


Front View

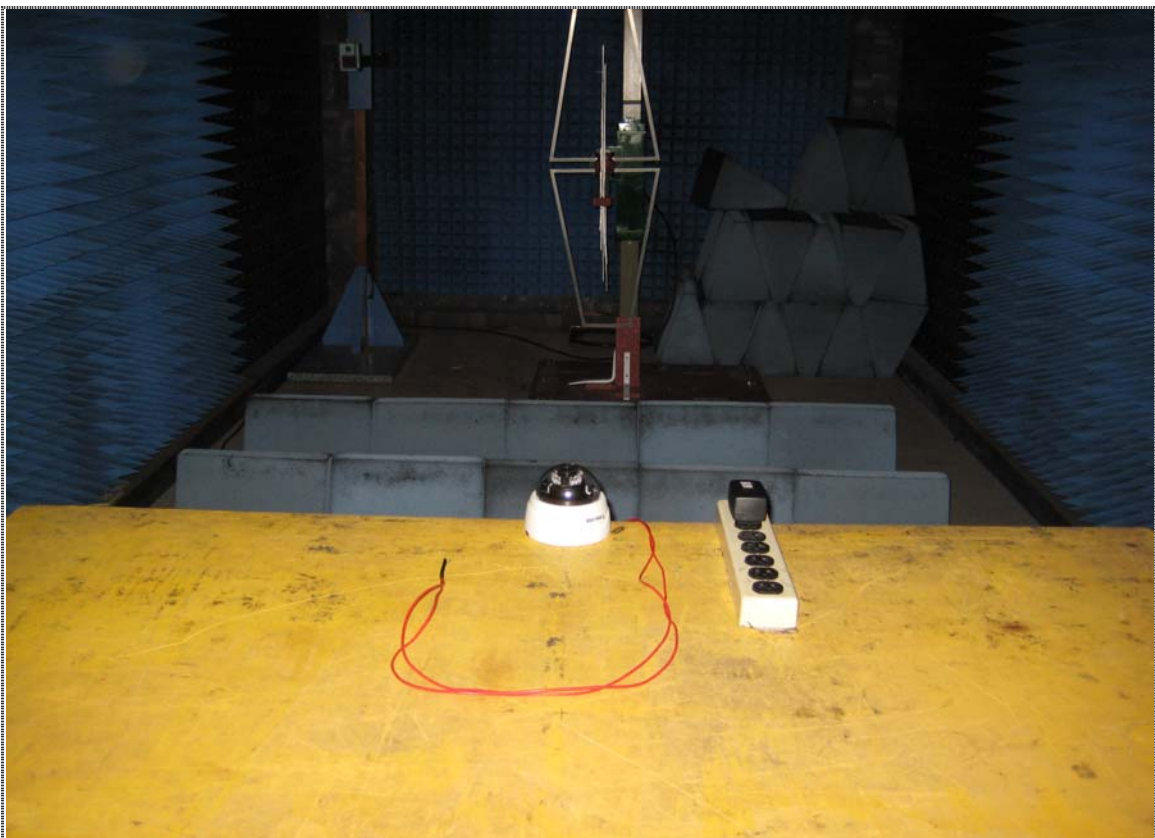

Rear View

15.6 Electrical Fast Transients Immunity Test (IEC 61000-4-4)

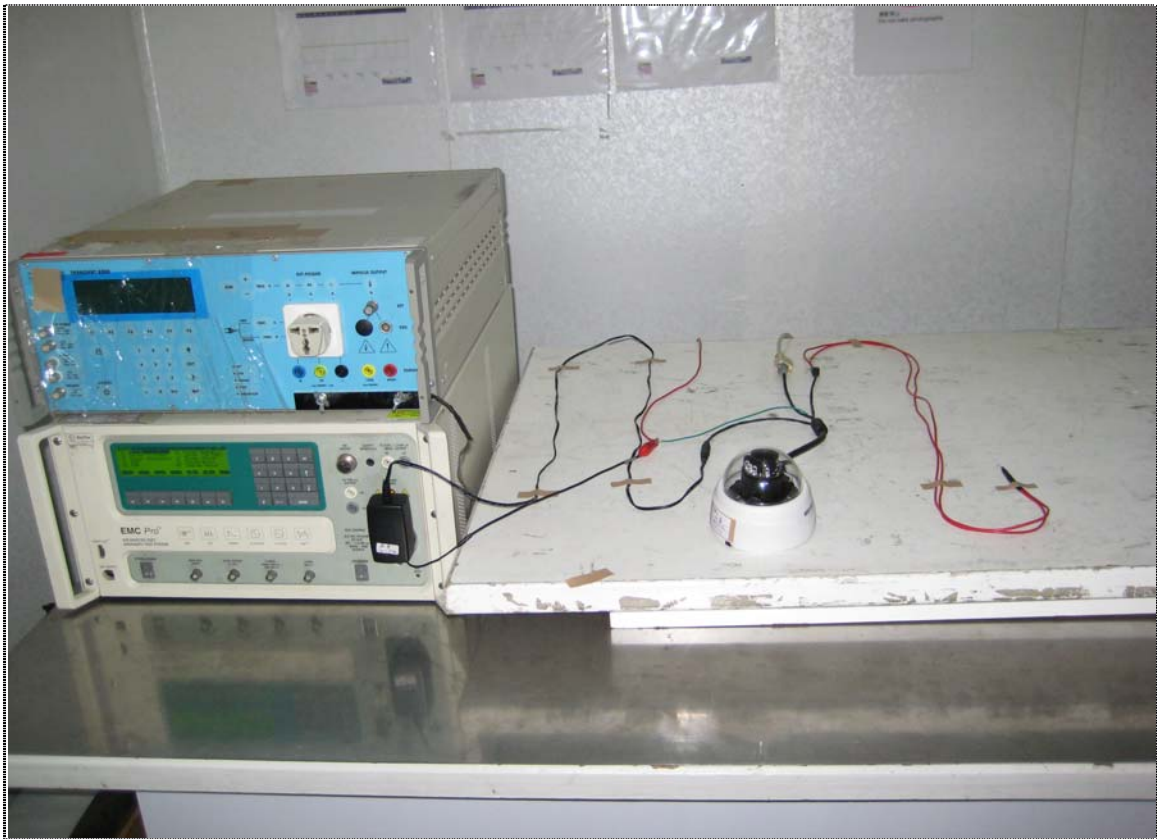


15.7 Surge Immunity Test (IEC 61000-4-5)




15.8 Radio-frequency, Conducted Disturbances Immunity Test (IEC 61000-4-6)



15.9 Power Frequency Magnetic Field Immunity Test (IEC 61000-4-8)

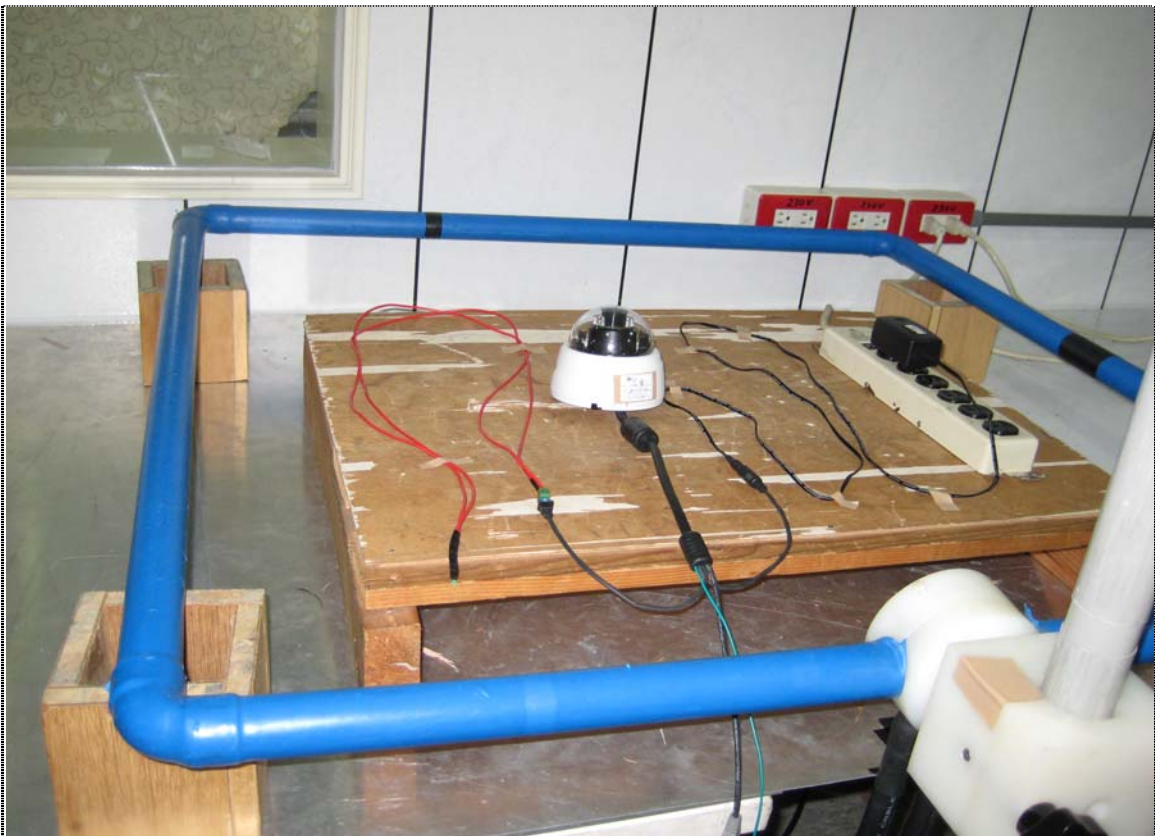

15.10 Voltage Dips, Short Interruptions Immunity Test (IEC 61000-4-11)

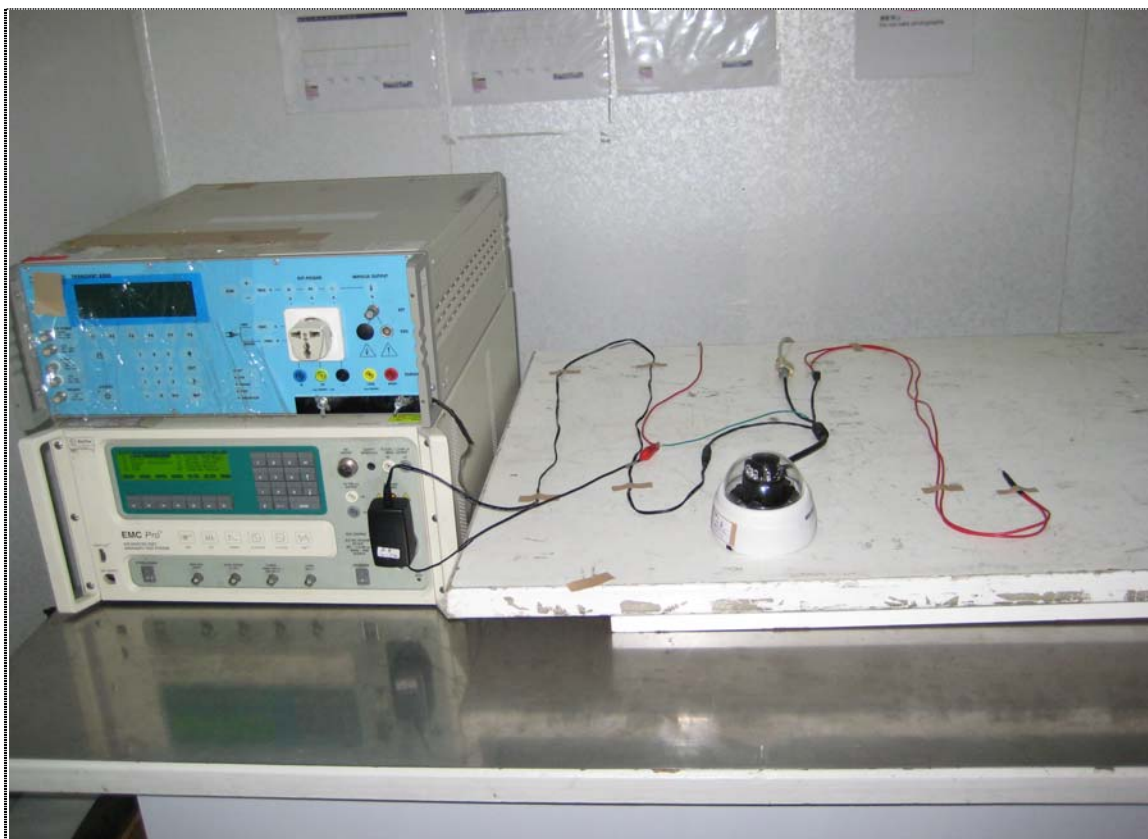

15.11 Electrostatic Discharge Test Point



Discharge Point-1 (blue arrow shows air discharge)



Discharge Point-2 (blue arrow shows air discharge)

16 Photographs of EUT


16.1 Model No.: FD8134




Front View of EUT




Rear View of EUT

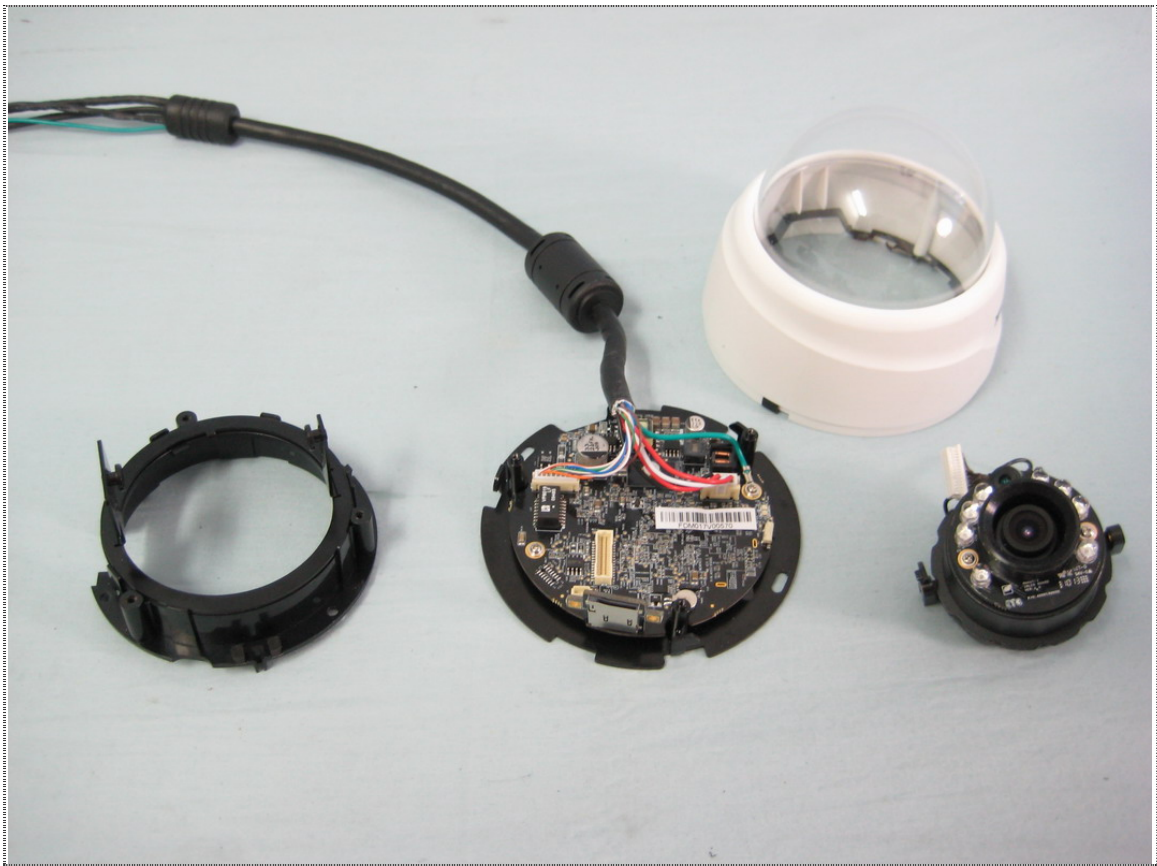


Inner View of EUT-1

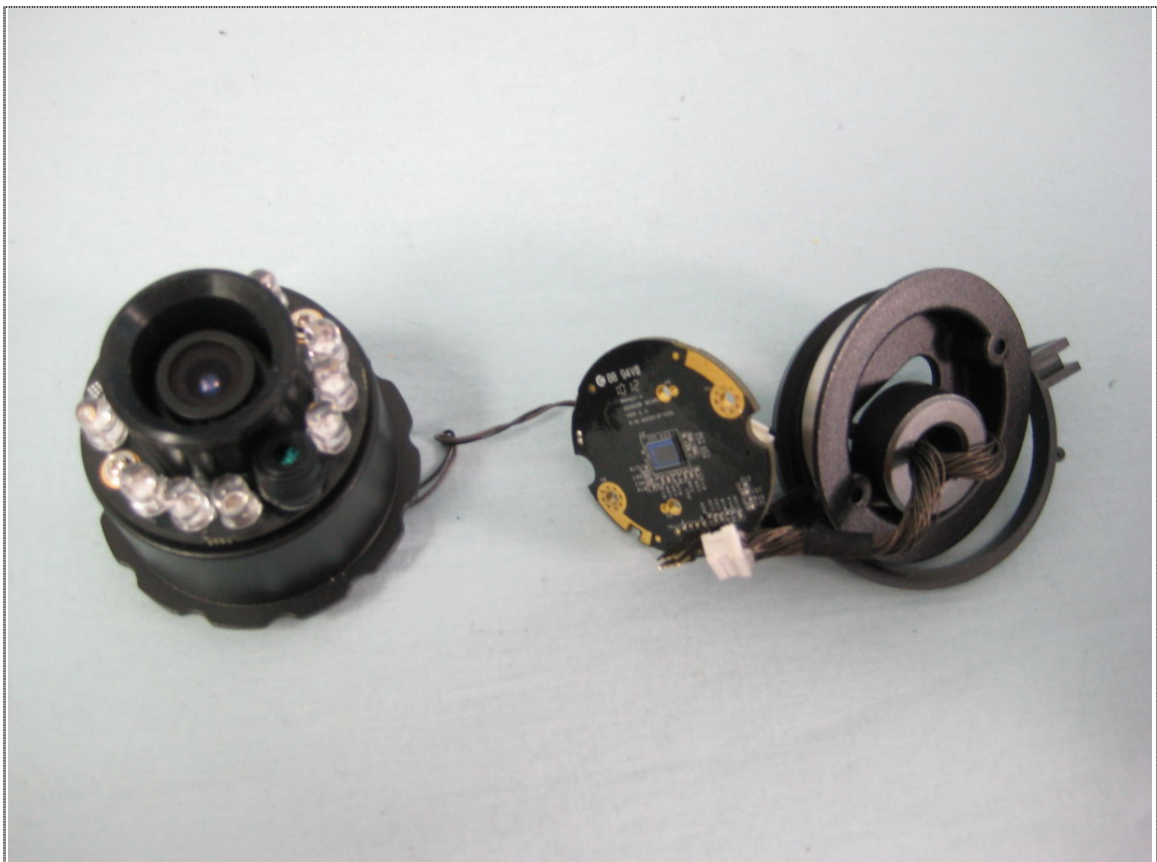


Inner View of EUT-2

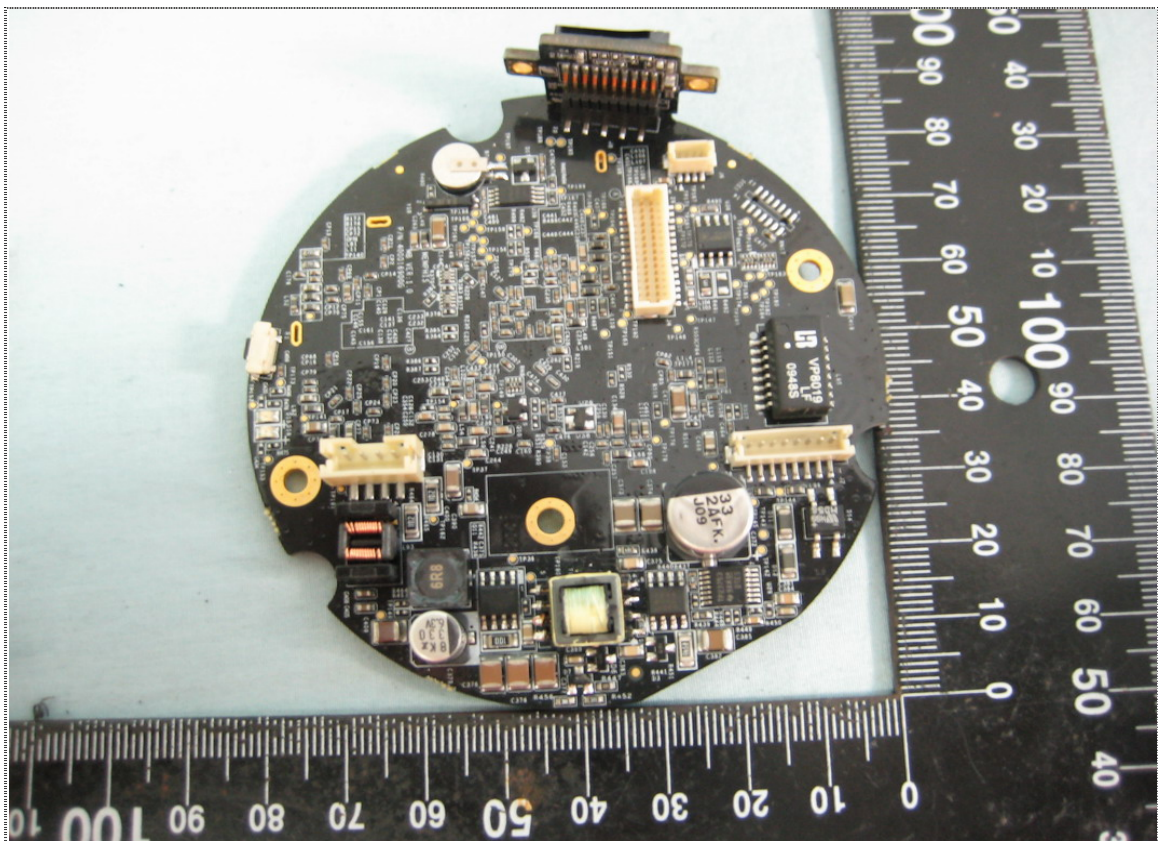


Front View of Main Borad-1

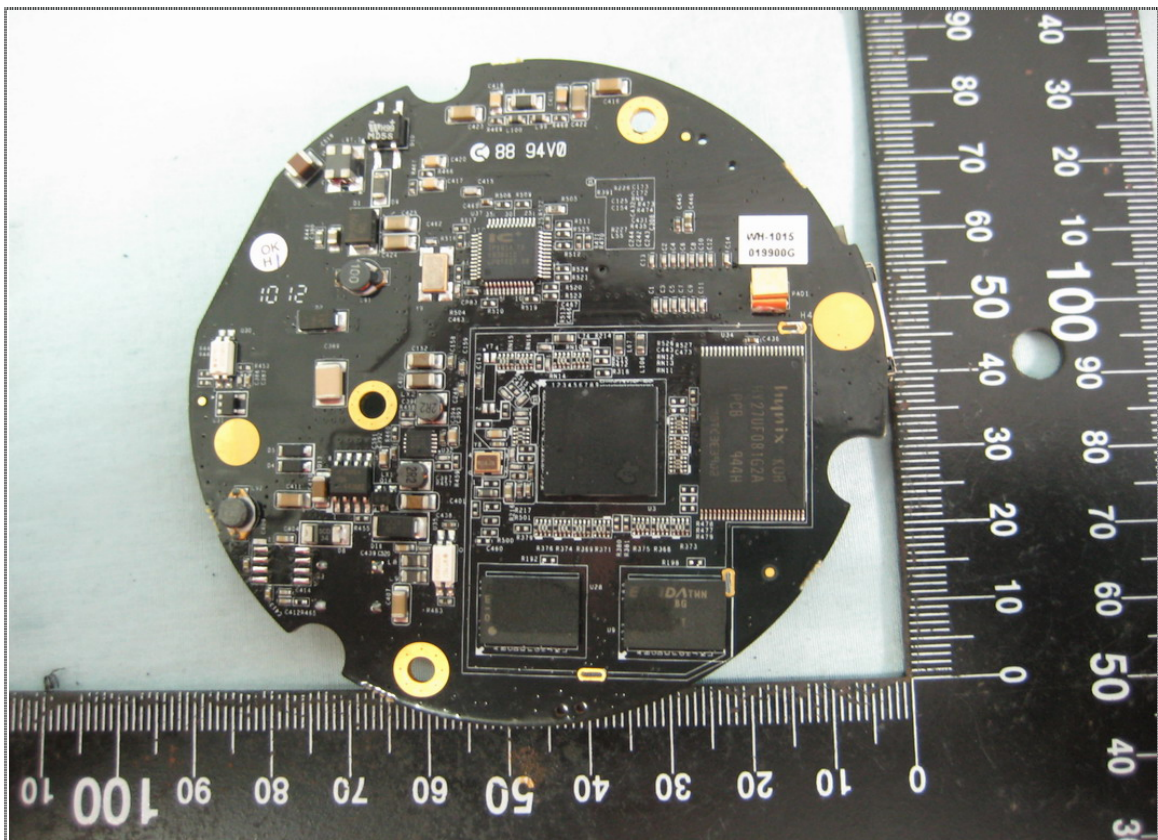


Rear View of Main Borad-1

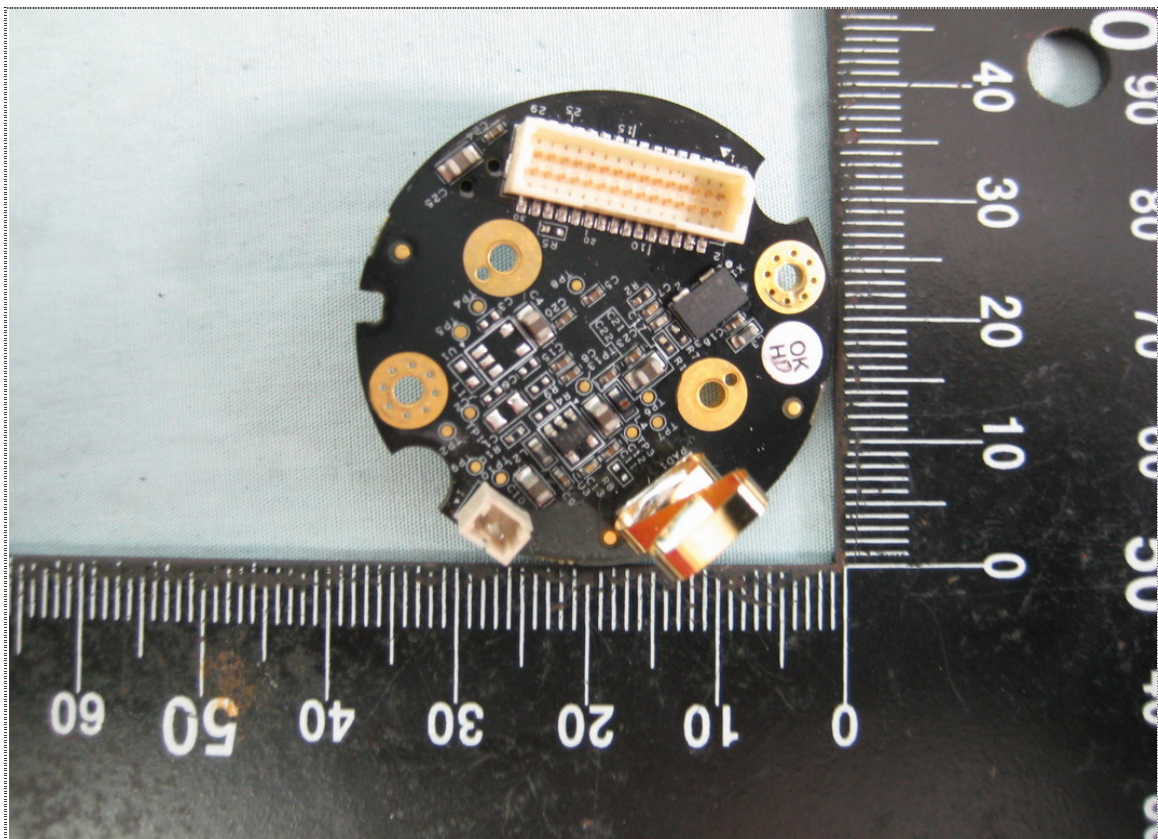


Front View of Main Borad-2

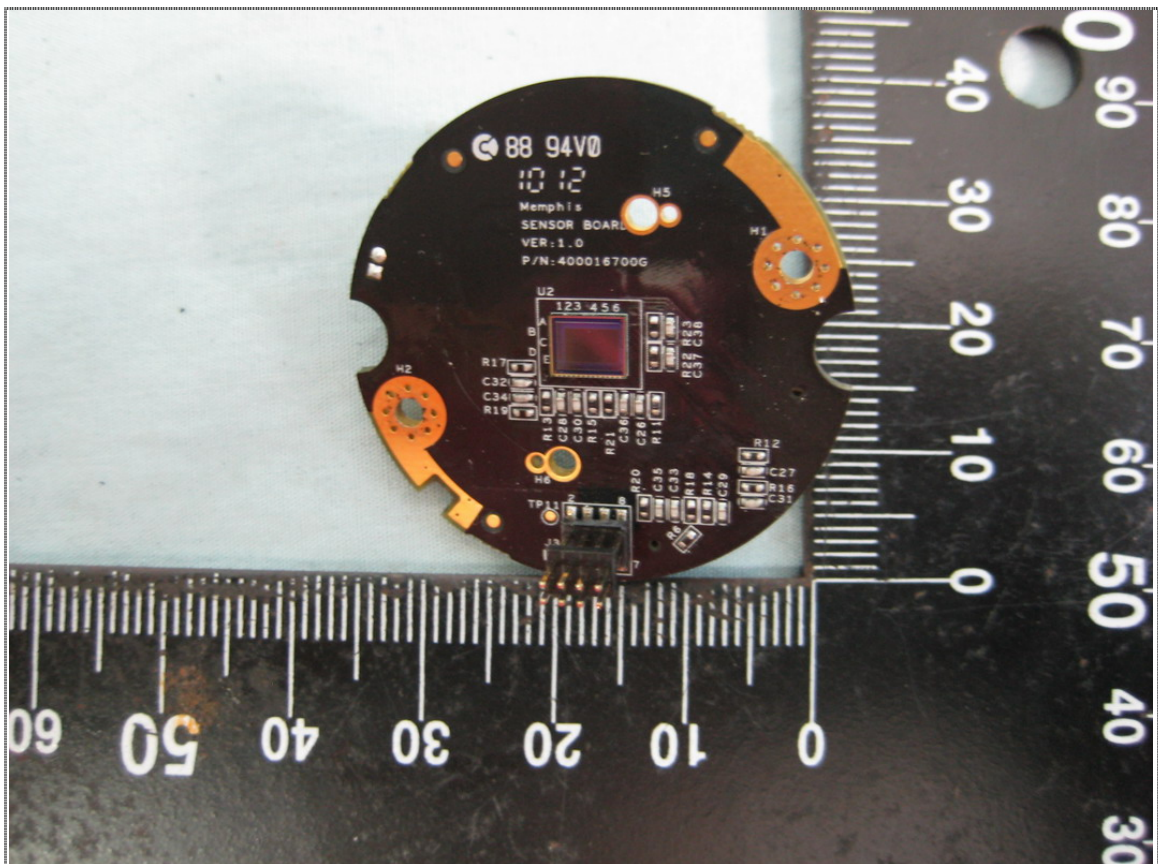


Rear View of Main Borad-2

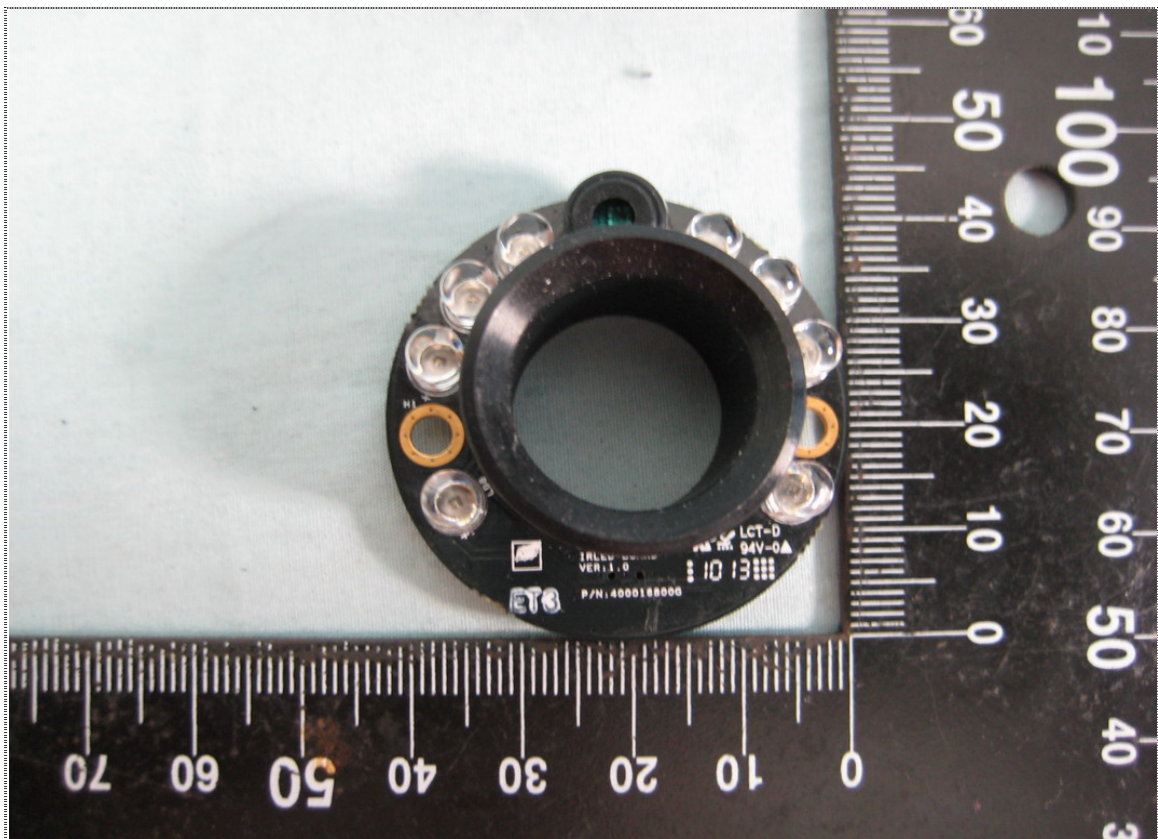

Front View of Main Board-3

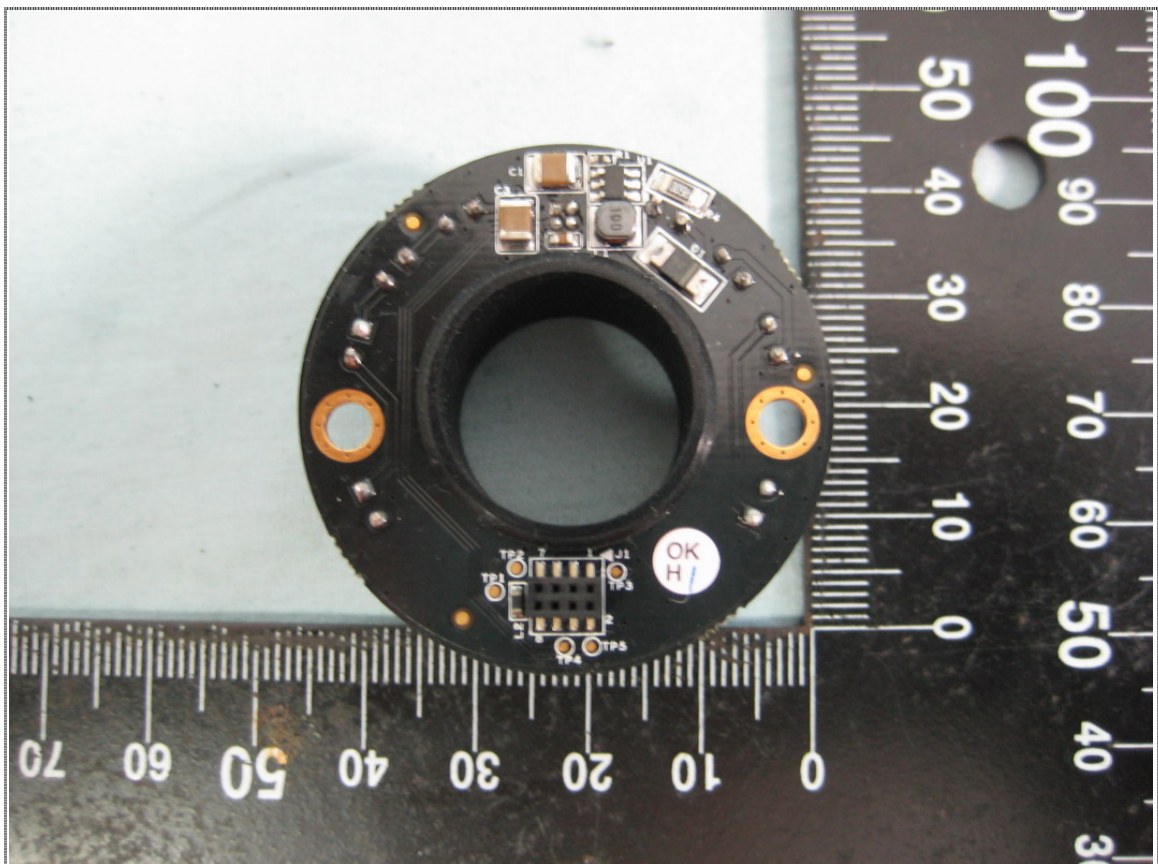

Rear View of Main Board-3

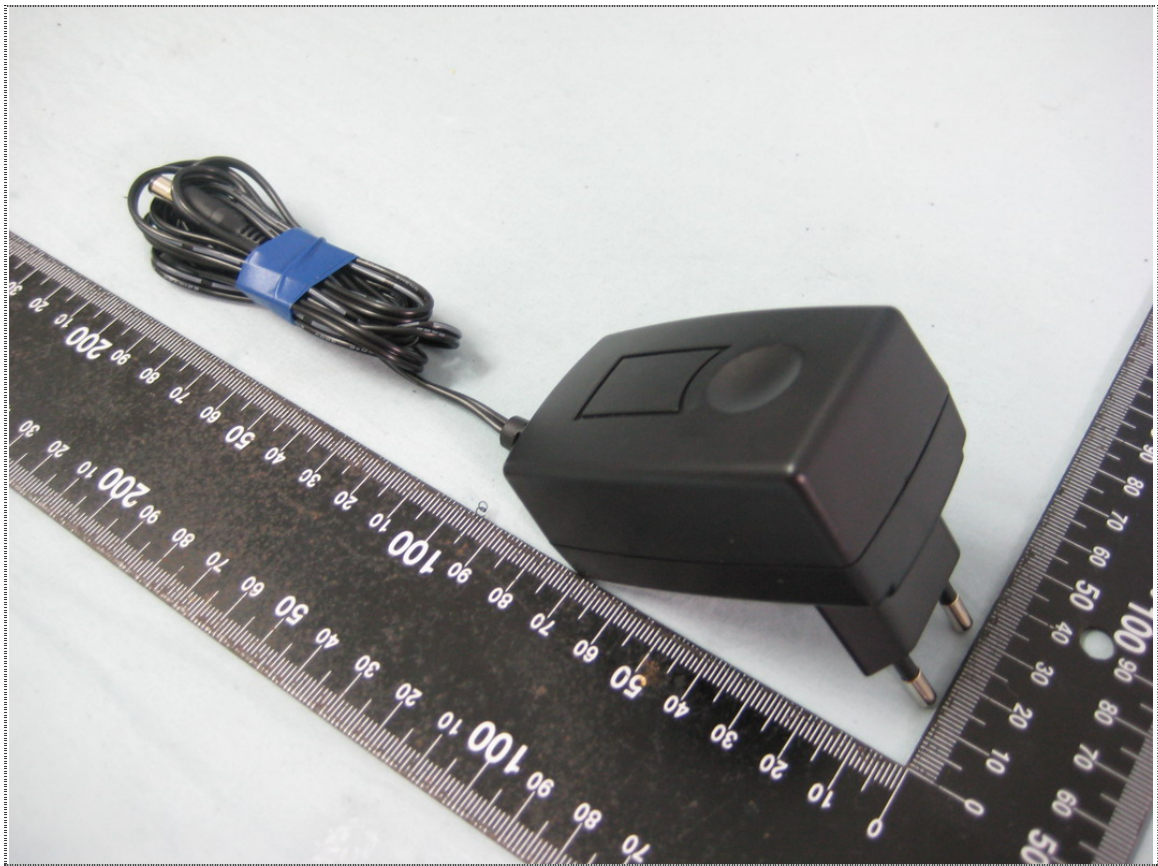


Front View of Adapter (European Plug)



Rear View of Adapter (European Plug)



Front View of Adapter (British Plug)

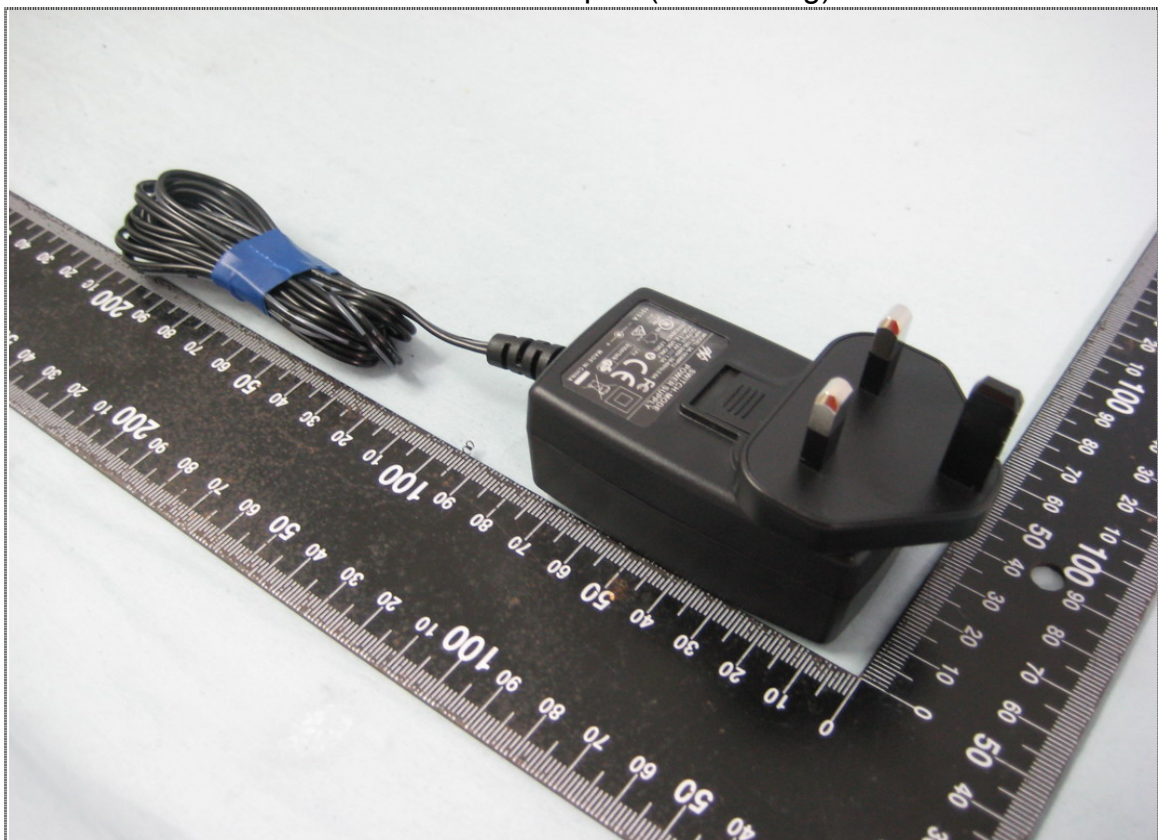

Rear View of Adapter (British Plug)



Front View of Adapter (Australian Plug)



Rear View of Adapter (Australian Plug)

16.2 Model No.: FD8133



Front View of EUT



Rear View of EUT