



EMC TEST REPORT

According to

EN 55022:2006/A1:2007 (Class A)
AS/NZS CISPR 22:2009 (Class A)
EN 61000-3-2 : 2009
EN 61000-3-3 : 2008

EN 55024 : 1998/ A1:2001/ A2:2003
IEC 61000-4-2 : 2008
IEC 61000-4-3 : 2010
IEC 61000-4-4 : 2010
IEC 61000-4-5 : 2005
IEC 61000-4-6 : 2008
IEC 61000-4-8 : 2009
IEC 61000-4-11 : 2004

Applicant : VIVOTEK INC.
Address : 6F, No. 192, Lien-Cheng Rd., Chung-Ho,
New Taipei City 235, Taiwan, R.O.C.
Equipment : Outdoor Bullet Network Camera
Model No. : IP8335H
Trade Name : VIVOTEK

- The test result refers exclusively to the test presented test model / sample.
- Without written approval of *CerpPASS Technology Corp.* the test report shall not be reproduced except in full.
- This test report is only applicable to European Community.



Contents

CERTIFICATE OF COMPLIANCE	5
1. Summary of Test Procedure and Test Results	6
2. Immunity Testing Performance Criteria Definition	6
3. Test Configuration of Equipment under Test	7
3.1. Feature of Equipment under Test.....	7
3.2. Test Manner	7
3.3. Description of Support Unit	8
3.4. General Information of Test.....	9
3.5. Measurement Uncertainty	9
4. Test of Conducted Emission	10
4.1. Test Limit	10
4.2. Test Procedures	11
4.3. Typical Test Setup	11
4.4. Measurement Equipment.....	11
4.5. Test Result and Data.....	12
4.6. Test Photographs of Power Port	16
4.7. Test Photographs of Telecommunication Port.....	17
5. Test of Radiated Emission	18
5.1. Test Limit	18
5.2. Test Procedures	19
5.3. Typical Test Setup	19
5.4. Measurement Equipment.....	20
5.5. Test Result and Data (30MHz ~ 1000MHz)	21
5.6. Test Result and Data (1000MHz ~ 6000MHz)	25
5.7. Test Photographs	27
6. Harmonics Test	28
6.1. Limits of Harmonics Current Measurement	28
6.2. Test Result and Data.....	28
7. Voltage Fluctuations Test	29
7.1. Test Procedure	29
7.2. Measurement Equipment.....	29
7.3. Test Result and Data.....	30
7.4. Test Photographs	31
8. Electrostatic Discharge Immunity Test	32
8.1. Test Procedure	32
8.2. Test Setup for Tests Performed in Laboratory.....	33
8.3. Test Severity Levels	34
8.4. Measurement Equipment.....	34
8.5. Test Result and Data.....	34
8.6. Test Photographs	36
9. Radio Frequency electromagnetic field immunity test	38
9.1. Test Procedure	38
9.2. Test Severity Levels	38



- 9.3. Measurement Equipment..... 38
- 9.4. Test Result and Data..... 39
- 9.5. Test Photographs 40
- 10. Electrical Fast Transient/ Burst Immunity Test..... 42**
 - 10.1. Test Procedure 42
 - 10.2. Test Severity Levels 42
 - 10.3. Measurement Equipment..... 43
 - 10.4. Test Result and Data..... 43
 - 10.5. Test Photographs 45
- 11. Surge Immunity Test..... 48**
 - 11.1. Test Procedure 48
 - 11.2. Test Severity Level 48
 - 11.3. Measurement Equipment..... 49
 - 11.4. Test Result and Data..... 49
 - 11.5. Test Photographs 50
- 12. Conduction Disturbances induced by Radio-Frequency Fields 51**
 - 12.1. Test Procedure 51
 - 12.2. Test Severity Levels 51
 - 12.3. Measurement Equipment..... 51
 - 12.4. Test Result and Data..... 52
 - 12.5. Test Photographs 53
- 13. Power Frequency Magnetic Field Immunity Test..... 55**
 - 13.1. Test Setup 55
 - 13.2. Test Severity Levels 55
 - 13.3. Measurement Equipment..... 55
 - 13.4. Test Result and Data..... 56
 - 13.5. Test Photographs 57
- 14. Voltage Dips and Voltage Interruptions Immunity Test Setup 59**
 - 14.1. Test Conditions..... 59
 - 14.2. Measurement Equipment..... 59
 - 14.3. Test Result and Data..... 60
 - 14.4. Test Photographs 61
- Appendix A. Photographs of EUT.....A1 ~ A8**



CERTIFICATE OF COMPLIANCE

According to

EN 55022:2006/A1:2007 (Class A)
AS/NZS CISPR 22:2009 (Class A)
EN 61000-3-2 : 2009
EN 61000-3-3 : 2008

EN 55024 : 1998/ A1:2001/ A2:2003
IEC 61000-4-2 : 2008
IEC 61000-4-3 : 2010
IEC 61000-4-4 : 2010
IEC 61000-4-5 : 2005
IEC 61000-4-6 : 2008
IEC 61000-4-8 : 2009
IEC 61000-4-11 : 2004

Applicant : VIVOTEK INC.

Address : 6F, No. 192, Lien-Cheng Rd., Chung-Ho,
New Taipei City 235, Taiwan, R.O.C.

Equipment : Outdoor Bullet Network Camera

Model No. : IP8335H

I **HEREBY** CERTIFY THAT :

The measurements shown in this test report were made in accordance with the procedures given in **EUROPEAN COUNCIL DIRECTIVE 2004/108/EC**.

The test was carried out on Sep. 24, 2011 at **CerpPASS Technology Corp.**

Signature

Hill Chen
EMC/RF B.U. Assistant Manager



1. Summary of Test Procedure and Test Results

Test Item	Normative References	Test Result
Conducted Emission	EN 55022:2006/ A1:2007	PASS
Radiated Emission	EN 55022:2006/ A1:2007	PASS
Harmonics	EN 61000-3-2 : 2006+A2: 2009	PASS
Voltage Fluctuations	EN 61000-3-3: 2008	PASS
Electrostatic Discharge Immunity Test (ESD)	IEC 61000-4-2 : 2008	PASS
Radio Frequency electromagnetic field immunity test (RS)	IEC 61000-4-3 : 2010	PASS
Electrical Fast Transient/ Burst Immunity Test (EFT)	IEC 61000-4-4 : 2010	PASS
Surge Immunity Test	IEC 61000-4-5 : 2005	PASS
Conduction Disturbances induced by Radio-Frequency Fields	IEC 61000-4-6 : 2008	PASS
Power Frequency Magnetic Field Immunity Test	IEC 61000-4-8 : 2009	PASS
Voltage Dips and Voltage Interruptions Immunity Test	IEC 61000-4-11 : 2004	PASS

2. Immunity Testing Performance Criteria Definition

- A. Normal performance within limits specified by the manufacture, requestor or purchaser.
- B. Temporary loss of function or degradation of performance which ceases after the disturbance ceases, and from which the equipment under test recovers its normal performance, without operator intervention.
- C. Temporary loss of function or degradation of performance, the correction of which requires operation intervention.
- D. Loss of function or degradation of performance which is not recoverable, owing to damage to hardware or software, or loss of data.



3. Test Configuration of Equipment under Test

3.1. Feature of Equipment under Test

Please refer to user manual.

3.2. Test Manner

- a. During testing, the interface cables and equipment positions were varied according to Europe Standard EN55022 Class A.
- b. The complete test system included remote workstation and EUT for EMI test. The remote workstation included Notebook and POE.
- c. The result of conduction test as follow:
Test Mode 1. LINK LAN (100Mbps) + Live View, Power by adapter: 3A-183WP12
Test Mode 2. LINK LAN (100Mbps) + Live View, Power by AC 24V Source: DA-48-24W
cause "Test Mode 2" generated the worst test result, it was reported as final data.
- d. The result of disturbances at telecommunication ports test as follow:
Test Mode 1. LAN (10M), Power by adapter: 3A-183WP12
Test Mode 2. LAN (100M), Power by adapter: 3A-183WP12
Test Mode 3. LAN (10M), Power by AC 24V Source: DA-48-24W
Test Mode 4. LAN (100M), Power by AC 24V Source: DA-48-24W
Test Mode 5. LAN (10M), Power by POE
Test Mode 6. LAN (100M), Power by POE
cause "Test Mode 5" & "Test Mode 6" generated the worst test result, they were reported as final data.
- e. The result of radiation test as follow:
Test Mode 1. LINK LAN (100Mbps) + Live View, Power by adapter: 3A-183WP12
Test Mode 2. LINK LAN (100Mbps) + Live View, Power by AC 24V Source: DA-48-24W
Test Mode 3. LINK LAN (100Mbps) + Live View, Power by POE
cause "Test Mode 3" generated the worst test result, it was reported as final data.
- f. The result of EMS test as follow:
Test Mode 1. LINK LAN (100Mbps) + Live View, Power by adapter: 3A-183WP12
Test Mode 2. LINK LAN (100Mbps) + Live View, Power by AC 24V Source: DA-48-24W
Test Mode 3. LINK LAN (100Mbps) + Live View, Power by POE
- g. During the disturbances at telecommunication port test, the condition of LAN utilization in excess of 10%.
- h. An executive program, "PING.EXE" under WIN 7 was executed to transmit and receive data to the remote workstation through LAN.



3.3. Description of Support Unit

Device	Manufacturer	Model No.	Description
Remote Workstation			
Notebook	SONY	VPCEB25FW	Power Cable, Adapter Unshielding 1.8m
POE	NETGEAR	GS108P	N/A

Use Cable:

Cable	Quantit	Description
RJ45	1	Unshielding, 15.0m



3.4. General Information of Test

Test Site :	Cerpass Technology Corp. 2F-11, No. 3, Yuan Qu St., (Nankang Software Park), Taipei, Taiwan 115, R.O.C.
Test Site Location (OATS2-SD) :	No.68-1, Shihbachongsi, Shihding Township, Taipei City 223, Taiwan, R.O.C.
FCC Registration Number :	TW1049, TW1061, 488071, 390316
IC Registration Number :	4934B-1, 4934D-1
VCCI Registration Number :	T-543 for Telecommunication Test C-3328 for Conducted emission test R-3013 for Radiated emission test G-97 for radiated disturbance above 1GHz
Test in Compliance with:	EMI Test (conduction and radiation) : EN 55022:2006/A1:2007 Class A AS/NZS CISPR 22:2009 Class A Harmonics Test : EN 61000-3-2:2009 Voltage Fluctuations Test : EN 61000-3-3:2008 EMS Test : EN 55024 :1998/ A1:2001/ A2:2003 ESD : IEC 61000-4-2 : 2008 RS : IEC 61000-4-3 : 2010 EFT : IEC 61000-4-4 : 2010 SURGE : IEC 61000-4-5 : 2005 CS : IEC 61000-4-6 : 2008 Power Frequency Magnetic Field : IEC 61000-4-8 : 2009 DIPS : IEC 61000-4-11 : 2004
Frequency Range Investigated :	Conducted Emission Test: from 150kHz to 30 MHz Radiated Emission Test: from 30 MHz to 6,000 MHz
Test Distance :	The test distance of radiated emission below 1GHz from antenna to EUT is 10 M. The test distance of radiated emission above 1GHz from antenna to EUT is 3 M.

3.5. Measurement Uncertainty

Measurement Item	Measurement Frequency	Polarization	Uncertainty
Conducted Emission	9 kHz ~ 30 MHz	LINE / NEUTRAL	2.71dB
Radiated Emission	30 MHz ~ 1,000 MHz	Vertical	3.52 dB
		Horizontal	3.39 dB
	1,000 MHz ~ 18,000 MHz	Vertical	4.39 dB
		Horizontal	5.25 dB



4. Test of Conducted Emission

4.1. Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 kHz and return leads of the EUT according to the methods defined in European Standard EN 55022. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 4.2. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position producing maximum conducted emissions.

Table 1 Class A Line Conducted Emission Limits:

Frequency range (MHz)	Limits (dB μ V)	
	Quasi Peak	Average
0.15 to 0.50	79	66
0.50 to 30	73	60

Note : The lower limits shall apply at the transition frequencies.

Table 2 - Limits of conducted common mode (asymmetric mode) disturbance at telecommunication ports in the frequency range 0.15 MHz to 30 MHz for class A equipment.


Frequency range (MHz)	Voltage limits dB(μ V)		Current limits dB(μ A)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 to 0.5	97 to 87	84 to 74	53 to 43	40 to 30
0.5 to 30	87	74	43	30

Note 1: The limits decrease linearly with the logarithm of the frequency in the range 0.15 to 0.5 MHz.
 Note 2 : The current and voltage disturbance limits are derived for use with an impedance stabilization network (ISN) which presents a common mode (asymmetric mode) impedance of 150 Ω to the telecommunication under test (conversion factor is $20 \log_{10} 150/1 = 44\text{dB}$).

4.2. Test Procedures

- a. The EUT was placed on a desk 0.8 meters height from the metal ground plane and 0.4 meter from the conducting wall of the shielding room and it was kept at least 0.8 meters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connecting to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The CISPR states that a 50 ohm, 50 micro-Henry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 kHz to 30 MHz was searched
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

4.3. Typical Test Setup

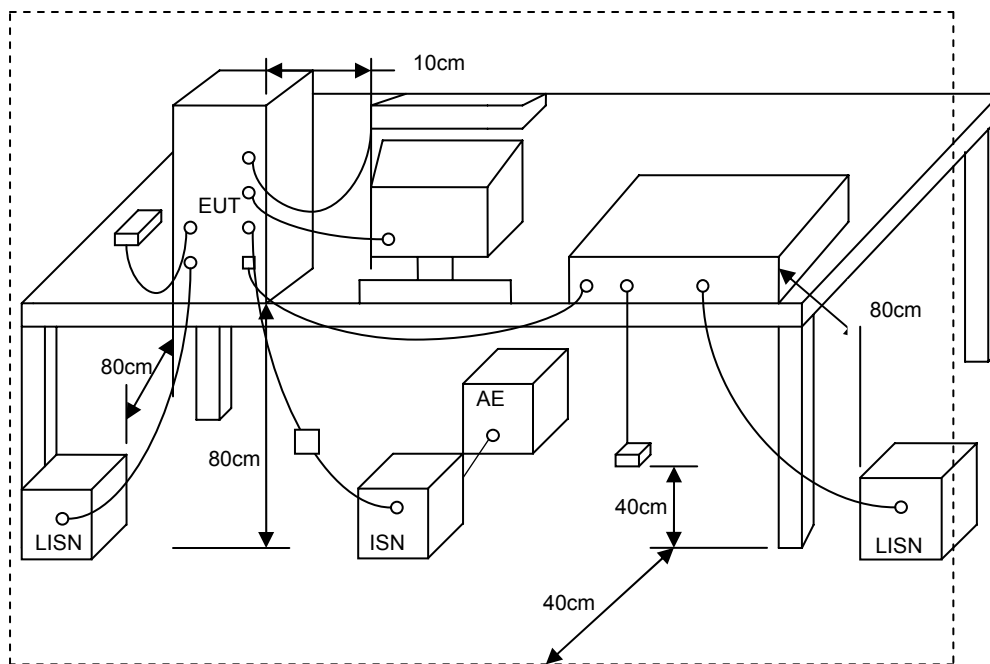

4.4. Measurement Equipment


Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date
EMI Receiver	R&S	ESCI	100443	2011/02/08	2012/02/07
LISN	Schwarzbeck	NSLK 8127	8127-516	2011/05/05	2012/05/04
LISN	Schwarzbeck	NSLK 8127	8127-568	2011/08/24	2012/08/23
ISN	TESEQ GMBH	ISN T8	24315	2011/06/01	2012/05/31



4.5. Test Result and Data

4.5.1 Conducted Emission for Power Port Test Data


Power	: AC 24V	Pol/Phase	: LINE
Test Mode 2	: LINK LAN (100Mbps) + Live View	Temperature	: 24 °C
Memo	: Power by AC 24V Source: DA-48-24W	Humidity	: 58 %
Test Date	: Sep. 19, 2011		

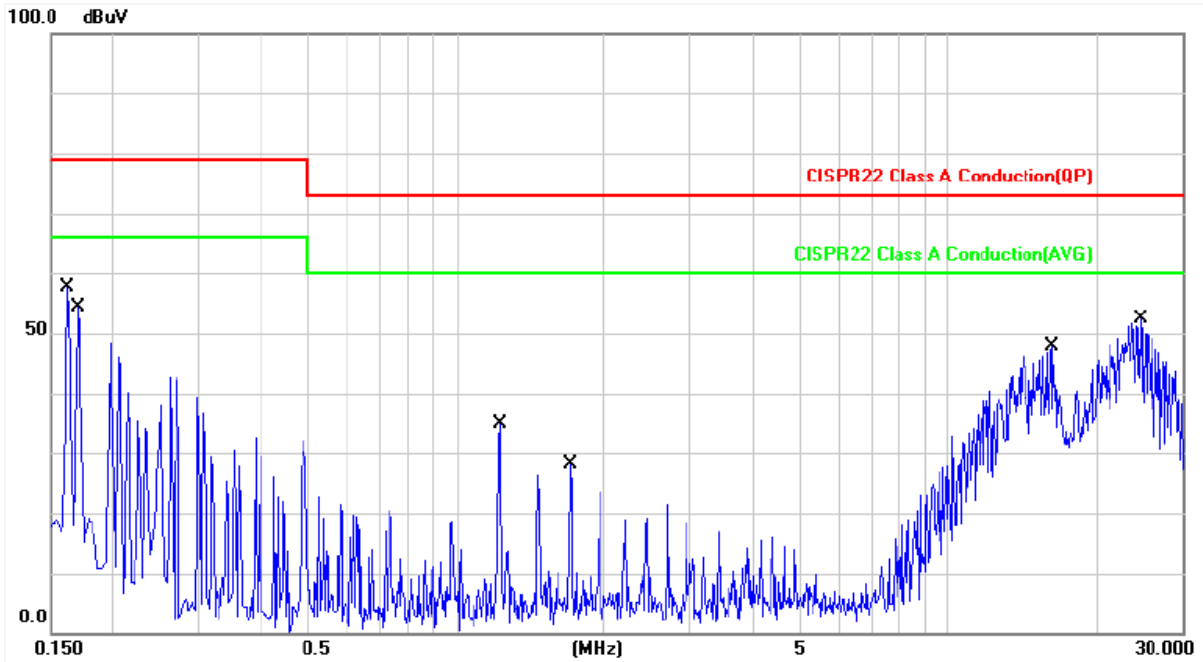

No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1620	0.12	50.44	50.56	79.00	-28.44	QP	P
2	0.1620	0.12	21.24	21.36	66.00	-44.64	AVG	P
3	0.1700	0.12	49.05	49.17	79.00	-29.83	QP	P
4	0.1700	0.12	20.94	21.06	66.00	-44.94	AVG	P
5	1.2260	0.21	33.43	33.64	73.00	-39.36	QP	P
6	1.2260	0.21	29.24	29.45	60.00	-30.55	AVG	P
7	1.7140	0.25	26.71	26.96	73.00	-46.04	QP	P
8	1.7140	0.25	21.84	22.09	60.00	-37.91	AVG	P
9	16.2300	0.83	46.09	46.92	73.00	-26.08	QP	P
10	16.2300	0.83	42.48	43.31	60.00	-16.69	AVG	P
11	24.7340	1.16	49.30	50.46	73.00	-22.54	QP	P
12	24.7340	1.16	45.86	47.02	60.00	-12.98	AVG	P



Power	: AC 24V	Pol/Phase	: NEUTRAL
Test Mode 2	: LINK LAN (100Mbps) + Live View	Temperature	: 24 °C
Memo	: Power by AC 24V Source: DA-48-24W	Humidity	: 58 %
Test Date	: Sep. 19, 2011		

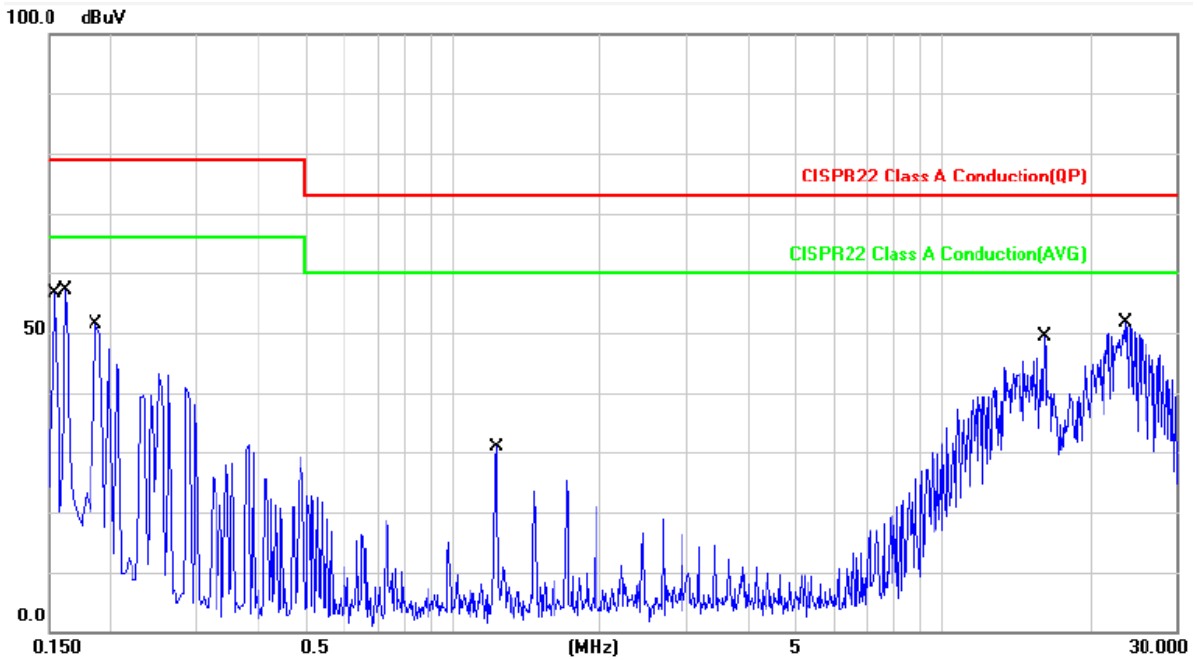


No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1620	0.12	50.44	50.56	79.00	-28.44	QP	P
2	0.1620	0.12	21.24	21.36	66.00	-44.64	AVG	P
3	0.1700	0.12	49.05	49.17	79.00	-29.83	QP	P
4	0.1700	0.12	20.94	21.06	66.00	-44.94	AVG	P
5	1.2260	0.21	33.43	33.64	73.00	-39.36	QP	P
6	1.2260	0.21	29.24	29.45	60.00	-30.55	AVG	P
7	1.7140	0.25	26.71	26.96	73.00	-46.04	QP	P
8	1.7140	0.25	21.84	22.09	60.00	-37.91	AVG	P
9	16.2300	0.83	46.09	46.92	73.00	-26.08	QP	P
10	16.2300	0.83	42.48	43.31	60.00	-16.69	AVG	P
11	24.7340	1.16	49.30	50.46	73.00	-22.54	QP	P
12	24.7340	1.16	45.86	47.02	60.00	-12.98	AVG	P



4.5.2 Conducted Emission for Telecommunication Port Test Data


Power	: POE	Temperature	: 24 °C
Test Mode 5	: LAN (10M)	Humidity	: 65 %
Memo	: Power by POE	Test Date	: Sep. 19, 2011

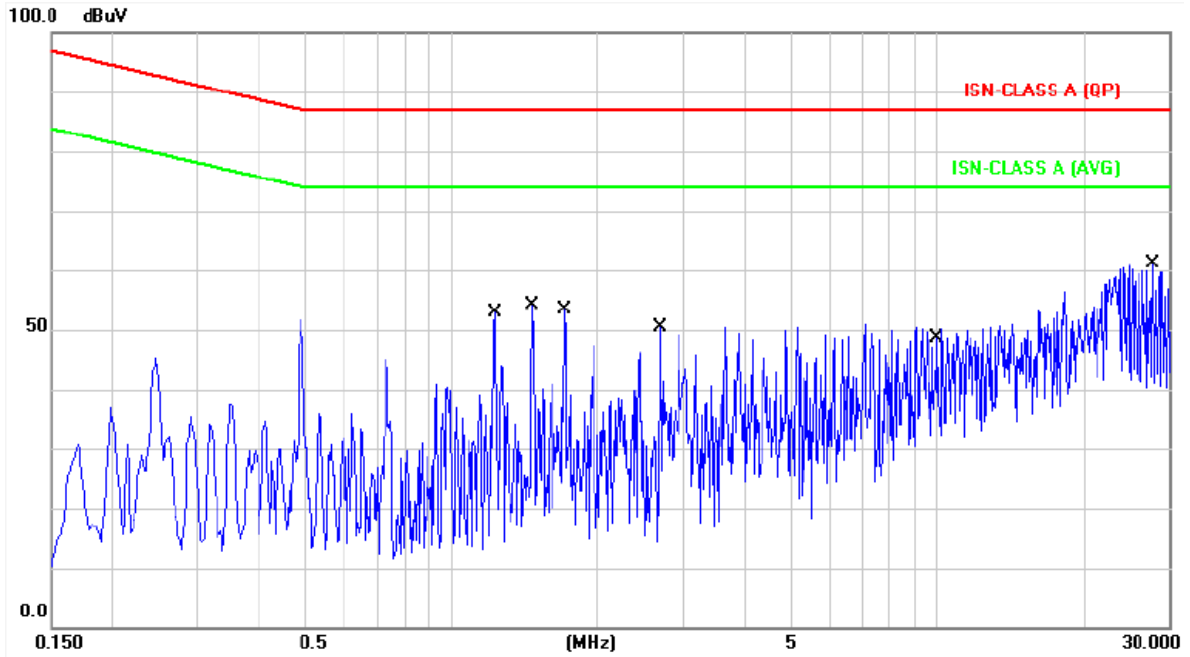

No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	1.2260	10.14	41.38	51.52	87.00	-35.48	QP	P
2	1.2260	10.14	41.36	51.50	74.00	-22.50	AVG	P
3	1.4700	10.16	43.05	53.21	87.00	-33.79	QP	P
4	1.4700	10.16	41.22	51.38	74.00	-22.62	AVG	P
5	1.7140	10.19	42.68	52.87	87.00	-34.13	QP	P
6	1.7140	10.19	42.43	52.62	74.00	-21.38	AVG	P
7	2.6940	10.23	39.44	49.67	87.00	-37.33	QP	P
8	2.6940	10.23	39.40	49.63	74.00	-24.37	AVG	P
9	10.0000	10.52	31.46	41.98	87.00	-45.02	QP	P
10	10.0000	10.52	22.26	32.78	74.00	-41.22	AVG	P
11	27.9180	10.70	49.44	60.14	87.00	-26.86	QP	P
12	27.9180	10.70	46.65	57.35	74.00	-16.65	AVG	P



Power	: POE	Temperature	: 24 °C
Test Mode 6	: LAN (100M)	Humidity	: 65 %
Memo	: Power by POE	Test Date	: Sep. 19, 2011

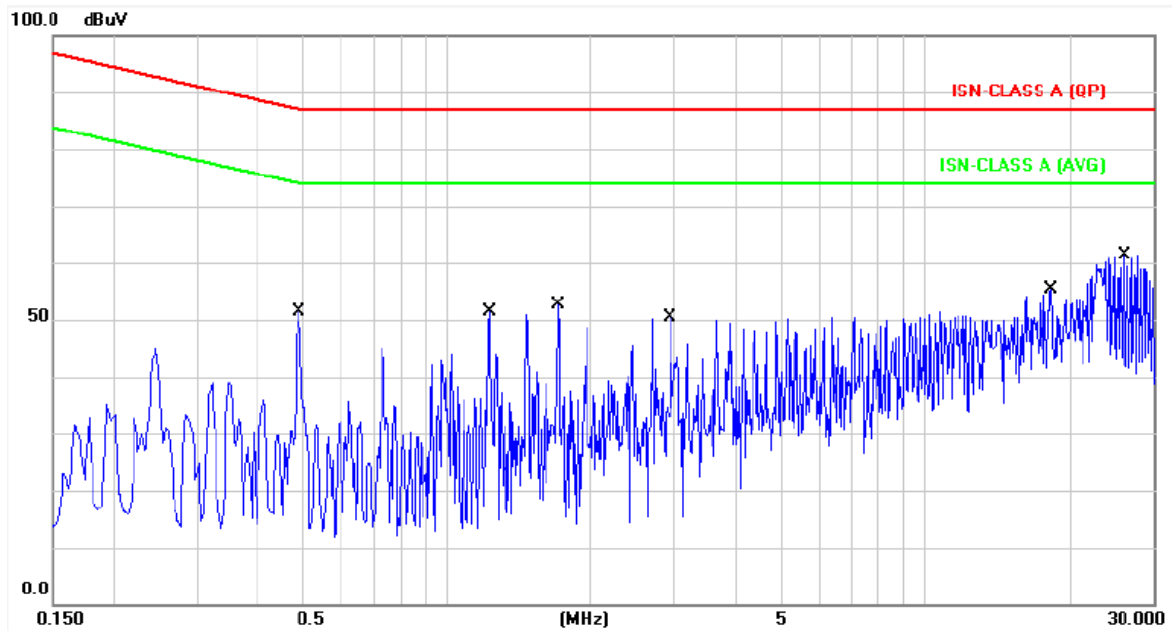

No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.4900	10.03	40.99	51.02	87.17	-36.15	QP	P
2	0.4900	10.03	41.32	51.35	74.17	-22.82	AVG	P
3	1.2260	10.14	41.22	51.36	87.00	-35.64	QP	P
4	1.2260	10.14	41.20	51.34	74.00	-22.66	AVG	P
5	1.7140	10.19	42.55	52.74	87.00	-34.26	QP	P
6	1.7140	10.19	42.30	52.49	74.00	-21.51	AVG	P
7	2.9380	10.24	39.35	49.59	87.00	-37.41	QP	P
8	2.9380	10.24	38.87	49.11	74.00	-24.89	AVG	P
9	18.3660	10.49	44.24	54.73	87.00	-32.27	QP	P
10	18.3660	10.49	40.66	51.15	74.00	-22.85	AVG	P
11	26.2020	10.65	49.93	60.58	87.00	-26.42	QP	P
12	26.2020	10.65	48.56	59.21	74.00	-14.79	AVG	P

Test engineer: Dean



4.6. Test Photographs of Power Port

Front View




Rear View





4.7. Test Photographs of Telecommunication Port

Rear View

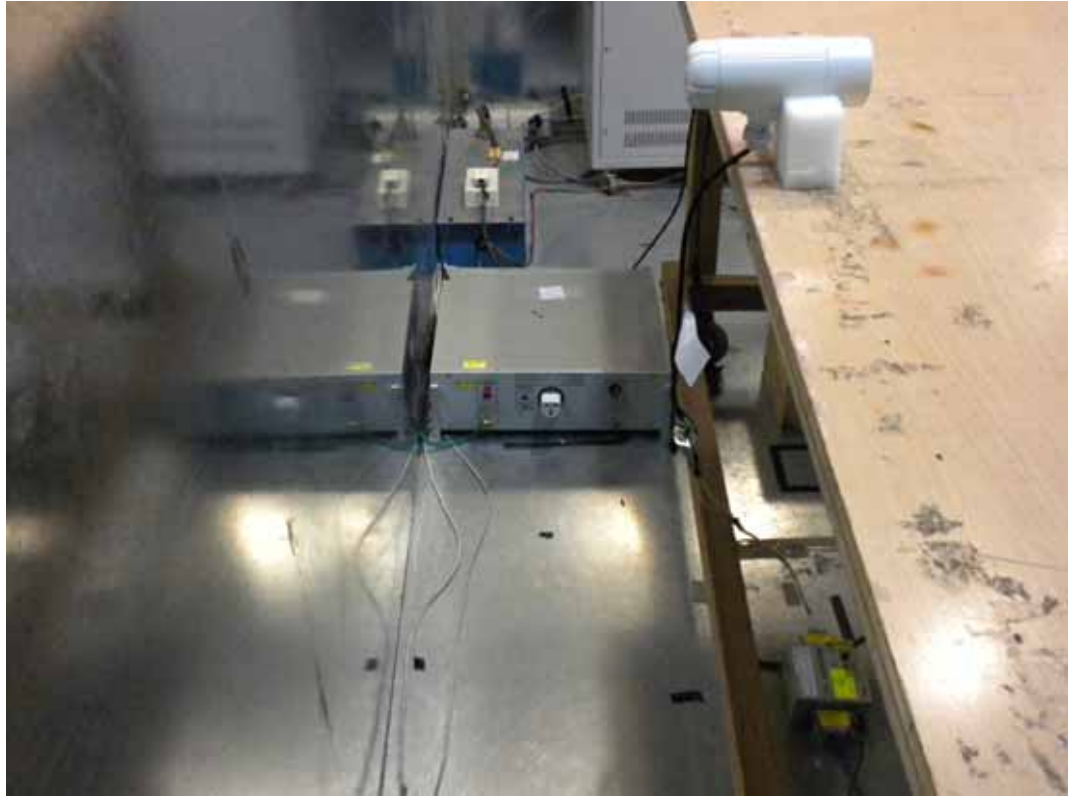



5. Test of Radiated Emission

5.1. Test Limit

The EUT shall meet the limits of below Table when measured at the measuring distance R in accordance with the methods described in European Standard EN 55022 Clause 10. If the reading on the measuring receiver shows fluctuations close to the limit, the reading shall be observed for at least 15 s at each measurement frequency; the highest reading shall be recorded, with the exception of any brief isolated high reading, which shall be ignored.

Table – Limits for radiated disturbance of class A ITE at a measuring distance of 10 m

Frequency range MHz	Quasi-peak limits dB(μV/m)
30 to 230	40
230 to 1000	47
NOTE 1 The lower limit shall apply at the transition frequency.	
NOTE 2 Additional provisions may be required for cases where interference occurs.	

The EUT shall meet the limits of below Table when measured in accordance with the method described in European Standard EN 55022 Clause 10 and the conditional testing procedure described below.

Table – Limits for radiated disturbance of class A ITE at a measuring distance of 3 m

Frequency range GHz	Average limit dB(μV/m)	Peak limits dB(μV/m)
1 to 3	56	76
3 to 6	60	80
NOTE The lower limit applies at the transition frequency.		

• **Conditional testing procedure:**

The highest internal source of an EUT is defined as the highest frequency generated or used within the EUT or on which the EUT operates or tunes.

If the highest frequency of the internal sources of the EUT is less than 108 MHz, the measurement shall only be made up to 1 GHz.

If the highest frequency of the internal sources of the EUT is between 108 MHz and 500 MHz, the measurement shall only be made up to 2 GHz.

If the highest frequency of the internal sources of the EUT is between 500 MHz and 1 GHz, the measurement shall only be made up to 5 GHz.


If the highest frequency of the internal sources of the EUT is above 1 GHz, the measurement shall be made up to 5 times the highest frequency or 6 GHz, whichever is less.

5.2. Test Procedures


- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3/10 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a half wave dipole and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.

5.3. Typical Test Setup

Below 1GHz Test Setup

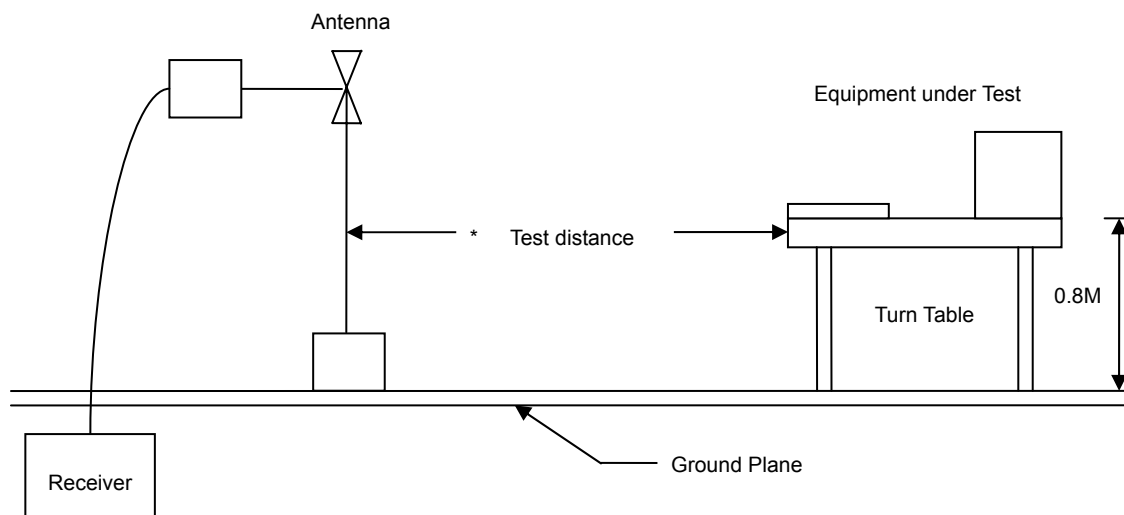

Above 1GHz Test Setup

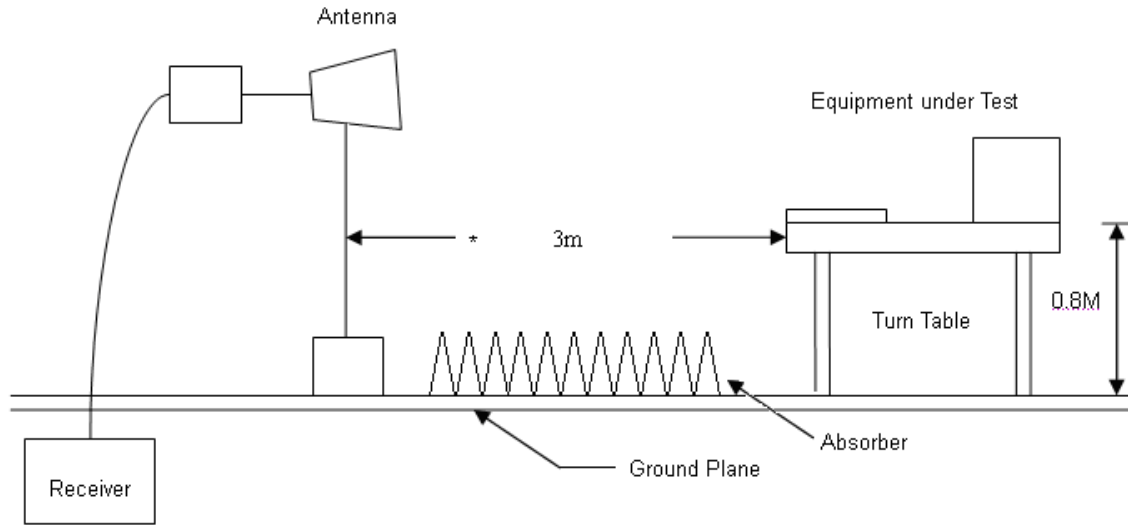


5.4. Measurement Equipment

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date
Amplifier	Agilent	8447D	2944A10531	2011/01/21	2012/01/20
Bilog Antenna	Schaffner	CBL6112D	22242	2011/02/09	2012/02/08
EMI Receiver	R&S	ESCI	101200	2011/07/26	2012/07/25
SPECTRUM ANALYZER	R&S	FSP40	100219	2010/11/05	2011/11/04
HORN ANTENNA	EMCO	3115	31589	2011/05/02	2012/05/01
Preamplifier	Agilent	8449B	3008A01954	2011/03/02	2012/03/01



5.5. Test Result and Data (30MHz ~ 1000MHz)

Power	: POE	Pol/Phase	: VERTICAL
Test Mode 3	: LINK LAN (100Mbps) + Live View	Temperature	: 27 °C
Memo	: Power by POE	Humidity	: 61 %

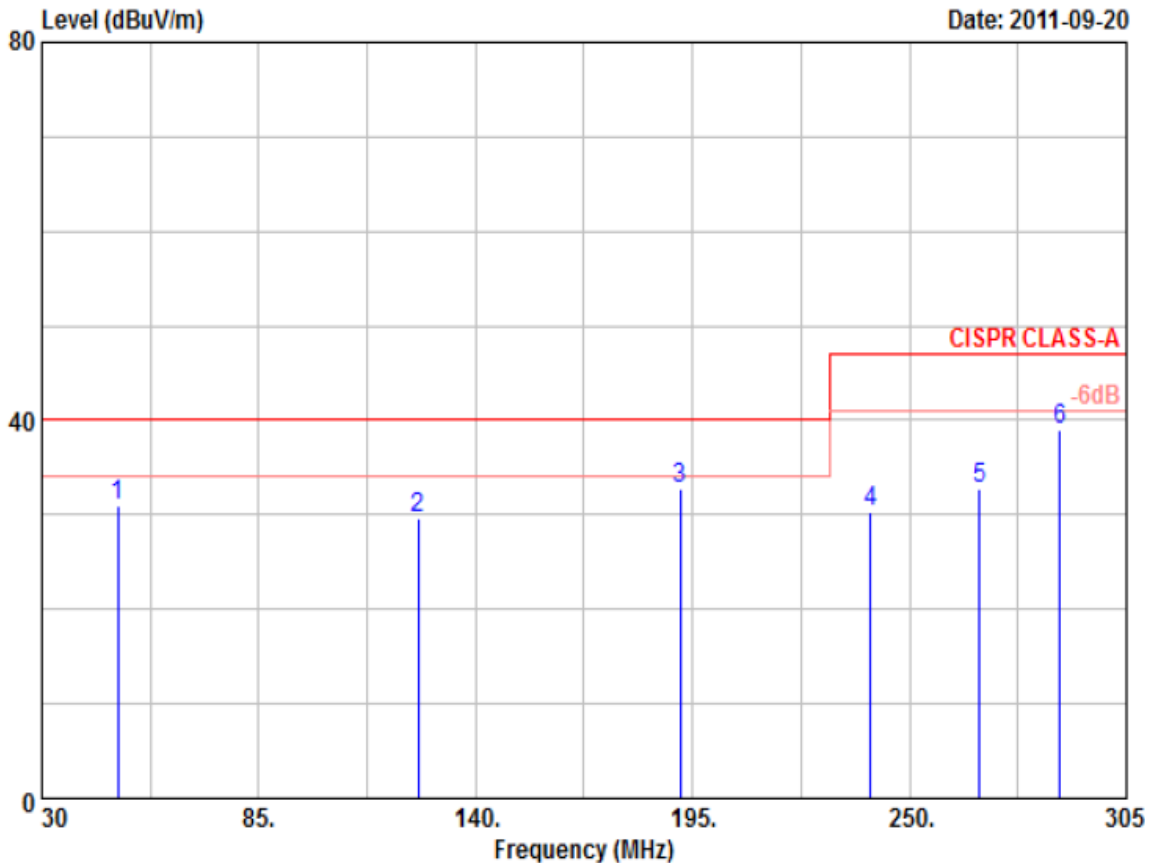


Item	Freq MHz	Read Value dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark	Ant Pos cm	Tab Pos Deg
1	49.250	48.259	-17.233	31.026	40.000	-8.974	QP	400	0
2	125.425	42.379	-12.714	29.665	40.000	-10.335	QP	400	0
3	191.975	48.981	-16.298	32.683	40.000	-7.317	QP	400	0
4	240.100	44.333	-14.115	30.218	47.000	-16.782	QP	400	0
5	267.875	44.738	-11.910	32.828	47.000	-14.172	QP	400	0
6	288.225	49.749	-10.827	38.922	47.000	-8.078	QP	100	230

Remarks: 1. Result = Read Value + Factor
2. Factor = Antenna factor + Cable loss - Amplifier factor



Power	: POE	Pol/Phase	: VERTICAL
Test Mode 3	: LINK LAN (100Mbps) + Live View	Temperature	: 27 °C
Memo	: Power by POE	Humidity	: 61 %

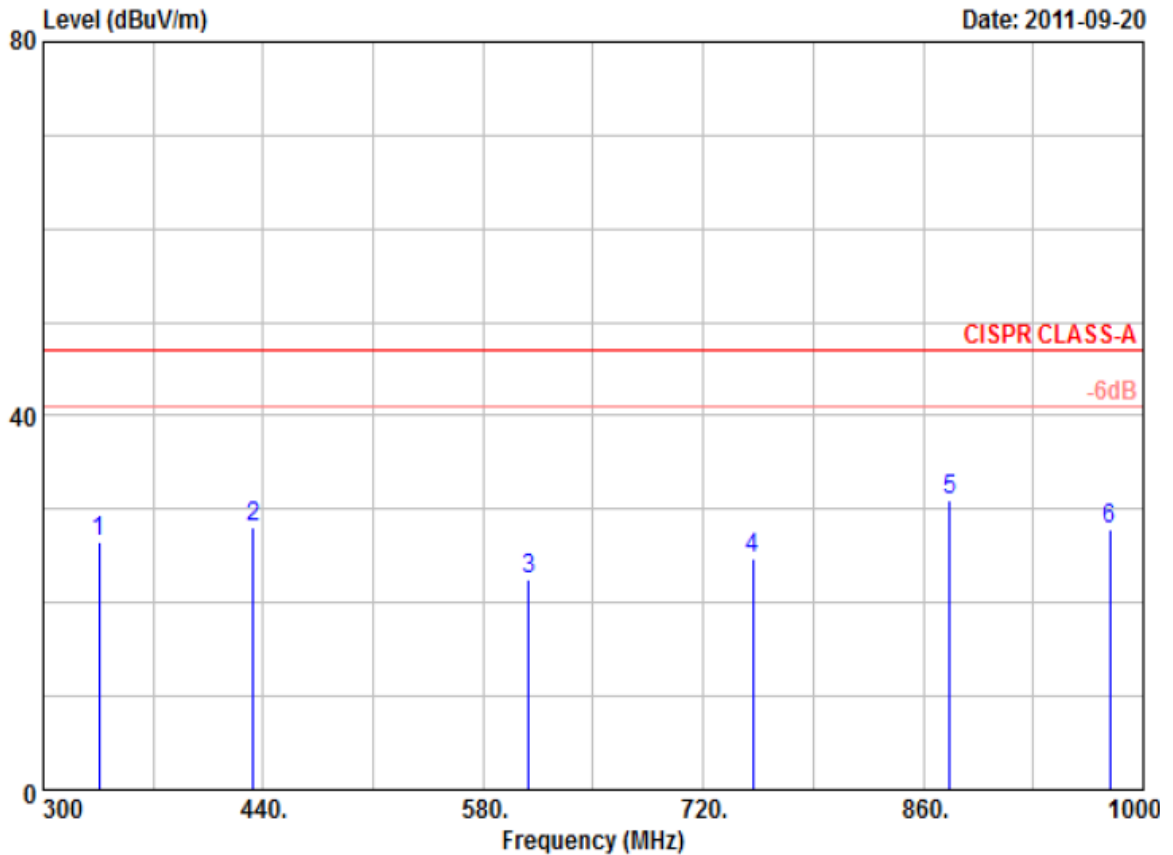


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	335.700	36.007	-9.584	26.423	47.000	-20.577	QP	100	0
2	433.700	35.546	-7.439	28.107	47.000	-18.893	QP	100	0
3	608.700	25.931	-3.398	22.533	47.000	-24.467	QP	100	0
4	751.500	25.349	-0.620	24.729	47.000	-22.271	QP	100	0
5	876.800	28.528	2.518	31.046	47.000	-15.954	QP	100	0
6	979.000	23.912	3.890	27.802	47.000	-19.198	QP	100	0

Remarks: 1. Result = Read Value + Factor
 2. Factor = Antenna factor + Cable loss - Amplifier factor



Power	: POE	Pol/Phase	: HORIZONTAL
Test Mode 3	: LINK LAN (100Mbps) + Live View	Temperature	: 27 °C
Memo	: Power by POE	Humidity	: 61 %

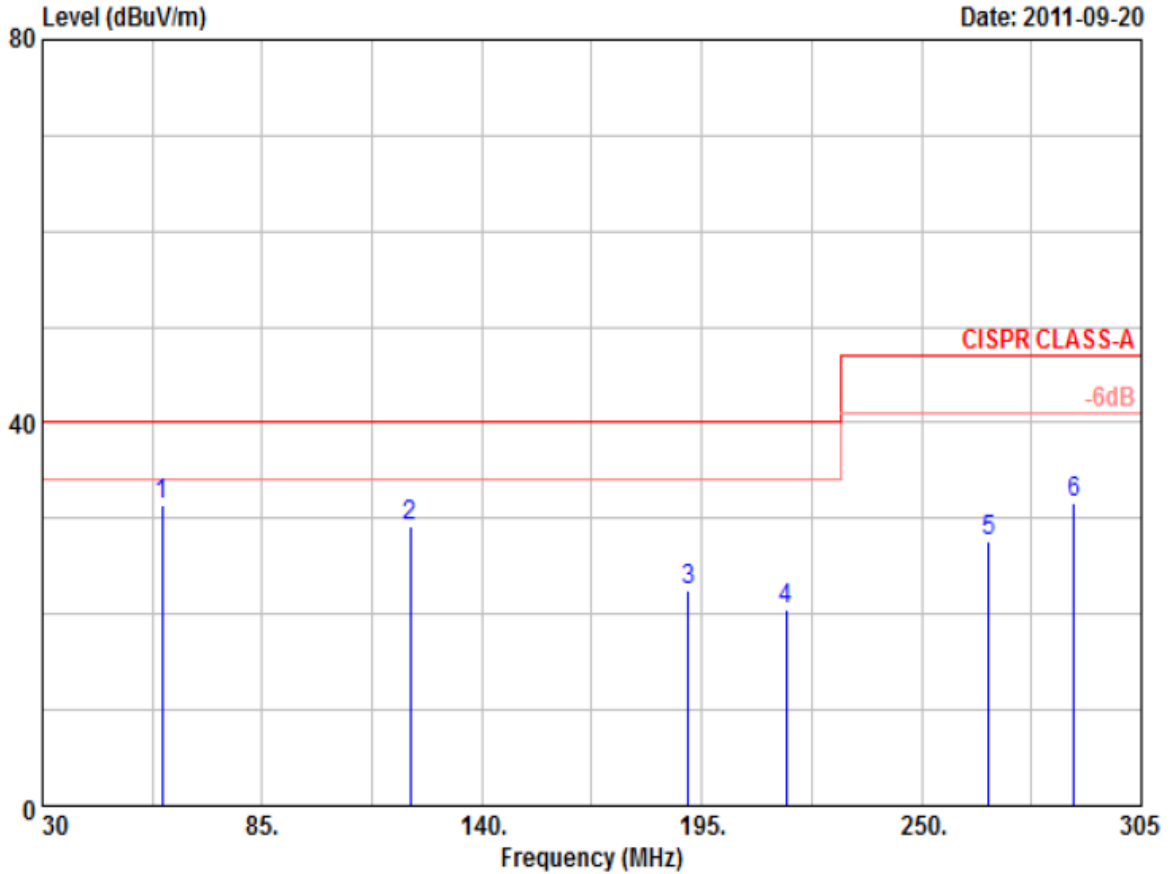


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	59.975	50.150	-18.741	31.409	40.000	-8.591	QP	400	0
2	122.125	42.996	-13.751	29.245	40.000	-10.755	QP	400	0
3	191.700	40.198	-17.725	22.473	40.000	-17.527	QP	400	0
4	216.175	36.593	-16.176	20.417	40.000	-19.583	QP	400	0
5	266.775	39.451	-11.847	27.604	47.000	-19.396	QP	400	0
6	288.225	42.757	-11.141	31.616	47.000	-15.384	QP	400	0

Remarks: 1. Result = Read Value + Factor
 2. Factor = Antenna factor + Cable loss - Amplifier factor



Power	: POE	Pol/Phase	: HORIZONTAL
Test Mode 3	: LINK LAN (100Mbps) + Live View	Temperature	: 27 °C
Memo	: Power by POE	Humidity	: 61 %

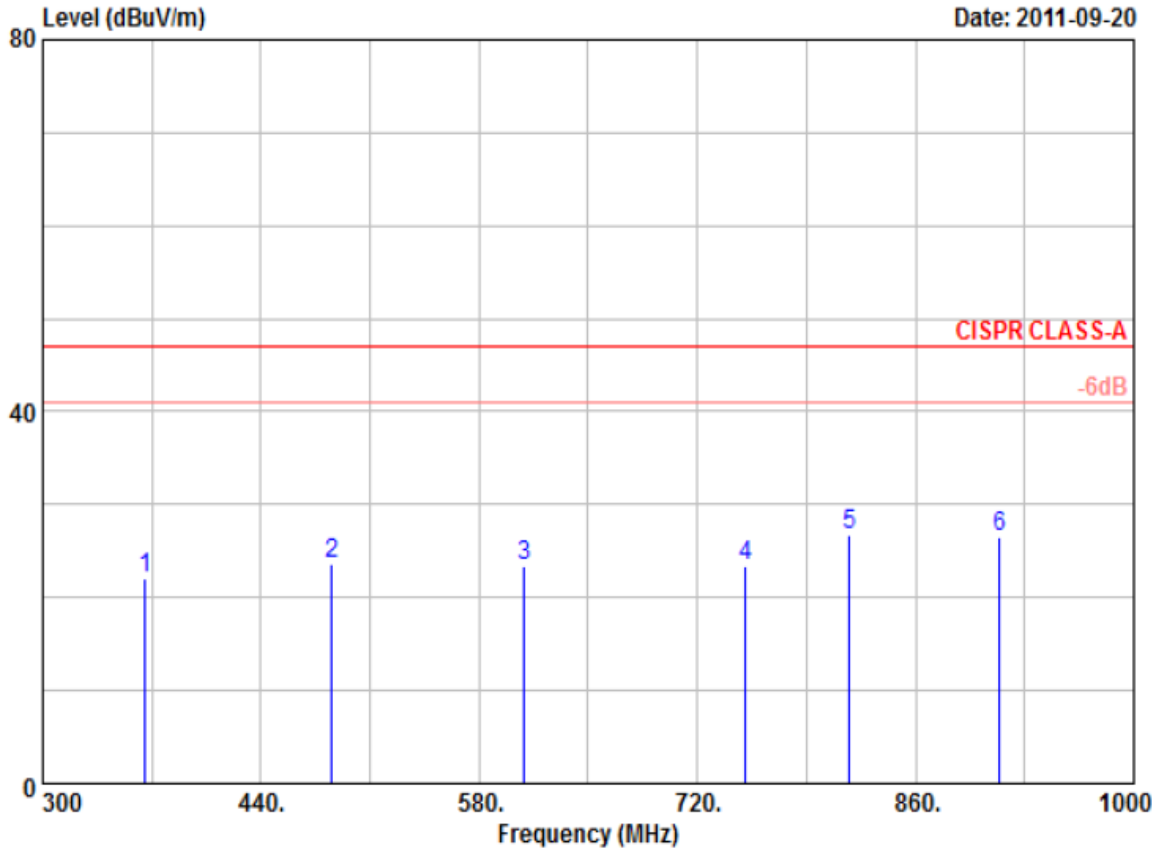


Item	Freq MHz	Read Value dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark	Ant Pos cm	Tab Pos Deg
1	365.800	31.492	-9.364	22.128	47.000	-24.872	QP	100	0
2	485.500	28.858	-5.145	23.713	47.000	-23.287	QP	100	0
3	608.700	27.049	-3.619	23.430	47.000	-23.570	QP	100	0
4	750.800	24.057	-0.573	23.484	47.000	-23.516	QP	100	0
5	817.300	25.511	1.240	26.751	47.000	-20.249	QP	100	0
6	913.900	23.782	2.798	26.580	47.000	-20.420	QP	100	0

Remarks: 1. Result = Read Value + Factor
 2. Factor = Antenna factor + Cable loss - Amplifier factor



5.6. Test Result and Data (1000MHz ~ 6000MHz)

Power	: POE	Pol/Phase	: VERTICAL
Test Mode 3	: LINK LAN (100Mbps) + Live View	Temperature	: 25 °C
Memo	: Power by POE	Humidity	: 58 %

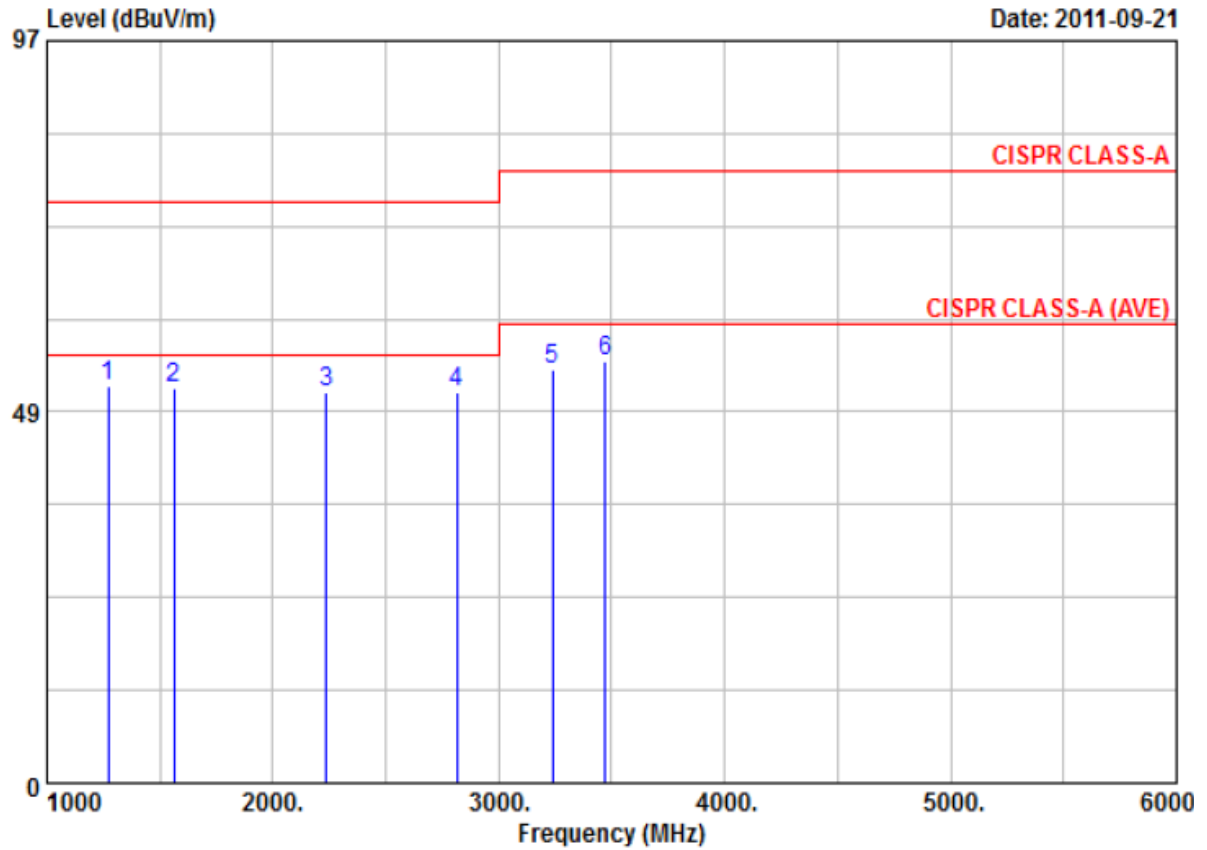


Item	Freq MHz	Read Value dBpW	Factor dB/m	Result dBpW	Limit dBpW	Margin dB	Remark	Ant Pos cm	Tab Pos Deg
1	1272.00	59.70	-7.77	51.93	76.00	-24.07	Peak	100	360
2	1564.00	57.61	-6.04	51.57	76.00	-24.43	Peak	100	360
3	2235.00	53.67	-2.51	51.16	76.00	-24.84	Peak	100	360
4	2816.00	51.18	-0.02	51.16	76.00	-24.84	Peak	100	360
5	3238.00	52.23	1.77	54.00	80.00	-26.00	Peak	100	360
6	3471.00	52.40	2.60	55.00	80.00	-25.00	Peak	100	360

Remarks: 1. Result = Read Value + Factor
 2. Factor = Antenna factor + Cable loss - Amplifier factor



Power	: POE	Pol/Phase	: HORIZONTAL
Test Mode 3	: LINK LAN (100Mbps) + Live View	Temperature	: 25 °C
Memo	: Power by POE	Humidity	: 58 %

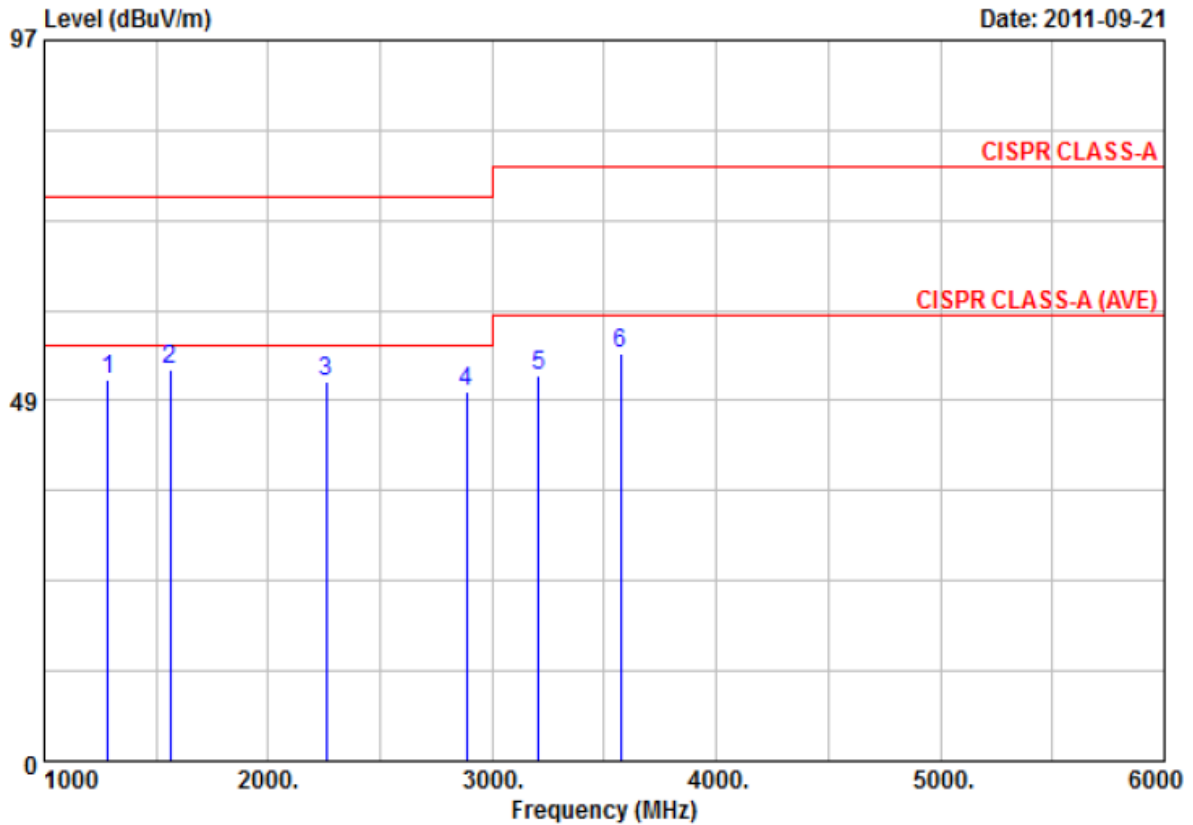

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBpW	dB/m	dBpW	dBpW	dB		cm	Deg
1	1284.00	59.07	-7.69	51.38	76.00	-24.62	Peak	100	0
2	1564.00	58.71	-6.04	52.67	76.00	-23.33	Peak	100	0
3	2257.00	53.38	-2.44	50.94	76.00	-25.06	Peak	100	0
4	2883.00	49.28	0.32	49.60	76.00	-26.40	Peak	100	0
5	3207.00	50.35	1.64	51.99	80.00	-28.01	Peak	100	0
6	3573.00	51.83	3.00	54.83	80.00	-25.17	Peak	100	0

Remarks: 1. Result = Read Value + Factor
 2. Factor = Antenna factor + Cable loss - Amplifier factor

Test engineer: Karp



5.7. Test Photographs

Front View



Rear View





6. Harmonics Test

6.1. Limits of Harmonics Current Measurement

Limits for Class A equipment		Limits for Class D equipment		
Harmonics Order n	Max. Permissible harmonics current A	Harmonics Order n	Max. Permissible harmonics current per watt mA/W	Max. Permissible harmonics current A
Odd harmonics		Odd Harmonics only		
3	2.30	3	3.4	2.30
5	1.14	5	1.9	1.14
7	0.77	7	1.0	0.77
9	0.40	9	0.5	0.40
11	0.33	11	0.35	0.33
13	0.21	13	0.30	0.21
15<=n<=39	0.15 x 15/n	15<=n<=39	3.85/n	0.15 x 15/n
Even harmonics				
2	1.08			
4	0.43			
6	0.30			
8<=n<=40	0.23 x 8/n			

NOTE:

1. Class A and Class D are classified according to item section 5 of EN 61000-3-2: 2009.
2. According go section 7 of EN 61000-3-2: 2009, the above limits for all equipment except for lighting equipment are for all applications having a rated power > 75 W and no limits apply for equipment with a rated power up to and including 75 W.

6.2. Test Result and Data

As specified on clause 7 and figure Z1 of EN 61000-3-2:2009, the limits are not specified for equipment with a rated power of 75W or less.

The EUT meets the above condition, so it conforms to EN 61000-3-2



7. Voltage Fluctuations Test

7.1. Test Procedure

The equipment shall be tested under the conditions of **Clause 5**.

The total impedance of the test circuit, excluding the appliance under test, but including the internal impedance of the supply source, shall be equal to the reference impedance. The stability and tolerance of the reference impedance shall be adequate to ensure that the overall accuracy of $\pm 8\%$ is achieved during the whole assessment procedure.

7.2. Measurement Equipment

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date
Power & Harmonics Analyzer	TTI	HA1600	198226	2010/12/28	2011/12/27



7.3. Test Result and Data

Basic Standard : EN 61000-3-3 Temperature : 24
Final Test Result : PASS Relative Humidity : 57 %
Test Data : Sep. 22, 2011

Supply Voltage: 230.5 to 230.6 Vrms 328.3 Vpk Frequency: 50.01 Hz
THD: 0.5% Crest Factor: 1.424 peak at: 93.4 deg
Load Power: 0.006 kW 0.020 kVA Power Factor: 0.392
Load Current: 0.06 to 0.08 Arms 0.41 Apk Crest Factor: 5.003

Voltage Variations
Highest Half-cycle level: +0.35%
Lowest Half-cycle level: +0.09%
d(max): 0.26% Pass
Number of Change Intervals: 1
Highest d(t) for 500 ms: 0.00% Pass
Longest d(t) over 3.30%: 0.00 seconds
'Steady State' definition: >1000 ms below 0.32%
Highest Steady State level: 0.24%
Lowest Steady State level: 0.24%
max d(c) between adjacent: 0.00% Pass
max d(c) between any: 0.00%

Flicker
Long-term Flicker indicator Plt : 0.00
Short-term Flicker indicator Pst :
Plt Interval Pst
1: 0.06
2: 0.06
3: 0.06
4: 0.06
5: 0.06
6: 0.06
7: 0.06
8: 0.06
9: 0.06
10: 0.06
11: 0.06
12: 0.06

Pst classifier: Duration Flicker
0.1% 0.01
0.7% 0.01
1.0% 0.01
1.5% 0.01
2.2% 0.01
3% 0.01
4% 0.01
6% 0.01
8% 0.01
10% 0.01
13% 0.01
17% 0.01
30% 0.01
50% 0.01
80% 0.00

Test engineer: Dora



7.4. Test Photographs






8. Electrostatic Discharge Immunity Test

8.1. Test Procedure

- a. In the case of air discharge testing the climatic conditions shall be within the following ranges:
 - ambient temperature: 15 to 35 ;
 - relative humidity : 30% to 60%;
 - atmospheric pressure : 86 KPa (860 mbar) to 106 KPa (1060 mbar).
- b. Test programs and software shall be chosen so as to exercise all normal modes of operation of the EUT. The use of special exercising software is encouraged, but permitted only where it can be shown that the EUT is being comprehensively exercised.
- c. The test voltage shall be increased from the minimum to the selected test severity level, in order to determine any threshold of failure. The final severity level should not exceed the product specification value in order to avoid damage to the equipment.
- d. The test shall be performed with both air discharge and contact discharge. On reselected points at least 10 single discharges (in the most sensitive polarity) shall be applied on air discharge. On reselected points at least 25 single discharges (in the most sensitive polarity) shall be applied on contact discharge.
- e. For the time interval between successive single discharges an initial value of one second is recommended. Longer intervals may be necessary to determine whether a system failure has occurred.
- f. In the case of contact discharges, the tip of the discharge electrode shall touch the EUT before the discharge switch is operated.
- g. In the case of painted surface covering a conducting substrate, the following procedure shall be adopted :
 - If the coating is not declared to be an insulating coating by the equipment manufacturer, then the pointed tip of the generator shall penetrate the coating so as to make contact with the conducting substrate.
 - Coating declared as insulating by the manufacturer shall only be submitted to the air discharge.
 - The contact discharge test shall not be applied to such surfaces.
- h. In the case of air discharges, the round discharge tip of the discharge electrode shall be approached as fast as possible (without causing mechanical damage) to touch the EUT . After each discharge, the ESD generator (discharge electrode) shall be removed from the EUT. The generator is then retriggered for a new single discharge. This procedure shall be repeated until the discharges are completed. In the case of an air discharge test, the discharge switch, which is used for contact discharge, shall be closed.

8.2. Test Setup for Tests Performed in Laboratory

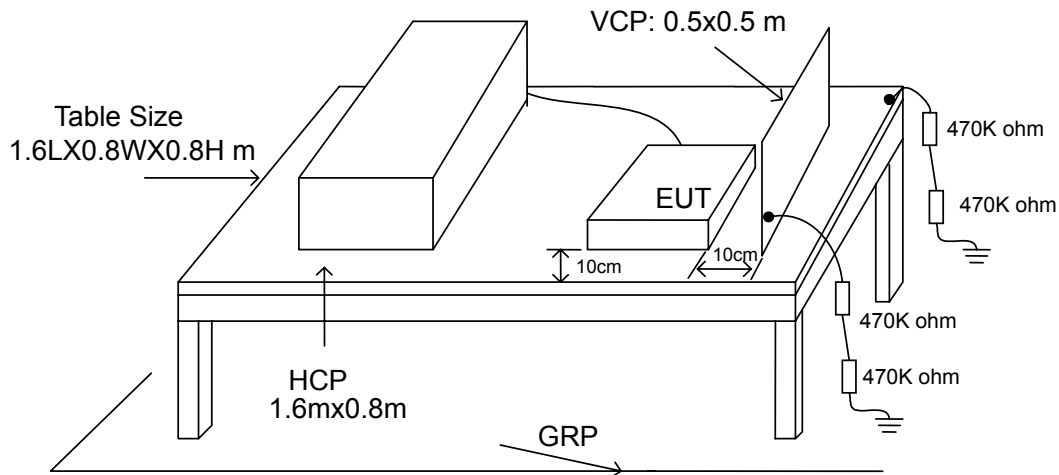

The test setup consists of the test generator, EUT and auxiliary instrumentation necessary to perform DIRECT and INDIRECT application of discharges to the EUT as applicable, in the following manner :

- a. Contact Discharge to the conductive surfaces and to coupling plane;
- b. Air Discharge at insulating surfaces.

The preferred test method is that of type tests performed in laboratories and the only accepted method of demonstrating conformance with this standard. The EUT was arranged as closely as possible to arrangement in final installed conditions.

A ground reference plane was provided on the floor of the test site. It was a metallic sheet (copper or aluminum) of 0.25 mm, minimum thickness; other metallic may be used but they shall have at least 0.65 mm thickness. In the CerpPASS Technology Corp., we provided 1 mm thickness stainless steel ground reference plane. The minimum size of the ground reference plane is 2.5 m x 2.5 m, the exact size depending on the dimensions of the EUT. It was connected to the protective grounding system.

The EUT was arranged and connected according to its functional requirements. A distance of 1m minimum was provided between the EUT and the wall of the lab. and any other metallic structure. In cases where this length exceeds the length necessary to apply the discharges to the selected points, the excess length shall, where possible, be placed non-inductively off the ground reference plane and shall not come closer than 0.2m to other conductive parts in the test setup.

Where the EUT is installed on a metal table, the table was connected to the reference plane via a cable with a 470k ohm resistor located at each end, to prevent a build-up of charge. The test setup was consist a wooden table, 0.8m high, standing on the ground reference plane. A HCP, 1.6 m x 0.8 m, was placed on the table. The EUT and cables was isolated from the HCP by an insulating support 0.5 mm thick. The VCP size, 0.5 m x 0.5 m.



8.3. Test Severity Levels

Contact Discharge		Air Discharge	
Level	Test Voltage (KV) of Contact discharge	Level	Test Voltage (KV) of Air Discharge
1	±2	1	±2
2	±4	2	±4
3	±6	3	±8
4	±8	4	±15
X	Specified	X	Specified

Remark: "X" is an open level.

8.4. Measurement Equipment

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date
ESD SIMULATOR	Schaffner	NSG438	878	2011/06/16	2012/06/15

8.5. Test Result and Data

Final Test Result : **PASS**
 Pass performance criteria : A
 Required performance criteria : B
 Basic Standard : IEC 61000-4-2
 Product Standard : EN 55024
 Test Voltage : ±2 / ±4 / ±8 KV for air discharge,
 : ±2 / ±4 KV for contact discharge
 Temperature : 25°C
 Relative Humidity : 52 %
 Atmospheric Pressure : 1011 hPa
 Test Date : Sep. 24, 2011



Test Mode: Mode 1

	Contact Discharge				Air Discharge					
	25 times / each				10 times / each					
Voltage	2 KV		4 KV		2 KV		4 KV		8 KV	
Point\Polarity	+	-	+	-	+	-	+	-	+	-
HCP	A	A	A	A	---	---	---	---	---	---
VCP	A	A	A	A	---	---	---	---	---	---
Case	A	A	A	A	---	---	---	---	---	---
Screw	A	A	A	A	---	---	---	---	---	---
RJ45 Port	---	---	---	---	A	A	A	A	A	A

Note: "A" means the EUT function is normal working during the test.

Test Mode: Mode 2 ~ Mode 3

	Contact Discharge				Air Discharge					
	25 times / each				10 times / each					
Voltage	2 KV		4 KV		2 KV		4 KV		8 KV	
Point\Polarity	+	-	+	-	+	-	+	-	+	-
HCP	A	A	A	A	---	---	---	---	---	---
VCP	A	A	A	A	---	---	---	---	---	---
Case	A	A	A	A	---	---	---	---	---	---
Screw	A	A	A	A	---	---	---	---	---	---
RJ45 Port	---	---	---	---	A	A	A	A	A	A
RJ45 Port (POE)	---	---	---	---	A	A	A	A	A	A

Note: "A" means the EUT function is normal working during the test.

Test engineer: Dora



8.6. Test Photographs

Mode 1



Mode 2



Rear View



Mode 3





9. Radio Frequency electromagnetic field immunity test

9.1. Test Procedure

- The equipment to be tested is placed in the center of the enclosure on a wooden table. The equipment is then connected to power and signal leads according to pertinent installation instructions.
- The antenna which is enabling the complete frequency range of 80-1000 MHz is placed 3m away from the equipment. The required field strength is determined by placing the field strength meter(s) on top of or directly alongside the equipment under test and monitoring the field strength meter via a remote field strength indicator outside the enclosure while adjusting the continuous-wave to the applicable antennae.
- The test is normally performed with the antenna facing the most sensitive side of the EUT. The polarization of the field generated by the bucolical antenna necessitates testing each position twice, once with the antenna positioned vertically and again with the antenna positioned horizontally. The circular polarization of the field from the log-spiral antenna makes a change of position of the antenna unnecessary.
- At each of the above conditions, the frequency range is swept 80-1000 MHz, pausing to adjust the R.F. signal level or to switch oscillators and antenna. The rate of sweep is in the order of $1.5 \cdot 10^{-3}$ decades/s. The sensitive frequencies or frequencies of dominant interest may be discretely analyzed.

9.2. Test Severity Levels

Frequency Band : 80-1000 MHz	
Level	Test field strength (V/m)
1	1
2	3
3	10
X	Specified
Remark: "X" is an open class.	

9.3. Measurement Equipment

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date
Amplifiers 80-1000MHz/100W	SCHAFFNER	CBA9413B	43510	N/A	N/A
Amplifiers 80-3000MHz/20W	SCHAFFNER	CBA9428	43515	N/A	N/A
Antenna	SCHAFFNER	CBL6141A	4257	N/A	N/A
Power Meter	Boonton	4231A-01	115902	2010/11/30	2011/11/29
Field Probe	HOLADAY	HI-6005	00035824	2011/05/19	2012/05/18
Signal Generator	HP	8648C	3836U02289	2010/11/12	2011/11/11
Power Sensor	Boonton	51011-EMC	33312	2010/11/30	2011/11/29



9.4. Test Result and Data

Final Test Result : **PASS**
 Pass performance criteria : A
 Required performance criteria : A
 Basic Standard : IEC 61000-4-3
 Product Standard : EN 55024
 Frequency Range : 80~1000 MHz
 Temperature : 24°C
 Relative Humidity : 56 %
 Atmospheric Pressure : 1011 hPa
 Test Date : Sep. 24, 2011

Test Mode: The test result of all test modes are the same

Modulation : AM 80% , 1KHz sine wave, Dwell time: 2.9 S				
Frequency Step Size : 1 % of preceding frequency value				
Frequency (MHz)	Antenna Polarization	face	Field strength (V/m)	Result
80~1000	Vertical	Front	3 V/m	A
80~1000	Vertical	Rear	3 V/m	A
80~1000	Vertical	Left	3 V/m	A
80~1000	Vertical	Right	3 V/m	A
80~1000	Horizontal	Front	3 V/m	A
80~1000	Horizontal	Rear	3 V/m	A
80~1000	Horizontal	Left	3 V/m	A
80~1000	Horizontal	Right	3 V/m	A

Note: "A" means the EUT function is normal working during the test.

Test engineer: Dora



9.5. Test Photographs

Mode 1



Mode 2





Mode 3





10. Electrical Fast Transient/ Burst Immunity Test

10.1. Test Procedure

- a. In order to minimize the effect of environmental parameters on test results, the climatic conditions when test is carrying out shall comply with the following requirements:
 - ambient temperature: 15 to 35 ;
 - relative humidity : 45% to 75%;
 - Atmospheric pressure: 86 Kpa (860 mbar) to 106 Kpa (1060 mbar).
- b. In order to minimize the effect of environmental parameters on test results, the electromagnetic environment of the laboratory shall not influence the test results.
- c. The variety and diversity of equipment and systems to be tested make it difficult to establish general criteria for the evaluation of the effects of fast transients/bursts on equipment and systems.
- d. Test on Power Line:
 - The EFT/B-generator was located on the GRP.. The length from the EFT/B-generator to the EUT is not exceeding 1 m.
 - The EFT/B-generator provides the ability to apply the test voltage in a non-symmetrical condition to the power supply input terminals of the EUT.
- e. Test on Communication Lines
 - The coupling clamp is composed of a clamp unit for housing the cable (length more than 3 m), and was placed on the GRP.
 - The coupling clamp provides the ability of coupling the fast transient/bursts to the cable under test.
- f. The test results may be classified on the basic of the operating conditions and the functional specification of the equipment under test, according to the following performance criteria :
 - Normal performance within the specification limits.
 - Temporary degradation or loss of function or performance which is self-recoverable.
 - Temporary degradation or loss of function or performance which requires operator intervention or system reset.
 - Degradation or loss of function which is not recoverable due to damage of equipment (components).

10.2. Test Severity Levels

The following test severity levels are recommended for the fast transient/burst test :

Open circuit output test voltage $\pm 10\%$		
Level	On Power Supply	On I/O signal, data and control line
1	0.5 KV	0.25 KV
2	1.0 KV	0.50 KV
3	2.0 KV	1.00 KV
4	4.0 KV	2.00 KV
X	Specified	Specified

Remark : “ X ” is an open level. The level is subject to negotiation between the user and manufacturer or is specified by the manufacturer.



Test Mode: Mode 2

Pulse : 5/50 ns		Repetition Rate: <u>2.5 kHz</u> above 2.0 kV			
Burst : 15m/300ms		<u>5 kHz</u> below and equal 2.0Kv			
Test time : 1 min/each condition		<u>0.5 kV</u>		<u>1.0 kV</u>	
Voltage/ Mode/ Polarity/ Result/ Phase		+	-	+	-
Power Line	L	A	A	A	A
	N	A	A	A	A
	L-N	A	A	A	A
Signal Line	RJ45 (10M/ 100M)	A	A		

Note: "A" Means the EUT function is normal working during the test.

Test Mode: Mode 3

Pulse : 5/50 ns		Repetition Rate: <u>2.5 kHz</u> above 2.0 kV			
Burst : 15m/300ms		<u>5 kHz</u> below and equal 2.0Kv			
Test time : 1 min/each condition		<u>0.5 kV</u>		<u>1.0 kV</u>	
Voltage/ Mode/ Polarity/ Result/ Phase		+	-	+	-
Signal Line	RJ45 (POE)	A	A		

Note: "A" Means the EUT function is normal working during the test.

Test engineer: Dora



10.5. Test Photographs

Mode 1



Clamp





Mode 2



Clamp





Mode 3





11. Surge Immunity Test

11.1. Test Procedure

- a. Climatic conditions
The climatic conditions shall comply with the following requirements :
 - ambient temperature : 15 to 35
 - relative humidity : 10 % to 75 %
 - atmospheric pressure : 86 kPa to 106 kPa (860 mbar to 1060 mbar)
- b. Electromagnetic conditions
the electromagnetic environment of the laboratory shall not influence the test results.
- c. The test shall be performed according the test plan that shall specify the test set-up with
 - generator and other equipment utilized;
 - test level (voltage/current);
 - generator source impedance;
 - internal or external generator trigger;
 - number of tests : at least five positive and five negative at the selected points;
 - repetition rate : maximum 1/min.
 - inputs and outputs to be tested;
 - representative operating conditions of the EUT;
 - sequence of application of the surge to the circuit;
 - phase angle in the case of AC. power supply;
 - actual installation conditions, for example :
 - AC : neutral earthed,
 - DC : (+) or (-) earthed to simulated the actual earthing conditions.
- d. If not otherwise specified the surges have to be applied synchronized to the voltage phase at the zero-crossing and the peak value of the AC. voltage wave (positive and negative).
- e. The surges have to be applied line to line and line(s) and earth. When testing line to earth, the test voltage has to be applied successively between each of the lines and earth, if there is no other specification.
- f. The test procedure shall also consider the non-linear current-voltage characteristics of the equipment under test. Therefore the test voltage has to be increased by steps up to the test level specified in the product standard or test plan.
- g. All lower levels including the selected test level shall be satisfied. For testing the secondary protection, the output voltage of the generator shall be increased up to the worst-case voltage breakdown level (let-through level) of the primary protection.
- h. If the actual operating signal sources are not available, that may be simulated. Under no circumstances may the test level exceed the product specification. The test shall be carried out according to a test plan.
- i. To find all critical points of the duty cycle of the equipment, a sufficient number of positive and negative test pulses shall be applied. For acceptance test previously unstressed equipment shall be used to the protection devices shall be replaced.

11.2. Test Severity Level

Level	Open-circuit test voltage, ± 10%, KV
1	0.5
2	1.0
3	2.0
4	4.0
X	Specified
NOTE: "X" is an open class. This level can be specified in the product specification.	



11.3. Measurement Equipment

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date
EMC Pro	KeyTek	EMC Pro	0309207	2011/03/24	2012/03/23

11.4. Test Result and Data

Final Test Result : **PASS**
 Pass performance criteria : A
 Required performance criteria : B
 Basic Standard : IEC 61000-4-5
 Product Standard : EN 55024
 Test Voltage : Input AC Power Port L-N -- ± 0.5 kV, ± 1.0 kV
 Temperature : 24°C
 Relative Humidity : 56 %
 Atmospheric Pressure : 1011 hPa
 Test Date : Sep. 24, 2011

Test Mode: Mode 1 & Mode 2

Power Port

Waveform : 1.2/50 μ s(8/20 μ s)		Repetition rate : 60 sec		Time : 5 time/each condition		
Phase Voltage / Mode / Polarity / Result			0°	90°	180°	270°
0.5 kV, 1.0kV	L-N	+	A	A	A	A
		-	A	A	A	A

Note: "A" Means the EUT function is normal working during the test.

Signal Port

RJ45 where normal functioning cannot be achieved because of the impact of the CDN on the EUT.

Test engineer: Dora



11.5. Test Photographs

Mode 1



Mode 2





12. Conduction Disturbances induced by Radio-Frequency Fields

12.1. Test Procedure

- a. The EUT shall be operated within its intended climatic conditions. The temperature and relative humidity should be recorded.
- b. This test method test can be performed without using a sell shielded enclosure. This is because the disturbance levels applied and the geometry of the setups are not likely to radiated a high amount of energy, especially at the lower frequencies. If under certain circumstances the radiated energy is too high, a shielded enclosure has to be used.
- c. The test shall be performed with the test generator connected to each of the coupling and decoupling devices in turn while the other non-excited RF-input ports of the coupling devices are terminated by a 50 ohm load resistor.
- d. The frequency range is swept from 150 KHz to 80 MHz, using the signal levels established during the setting process, and with the disturbance signal 80% amplitude modulated with a 1KHz sign wave, pausing to adjust the RF-signal level or to switch coupling devices as necessary. The rate of sweep shall no exceed 1.5×10^{-3} decades/s. Where the frequency is swept incrementally, the step size shall no exceed 1% of the start and thereafter 1% of the preceding frequency value.
- e. The dwell time at each frequency shall not be less than the time necessary for the EUT to be exercised, and able to respond. Sensitive frequencies e.g. clock frequency (ies) and harmonics or frequencies of dominant interest shall be analyzed separately.
- f. An alternative test procedure may be adopted, wherein the frequency range is swept incrementally, with a step size not exceeding 4% of the start ad thereafter 4% of the preceding frequency value. The test level should be at least twice the value of the specified test level.
- g. In cases of dispute, the test procedure using a step size not exceeding 1% of the start and thereafter 1% of preceding frequency value shall take precedence.
- h. Attempts should be made to fully exercise the EUT during testing, and to fully interrogate all exercise modes selected for susceptibility.
- i. The use of special exercising programs is recommended.
- j. Testing shall be performed according to a Test Plan, which shall be included in the test report.
- k. It may be necessary to carry out some investigatory testing in order to establish some aspects of the test plan.

12.2. Test Severity Levels

Level	Voltage Level (EMF)
1	1 V
2	3 V
3	10 V
x	Specified
NOTE - x is an open class. This level can be specified in the product specification.	

12.3. Measurement Equipment

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date
CS GENERATOR	Schaffner	NSG 2070	1059	2010/10/06	2011/10/05
CDN (M2+M3)	Schaffner	M016	20056	2010/10/05	2011/10/04
CDN	Schaffner	T400	19818	2010/10/05	2011/10/04
EM-CLAMP	Schaffner	KEMZ 801	19793	2010/10/05	2011/10/04



12.5. Test Photographs

Mode 1



Mode 2






Mode 3



13. Power Frequency Magnetic Field Immunity Test

13.1. Test Setup

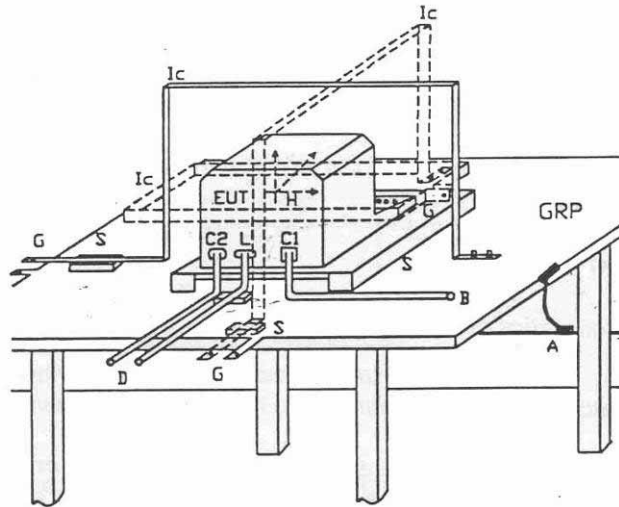

- GPR : Ground plane
- A : Safety earth
- S : Insulating support
- EUT : Equipment under test
- Lc : Induction coil
- E : Earth terminal
- C1 : Power supply circuit
- C2 : Signal circuit
- L : Communication line
- B : To power supply source
- D : To signal source, simulator
- G : To the test generator

13.2. Test Severity Levels

Level	Magnetic field strength (A/m)
1	1
2	3
3	10
4	30
5	100
X ¹⁾	special

NOTE 1 "X" is an open level. This level can be given in the product specification.

13.3. Measurement Equipment

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date
MAGNETIC FIELD GENERATOR	KeyTek	F-1000-4-8-G-125A	N/A	2010/10/05	2011/10/04



13.4. Test Result and Data

Final Test Result : **PASS**
 Pass performance criteria : A
 Required performance criteria : A
 Basic Standard : IEC 61000-4-8
 Product Standard : EN 55024
 Temperature : 24°C
 Relative Humidity : 56 %
 Atmospheric Pressure : 1011 hPa
 Test Date : Sep. 24, 2011

Test Mode: The test result of all test modes are the same

Power Frequency Magnetic Field : <u>50</u> Hz, <u>1</u> A/m		
Coil Orientation	Testing duration	Results
X-axis	1.0 Min	A
Y-axis	1.0 Min	A
Z-axis	1.0 Min	A

Note: "A" Mean the EUT function is normal working during the test.

Test engineer: Yora



13.5. Test Photographs

Mode 1



Mode 2





Mode 3





14. Voltage Dips and Voltage Interruptions Immunity Test Setup

14.1. Test Conditions

1. Source voltage and frequency : 230V / 50Hz, Single phase.
2. Test of interval : 10 sec.
3. Level and duration : Sequence of 3 dips/interrupts.
4. Voltage rise (and fall) time : 1 ~ 5 μ s.
5. Test severity :

Voltage dips and Interrupt reduction (%)	Test Duration (period)
>95%	250
30%	25
>95%	0.5

14.2. Measurement Equipment

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date
EMC Pro	KeyTek	EMC Pro	0309207	2011/03/24	2012/03/23



14.3. Test Result and Data

Final Test Result : **PASS**
 Pass performance Criteria : B for voltage interruption, A for voltage dips
 Required performance Criteria : C for voltage interruption, B/C for voltage dips
 Basic Standard : IEC 61000-4-11
 Product Standard : EN 55024
 Temperature : 24°C
 Relative Humidity : 56 %
 Atmospheric Pressure : 1011 hPa
 Test Date : Sep. 24, 2011

Test Mode: Mode 1

Voltage(UT): AC <u>230</u> V <u>50</u> Hz Interval(s) : <u>10s</u> Times : <u>3</u>				
Test mode	Test level reduction %	Durations (period)	Phase / Result	
			0°	180°
Voltage interruptions	>95%	250	B	B
Voltage dips	30%	25	A	A
	>95%	0.5	A	A

Note: "A" Means the EUT function is normal working during the test.

"B" Means the EUT function is affect during the test, but it can be recover automatically, after a while.

Test engineer: Dora



14.4. Test Photographs

Mode 1





Appendix A. Photographs of EUT





