



22x (ICR) Auto Focus Zoom Camera



Features

- 22x optical zoom, 16x digital zoom
- Day & Night (option: IR-Cut filter Removable, ICR)
- On Screen Display (OSD) set-up menu
- Camera control via RS-485
- Support functions: AI, AWB, AGC, BLC, FL, Positive / Negative
- Support YOKO / PELCO D&P / LG protocol

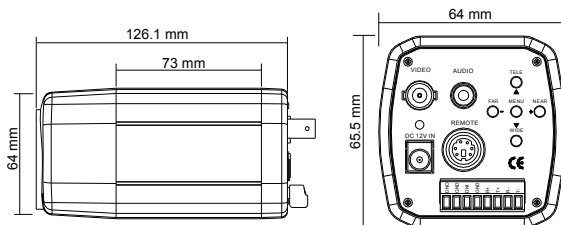

Option :



RYK-8340
Wire Remote Controller



RYK-8505L
IR Housing

Model No.	RYK-AF201A	RYK-AF202A	RYK-AF203A	RYK-AF204A
Image Device	1/4" Color Sony Super HAD	1/4" Color Sony Super HAD (Hi-Res.)	1/4" Color Sony Super HAD	1/4" Color Sony EX-View HAD (Hi-Res.)
Picture Elements	NTSC:510x492, PAL:500x582	NTSC:768x494, PAL:752x582	NTSC:510x492, PAL:500x582	NTSC:768x494, PAL:752x582
Resolution	330 TVL	470 TVL	330 TVL	470 TVL
Min. Illumination	0.1 Lux / F1.6	0.2 Lux / F1.6	0.03 Lux (Night / BW), 0.08 Lux (Day / Color) / F1.6	0.05 Lux (Night / BW), 0.12 Lux (Day / Color) / F1.6
S/N Ratio	More than 48dB			
Electronic Shutter	NTSC:1/60~1/30,000 , PAL:1/50~1/30,000			
Flickerless Mode	On / Off (NTSC:1/100, PAL:1/120)			
Iris Control	Auto / Manual			
Lens Furnished	22x Auto Focus Zoom (3.9~85.8mm / F1.6~3.7)		22x (ICR) Auto Focus Zoom (3.9~85.8mm / F1.6~3.7)	
Digital Zoom Ratio	Basic 16x (Total Zoom Ratio 352x), 2x~16x variable			
Mini. Shutting Distance	0.01m (WIDE), 1.0m (TELE)			
Camera Control	RS-485 / RS-422 (option: RS-232)			
Remote Control	6-pin Circular Connect: Zoom, Focus, A/D key, DC12V IN			
Key Control	Tele (Up), Wide (Down), Near (+), Far (-), Menu			
Protocol	YOKO / PELCO D&P / LG			
Zoom Speed	5 / 7 / 9 sec mode			
Zoom / Focus Preset	128 preset points			
Focus Mode	Auto / Manual / Push Auto			
On Screen Display	Set-up menu			
Negative / Positive	On / Off			
Day& Night (ICR)	On / Off		AE / Sensor / Day / Night / External	
Color Control	On / Off		-	
Brightness Control	Manual			
Wide Burst	On / Off			
White Balance	Auto / Hue / Indoor / Outdoor / Manual / Push Auto			
Gain Control	Auto / Manual			
Back Light Comp.	On / Auto (Center / Up / Down / Left / Right) / Super / Off			
Sync. System	Internal / External Line Lock			
Video Output	1 Vp-p / 75 Ohms			
Power Supply	DC12V ± 10%			
Power Consumption	340mA max.			
Operating Temp.	-10°C ~ 50°C			