

# miniVigor128

## USB-based ISDN TA

Version of miniVigor128: for Windows ; for Mac version

Minimum requirement of miniVigor128 For Windows®

E-mail

Fax


Video Conferencing

Web Surfing

File Transfer

64K/128K via ISDN


For Windows

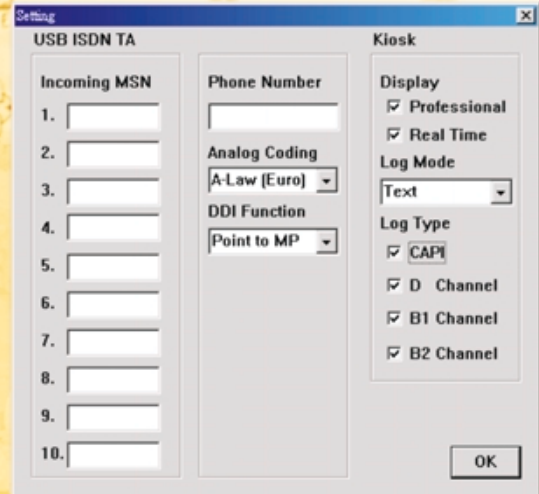

- USB ports on the computer
- Personal computer with a Pentium/90 MHz or higher processor running Microsoft® Windows® 95 OSR 2.1/2.5, or Windows® 98, or Windows® Me, or Windows® 2000 operating system.
- Windows® 95 needs Dial-Up Networking version 1.2, or later
- 32 MB of RAM(64 MB recommended), Hard-disk space required: 5 MB free disk space
- CD-ROM Drive
- Audio card (for the answering machine), VGA or higher-resolution monitor

Minimum requirement of miniVigor128 For Mac®

For Mac

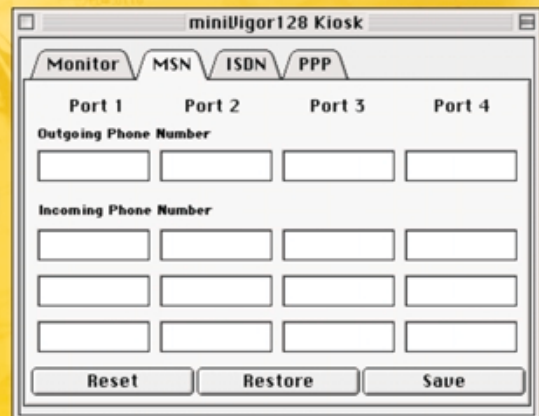

- Mac OS8.6, or 9.0, or 9.0.4.
- iMac, or New Power Mac G3, or New Power Mac G4, or New PowerBookG3 400 series and USB ports on the Apple Power PC
- 32 MB of RAM(64 MB recommended), Hard-disk space required: 5 MB free disk space
- CD-ROM Drive

# DrayTek

# miniVigor128

## USB-based ISDN TA

E-mail

Fax

Video Conferencing

Web Surfing

File Transfer

64K/128K via ISDN

### Features and Benefits of miniVigor128 USB-based ISDN TA:

- Easy installation through "Plug&Play"
- Full 128Kbps-bandwidth optimization over a single ISDN line to the corporate Intranet and Internet for web surfing, videoconferencing and file transferring
- Compatible with major service providers which adopts the major ISDN protocols such as PPP, V.120, V.110, X.75&MLPPP)
- Supports Data/Fax/Voice via communication software
- Powered from the USB port without the need of using power supply

### Application of miniVigor128:

- E-mail
- Fax
- Web surfing
- File Transfer
- Videoconferencing
- Voice feature via the optional communication software

### Technical Specifications

External ISDN adapter with USB port.

ISDN port : 1 x RJ45 connector for S/T interface.

User port : 1 x USB cable for computer.

ISDN protocol: Euro ISDN DSS1.

Network Interface: Basic Rate Access (2B+D), S/T interface or U interface.

Dimensions(cm): L 7.9 cm x W 4.7 cm x H 2.2 cm

Power consumption: maximum 0.25 Watt via USB port.

### Optional Communications software:\*\*

Answering machine

Fax receiving and sending

Eurofile transfer

\*\*Buy option in some countries



For Windows users



For Mac users



ISDN/Internet

Type approvals: fulfills the requirements of EU directives:  
Warranty: DrayTek guarantees miniVigor128 to be in good working condition for 2 years  
Support: via local distribution channels, DrayTek Web, Internet, and faxline

# DrayTek

Taiwan, R.O.C.

www.draytek.com.tw

Tel: 886 3 516 0018

Fax: 886 3 516 0019

email : info@draytek.com.tw

