

DynaHawk™ W1 Series

Full HD Multiple Streams Micro Dome IP Camera




The Full HD Multiple Streams Compact Fixed Dome IP Camera offer high definition resolution at full frame rate, progressive scan technology, and edge enhancement for outstanding picture clarity. ONVIF (Profile S) compliance ensures hassle-free, flexible system integration.

This model capable of serving real-time streaming and makes image quality more smoothly. In addition to MJPEG real time streaming, this camera develops H.264 codec to apply for high resolution digital broadcast. Also 3DNR (Digital Noise Reduction) and proprietary SPQ (Smart Picture Quality) provide significant storage savings without sacrificing image quality in low light.

W1 is a cost-effective surveillance solution for installations that require excellent picture quality at minimal bandwidth. Their simple yet solid, low-profile design is ideal for discreet installations where space is limited. Installation and setup is simple, quick and easy, with a factory-focused lens and a simple PoE connection.

■ Key Features

- Progressive Scan CMOS Sensor
 - Quad Stream Compression - H.264 Baseline / Main / High Profile + MJPEG
 - Multi-language Support
 - Tampering Alarm
 - Wide Dynamic Range
 - Motion Detection
 - Privacy Masks
 - 3D Noise Reduction / 2D Noise Reduction
 - Vertical View Mode (Image rotation by 90 degrees)
 - Network Failure Detection
 - Weatherproof Dongle Cable*
 - Weatherproof (IP66 International)*
 - microSD Support
 - ONVIF Support
- (*) Optional

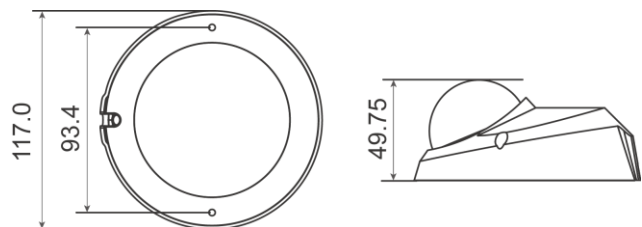

DynaHawk™ W1 Series - Micro Dome IP Camera

Camera		W3S1-1	W3A2-1
Image Sensor		1/2.8" Sony Progressive CMOS	1/2.5" Progressive CMOS
Effective Pixels		1920(H) x 1080(V)	2592(H) x 1944(V)
Minimum Illumination		TBD	TBD
White Balance		Manual / AWB / ATW	
Shutter Speed		1 ~ 1/10000 sec.	
Lens			
Focal Length		3.6 mm	6 mm
F Number		F 1.8	F 1.6
FOV		71.8°	57°
Operation			
Multiple Languages		English / French / German / Italian / Japanese / Korean / Portuguese / Russian / Simplified Chinese / Spanish / Traditional Chinese	
Image Setting	Backlight Compensation	On/Off	
	White Balance	AWB / ATW / Manual / One Push	
	Noise Reduction	3D	On/Off
	Wide Dynamic Range	On/Off	
	Privacy Mask	On/Off	
	Brightness	Manual	
	Exposure	Auto / Manual	
	Sharpness	Manual	
	Contrast	Manual	
	Saturation	Manual	
	Hue	Manual	
	Digital Zoom	Support	
	Motion Detection	On / Off	
	Privacy Mask Type	Color	
	Tampering Alarm	On / Off	
	Digital Image Stabilization	On/Off	
Audio	One-way Audio*	Mic in	
	Compression	G.711/G.726	
Network			
Interface		RJ-45, 10/100 Mbps Ethernet	
Video Compression		H.264 (MPEG-4 Part 10/AVC) / MJPEG	
Video Streaming	Dual Streams	H.264 + MJPEG / H.264 + H.264	
	Quad Streams	H.264 x 4 / H.264 x 3 + MJPEG	
Video Resolution		H.264- Full HD 1080P / SXGA / HD 720P / XGA / SVGA / D1 / VGA / CIF MJPEG- Full HD 1080P / SXGA / HD 720P / XGA / SVGA / D1 / VGA / CIF	
Frame Rate		Dual Streams : 1080p (30/25 fps) + D1 (30/25 fps)	
Protocol		IPv4/v6, TCP/IP, UDP, RTP, RTSP, HTTP, HTTPS, ICMP, FTP, SMTP, DHCP, PPPoE, UPnP, IGMP, SNMP, QoS, ONVIF, ARP	
Security		HTTPS / IP Filter / IEEE 802.1X	
Event Notification		HTTP / FTP / SMTP	
Micro SD*		microSDHC 32GB support	
Supported Web Browser		Internet Explorer (6.0+) / Chrome / Firefox / Safari	
User Account		20	
Password Levels		User and Administrator	
Mechanical			
Lens Mounting		M12 Board Lens	
Connectors	Ethernet	RJ-45	
General			
Operating Temperature		-10°C ~ 50°C (14° ~ 122° F)	
Humidity		10% ~ 90%, No Condensation	
Weatherproof Standard		Rugged Type- IP66	
Dimension		Ø 110.2 x 47.7 mm (Ø 4.3 x 1.9 in.)	
Weight		180 g (0.40 lb)	
Power Source		PoE	
Power Consumption		3.5 W	
Regulatory		CE / FCC / RoHS / IP66 (Outdoor)	

* mark for optional items
Product specification and availability are subject to change without notice.



DYNACOLOR, INC.
No. 116, Jou Tz Street, Neihu, Taipei 114, Taiwan
TEL: (886)2-2659-8898 FAX: (886)2-2659-8868
<http://www.dynacolor.com.tw> info@dynacolor.com.tw