


CUSTOMER: Drytek

CUST P/N:

W.F P/N:

DRW NO: CN50(M)-CN50(F)-001G

SAMPLE NO: SR-0013

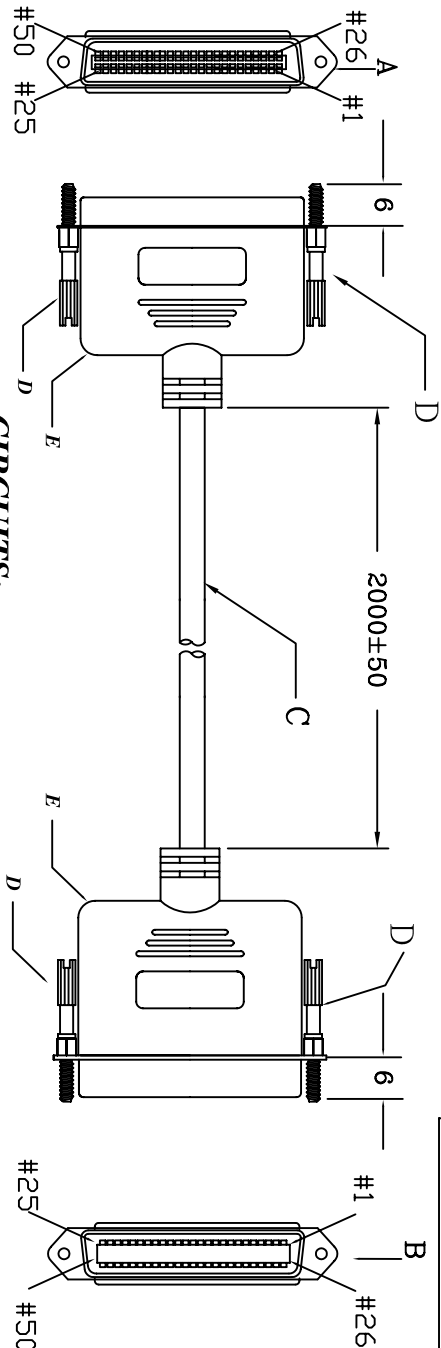

MATERIAL:

- A:CCN-50(MALE) : INSULATOR COLOR : BLUE
- BACK SIDE OF HOLE ADD A NUT
- B:CCN-50(FEMALE) : INSULATOR COLOR : BLUE
- BACK SIDE OF HOLE ADD A NUT
- C:UL 2464 26#×25P+A+D OD:12mm
- L=2000mm COLOR : 10082 BEIGE
- D:SCREW : JH-050-360A-NI
- E:MOLDING COLOR : 10082 BEIGE
- (ABOVE-MENTIONED MATERIALS ARE CONFORM TO ENVIRONMENTAL PROTECTION REQUESTS)


TEST CONDITIONS :

- 1. 100% CONTACT TEST
- 2. INSULATION RESISTANCE : ≥10MΩ /DC 300V
- 3. CONTACT RESISTANCE : ≤10mΩ /DC 300V
- 4. DELAY TIME : 0.1SEC


WELL FORCE ELECTRONIC

TEL: (02) 2906-6803 FAX: (02) 2906-6805

CIRCUITS:

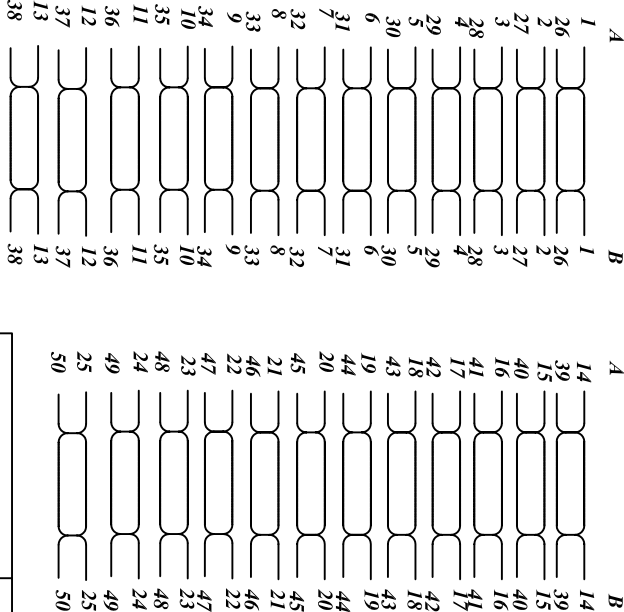

PACKAGE

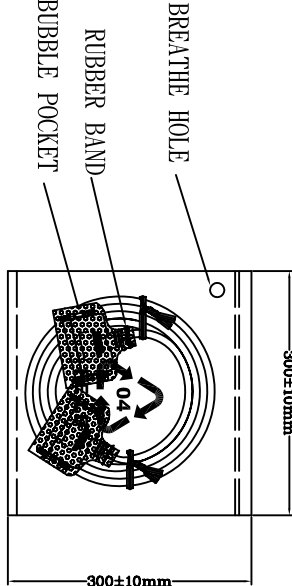

PACKAGE REQUESTS:

- 1>. CN50P CONNECTORS MUST PACKAGE BY 10×12cm RUBBER POCKETS
- 2>. MUST PACKAGE BY PE-LD POCKET
- 3>. ENTWINE CIRCLES: UP 4 AND DOWN 3

APPR.	CHECKED	DRAWED	REVISIONS: A
		Rick	UNIT: mm
			DATE: SEP.26.2005