



CERTIFICATE

Issued Date: Feb. 21, 2011
Report No. : 112169R-ITCEP11V04

This is to certify that the following designated product

Product : Network Camera
Trade name : VIVOTEK
Model Number : IP8132
Company Name : VIVOTEK INC.

This product, which has been issued the test report listed as above in QuieTek Laboratory, is based on a single evaluation of one sample and confirmed to comply with the requirements of the following EMC standard.

EN 55022: 2006+A1: 2007 EN 55024: 1998+A1: 2001+A2: 2003
EN 61000-3-2: 2006+A2: 2009
EN 61000-3-3: 2008
AS/NZS CISPR 22: 2009

TEST LABORATORY

Vincent Lin / Manager



Test Report

Product Name : Network Camera

Model No. : IP8132

Applicant : VIVOTEK INC.

Address : 6F, No. 192, Lien-Cheng Rd., Chung-Ho, New Taipei City,
235, Taiwan, R.O.C.

Date of Receipt : 2011/02/14

Issued Date : 2011/02/21

Report No. : 112169R-ITCEP11V04

Report Version : V1.0

The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF, NVLAP or any agency of the Government.

The test report shall not be reproduced except in full without the written approval of QuieTek Corporation.



Declaration of Conformity

We herewith confirm the following designated products to comply with the requirements set out in the Council Directive on the approximation of the laws of the Member States relating to Electromagnetic Compatibility Directive (2004/108/EC) with applicable standards listed below.

Product : Network Camera
Trade name : VIVOTEK
Model Number : IP8132
Applicable Harmonized : EN 55022: 2006+A1: 2007, Class B
Standards under Directive EN 55024: 1998+A1: 2001+A2: 2003
2004/108/EC EN 61000-3-2: 2006+A2: 2009, Class A
EN 61000-3-3: 2008

Company Name : _____
Company Address : _____
Telephone : _____ Facsimile : _____

Person in responsible for marking this declaration:

_____ Name (Full Name)	_____ Title/ Department
_____ Date	_____ Legal Signature



Statement of Conformity

This statement is to certify that the designated product below.

Product : Network Camera
Trade name : VIVOTEK
Model Number : IP8132
Company Name : VIVOTEK INC.
Applicable Standards : EN 55022: 2006+A1: 2007, Class B
EN 55024: 1998+A1: 2001+A2: 2003
EN 61000-3-2: 2006+A2: 2009, Class A
EN 61000-3-3: 2008

One sample of the designated product has been tested and evaluated in our laboratory to find in compliance with the applicable standards above. The issued test report(s) show(s) it in detail.

Report Number : 112169R-ITCEP11V04



The verification is based on a single evaluation of one sample of above-mentioned products. It does not imply an assessment of the whole production and does not permit the use of the test lab. Logo.

Test Report Certification

Issued Date : 2011/02/21

Report No. : 112169R-ITCEP11V04



Product Name : Network Camera
Applicant : VIVOTEK INC.
Address : 6F, No. 192, Lien-Cheng Rd., Chung-Ho, New Taipei City,
235, Taiwan, R.O.C.
Manufacturer : VIVOTEK INC.
Model No. : IP8132
EUT Rated Voltage : AC 100-240V, 50-60Hz
EUT Test Voltage : AC 230 V / 50 Hz
Trade Name : VIVOTEK
Applicable Standard : EN 55022: 2006+A1: 2007, Class B
EN 55024: 1998+A1: 2001+A2: 2003
EN 61000-3-2:2006+A2: 2009
EN 61000-3-3:2008
AS/NZS CISPR 22: 2009
Test Result : Complied
Performed Location : Quietek Corporation (Linkou Laboratory)
No. 5-22, Rueishu Keng, Linkou Dist., New Taipei City
24451, Taiwan. R.O.C.
TEL:+866-2-8601-3788 / FAX:+886-2-8601-3789

Documented By : Jinn Chen
(Adm. Specialist / Jinn Chen)

Reviewed By : JoJolee jung
(Assistant Engineer / JoJolee Jung)

Approved By : [Signature]
(Manager / Vincent Lin)

Laboratory Information

We , **QuieTek Corporation**, are an independent EMC and safety consultancy that was established the whole facility in our laboratories. The test facility has been accredited/accepted (audited or listed) by the following related bodies in compliance with ISO 17025, EN 45001 and specified testing scopes:

Taiwan R.O.C.	:	BSMI, NCC, TAF
Germany	:	TUV Rheinland
Norway	:	Nemko, DNV
USA	:	FCC, NVLAP
Japan	:	VCCI

The related certificate for our laboratories about the test site and management system can be downloaded from QuieTek Corporation's Web Site : <http://www.quietek.com/tw/ctg/cts/accreditations.htm>

The address and introduction of QuieTek Corporation's laboratories can be founded in our Web site : <http://www.quietek.com/>

If you have any comments, Please don't hesitate to contact us. Our contact information is as below:

HsinChu Testing Laboratory :

No.75-2, 3rd Lin, Wangye Keng, Yonghxing Tsuen, Qionglin Shiang, Hsinchu County 307, Taiwan, R.O.C.
 TEL:+886-3-592-8858 / FAX:+886-3-592-8859 E-Mail : service@quietek.com



LinKou Testing Laboratory :

No. 5-22, Rueishu Keng, Linkou Dist., New Taipei City 24451, Taiwan. R.O.C.
 TEL : 886-2-8601-3788 / FAX : 886-2-8601-3789 E-Mail : service@quietek.com



Suzhou (China) Testing Laboratory :

No. 99 Hongye Rd., Suzhou Industrial Park Loufeng Hi-Tech Development Zone., Suzhou,China.
 TEL : +86-512-6251-5088 / FAX : +86-512-6251-5098 E-Mail : service@quietek.com



TABLE OF CONTENTS

Description	Page
1. General Information	7
1.1. EUT Description.....	7
1.2. Mode of Operation	8
1.3. Tested System Details	9
1.4. Configuration of Tested System	9
1.5. EUT Exercise Software.....	10
2. Technical Test	11
2.1. Summary of Test Result.....	11
2.2. List of Test Equipment	12
2.3. Measurement Uncertainty.....	15
2.4. Test Environment.....	17
3. Conducted Emission (Main Terminals).....	18
3.1. Test Specification	18
3.2. Test Setup.....	18
3.3. Limit	18
3.4. Test Procedure	19
3.5. Deviation from Test Standard.....	19
3.6. Test Result	20
3.7. Test Photograph	32
4. Conducted Emissions (Telecommunication Ports).....	34
4.1. Test Specification	34
4.2. Test Setup.....	34
4.3. Limit	34
4.4. Test Procedure	35
4.5. Deviation from Test Standard.....	35
4.6. Test Result	36
4.7. Test Photograph	48
5. Radiated Emission	50
5.1. Test Specification	50
5.2. Test Setup.....	50
5.3. Limit	51
5.4. Test Procedure	52
5.5. Deviation from Test Standard.....	52
5.6. Test Result.....	53
5.7. Test Photograph	61
6. Harmonic Current Emission	64

6.1.	Test Specification	64
6.2.	Test Setup.....	64
6.3.	Limit.....	64
6.4.	Test Procedure	66
6.5.	Deviation from Test Standard.....	66
6.6.	Test Result.....	67
6.7.	Test Photograph	71
7.	Voltage Fluctuation and Flicker.....	72
7.1.	Test Specification.....	72
7.2.	Test Setup.....	72
7.3.	Limit.....	72
7.4.	Test Procedure	73
7.5.	Deviation from Test Standard.....	73
7.6.	Test Result.....	74
7.7.	Test Photograph	76
8.	Electrostatic Discharge	77
8.1.	Test Specification.....	77
8.2.	Test Setup.....	77
8.3.	Limit.....	77
8.4.	Test Procedure	78
8.5.	Deviation from Test Standard.....	78
8.6.	Test Result.....	79
8.7.	Test Photograph	81
9.	Radiated Susceptibility	82
9.1.	Test Specification.....	82
9.2.	Test Setup.....	82
9.3.	Limit.....	82
9.4.	Test Procedure	83
9.5.	Deviation from Test Standard.....	83
9.6.	Test Result.....	84
9.7.	Test Photograph	86
10.	Electrical Fast Transient/Burst.....	87
10.1.	Test Specification.....	87
10.2.	Test Setup.....	87
10.3.	Limit.....	87
10.4.	Test Procedure	88
10.5.	Deviation from Test Standard.....	88
10.6.	Test Result.....	89

10.7.	Test Photograph	91
11.	Surge	93
11.1.	Test Specification	93
11.2.	Test Setup.....	93
11.3.	Limit.....	93
11.4.	Test Procedure	94
11.5.	Deviation from Test Standard.....	94
11.6.	Test Result.....	95
11.7.	Test Photograph	97
12.	Conducted Susceptibility	98
12.1.	Test Specification	98
12.2.	Test Setup.....	98
12.3.	Limit.....	99
12.4.	Test Procedure	99
12.5.	Deviation from Test Standard.....	99
12.6.	Test Result.....	100
12.7.	Test Photograph	102
13.	Power Frequency Magnetic Field	104
13.1.	Test Specification	104
13.2.	Test Setup.....	104
13.3.	Limit.....	104
13.4.	Test Procedure	104
13.5.	Deviation from Test Standard.....	104
13.6.	Test Result.....	105
13.7.	Test Photograph	107
14.	Voltage Dips and Interruption.....	108
14.1.	Test Specification	108
14.2.	Test Setup.....	108
14.3.	Limit.....	108
14.4.	Test Procedure	109
14.5.	Deviation from Test Standard.....	109
14.6.	Test Result.....	110
14.7.	Test Photograph	112
15.	Attachment	113
	EUT Photograph.....	113

1. General Information

1.1. EUT Description

Product Name	Network Camera
Trade Name	VIVOTEK
Model No.	IP8132

Component	
Power Adapter (1)	MFR: JENTEC, M/N: CF1205-E Input: AC 100-240V, 50-60Hz, 0.4A Output: DC 5V, 2A Cable Out: Non-Shielded, 1.6m
Power Adapter (2)	MFR: JENTEC, M/N: AF1205-B Input: AC 100-240V, 50-60Hz, 0.3A Output: DC 5V, 2.0A Cable Out: Non-Shielded, 1.8m

1.2. Mode of Operation

Quietek has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:


Pre-Test Mode	
Mode 1: CF1205-E, Normal Operation Mode 2: AF1205-B, Normal Operation	
Final Test Mode	
Emission	Mode 1: CF1205-E, Normal Operation Mode 2: AF1205-B, Normal Operation
Immunity	Mode 1: CF1205-E, Normal Operation Mode 2: AF1205-B, Normal Operation

1.3. Tested System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) ssare:

Product	Manufacturer	Model No.	Serial No.	Power Cord
1 Notebook PC	DELL	PP04X	C8YYM1S	Non-Shielded, 1.2m

1.4. Configuration of Tested System

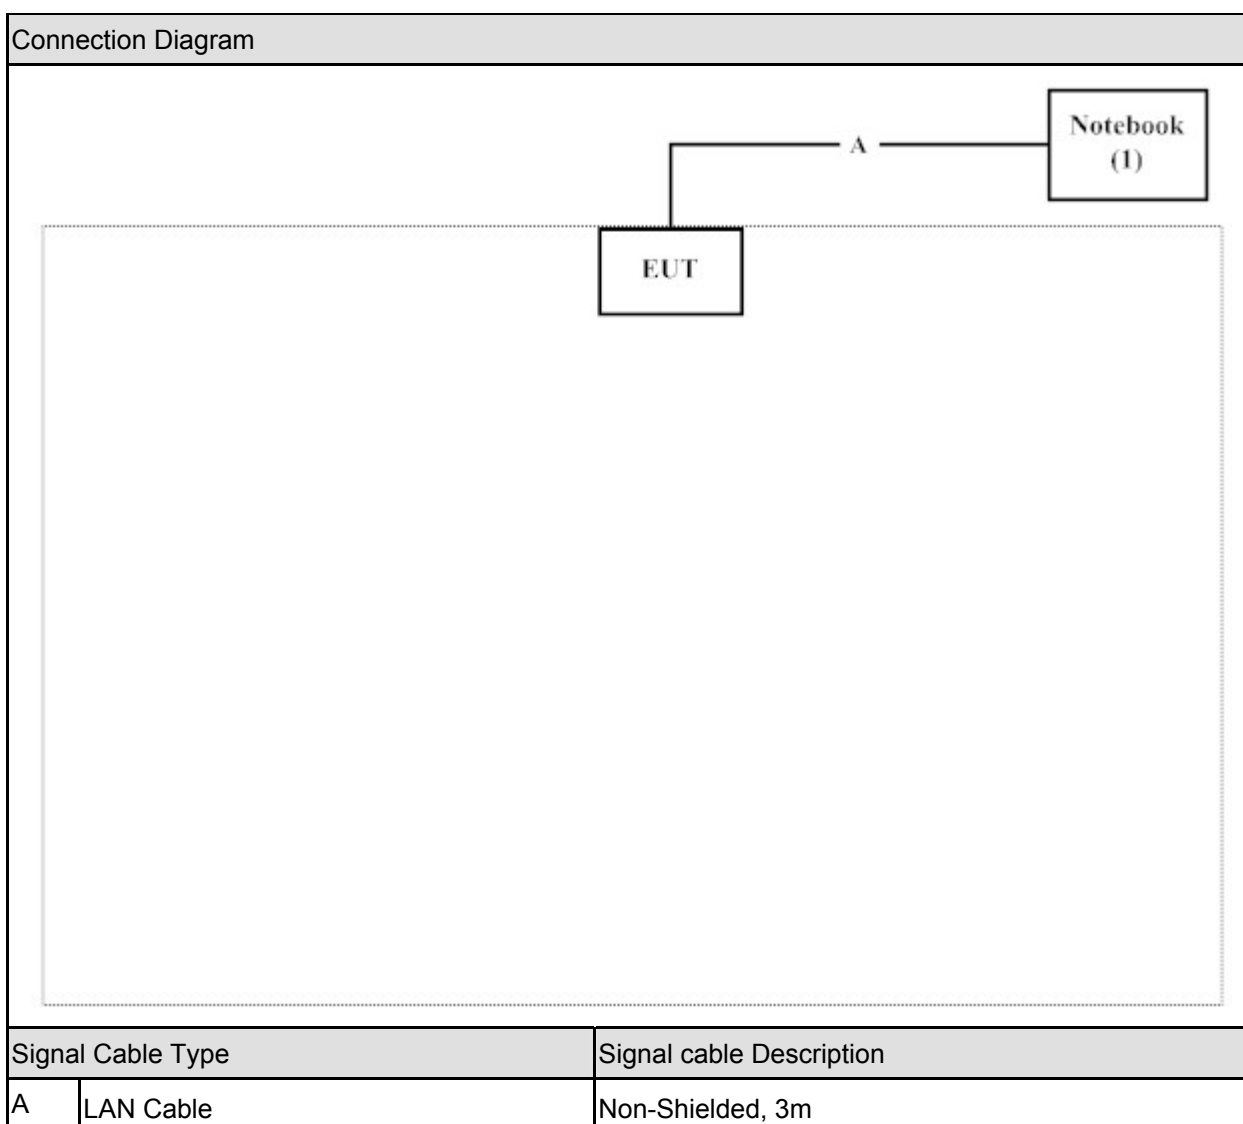

1.5. EUT Exercise Software

1	Setup the EUT and simulators as shown on 1.4.
2	Turn on the power of all equipment.
3	The EUT will start to operate and display the video figure from the signal source.
4	The EUT will display “video figure” on monitor.
5	Repeat the above procedure (3) to (4).

2. Technical Test

2.1. Summary of Test Result

- No deviations from the test standards
 Deviations from the test standards as below description:

Emission			
Performed Item	Normative References	Test Performed	Deviation
Conducted Emission	EN 55022: 2006+A1: 2007 AS/NZS CISPR 22: 2009	Yes	No
Impedance Stabilization Network	EN 55022: 2006+A1: 2007 AS/NZS CISPR 22: 2009	Yes	No
Radiated Emission	EN 55022: 2006+A1: 2007 AS/NZS CISPR 22: 2009	Yes	No
Power Harmonics	EN 61000-3-2:2006+A2: 2009	Yes	No
Voltage Fluctuation and Flicker	EN 61000-3-3:2008	Yes	No

Immunity			
Performed Item	Normative References	Test Performed	Deviation
Electrostatic Discharge	IEC 61000-4-2: 2008	Yes	No
Radiated susceptibility	IEC 61000-4-3: 2008	Yes	No
Electrical fast transient/burst	IEC 61000-4-4: 2004	Yes	No
Surge	IEC 61000-4-5: 2005	Yes	No
Conducted susceptibility	IEC 61000-4-6: 2008	Yes	No
Power frequency magnetic field	IEC 61000-4-8: 2009	Yes	No
Voltage dips and interruption	IEC 61000-4-11: 2004	Yes	No

2.2. List of Test Equipment

Conducted Emission / SR1

Instrument	Manufacturer	Type No.	Serial No	Cal. Date
EMI Test Receiver	R&S	ESCS 30	100366	2010/10/29
LISN	R&S	ENV4200	833209/007	2010/08/14
LISN	R&S	ENV216	100085	2011/02/17
Pulse Limiter	R&S	ESH3-Z2	357.88.10.52	2010/09/10

Impedance Stabilization Network / SR1

Instrument	Manufacturer	Type No.	Serial No	Cal. Date
Capacitive Voltage Probe	Schaffner	CVP2200A	18331	2010/11/16
EMI Test Receiver	R&S	ESCS 30	100366	2010/10/29
LISN	R&S	ENV216	100085	2011/02/17
LISN	R&S	ENV4200	833209/007	2010/08/14
Pulse Limiter	R&S	ESH3-Z2	357.88.10.52	2010/09/10
RF Current Probe	FCC	F-65 10KHz~1GHz	198	2010/11/13
BALANCED TELECOM ISN	FCC	FCC-TLISN-T2-02	20316	2010/11/22
BALANCED TELECOM ISN	FCC	FCC-TLISN-T4-02	20317	2010/11/22
BALANCED TELECOM ISN	FCC	FCC-TLISN-T8-02	20319	2010/11/22

Radiated Emission / Site2

Instrument	Manufacturer	Type No.	Serial No	Cal. Date
Bilog Antenna	Schaffner Chase	CBL6112B	2921	2010/08/02
Broadband Horn Antenna	Schwarzbeck	BBHA9170	209	2010/10/27
EMI Test Receiver	R&S	ESCS 30	100123	2010/05/27
Horn Antenna	Schwarzbeck	BBHA9120D	305	2010/08/26
Pre-Amplifier	QTK	N/A	N/A	2010/08/01
Spectrum Analyzer	Advantest	R3162	01700040	2010/11/18

Radiated Emission / 9x6x6 Chamber

Instrument	Manufacturer	Type No.	Serial No	Cal. Date
Spectrum Analyzer (9K-26.5GHz)	Agilent	E4408B	MY45102743	2010/08/12
Horn Antenna	Schwarzbeck	9120D	576	2010/10/21
Pre-Amplifier	Quietek	AP-180C	CHM/071920	2010/08/01

Power Harmonics / SR3

Instrument	Manufacturer	Type No.	Serial No	Cal. Date
AC Power Source(Harmonic)	Schaffner	NSG 1007	HK54148	2010/09/06
IEC1000-4-X Analyzer(Flicker)	Schaffner	CCN 1000-1	X7 1887	2010/09/06

Voltage Fluctuation and Flicker / SR3

Instrument	Manufacturer	Type No.	Serial No	Cal. Date
AC Power Source(Harmonic)	Schaffner	NSG 1007	HK54148	2010/09/06
IEC1000-4-X Analyzer(Flicker)	Schaffner	CCN 1000-1	X7 1887	2010/09/06

Electrostatic Discharge / SR6

Instrument	Manufacturer	Type No.	Serial No	Cal. Date
ESD Simulator System	Noiseken	TC-815R	ESS0929097	2010/08/30
Horizontal Coupling Plane(HCP)	Quietek	HCP AL50	N/A	N/A
Vertical Coupling Plane(VCP)	Quietek	VCP AL50	N/A	N/A

Radiated susceptibility / CB5

Instrument	Manufacturer	Type No.	Serial No	Cal. Date
AF-BOX	R&S	AF-BOX ACCUST	100007	N/A
Audio Analyzer	R&S	UPL 16	100137	2010/04/22
Biconilog Antenna	EMCO	3149	00071675	N/A
Directional Coupler	A&R	DC 6180	22735	N/A
Dual Microphone Supply	B&K	5935	2426784	2010/04/22
Mouth Simulator	B&K	4227	2439692	2010/04/22
Power Amplifier	A&R	30S1G3	309453	N/A
Power Amplifier	A&R	100W10000M7	A285000010	N/A
Power Amplifier	SCHAFFNER	CBA9413B	4020	N/A
Power Amplifier	AR	75A250A	0325371	N/A
Power Meter	R&S	NRVD(P.M)	100219	2010/04/22
Pre-Amplifier	A&R	150A220	23067	N/A
Probe Microphone	B&K	4182	2278070	2010/04/22
Signal Generator	R&S	SML03	103330	2010/04/21

Electrical fast transient/burst / SR3

Instrument	Manufacturer	Type No.	Serial No	Cal. Date
TRANSIENT TEST SYSTEM	EMC PARTNET	TRA2000IN6	1138	2010/12/09

Surge / SR3

Instrument	Manufacturer	Type No.	Serial No	Cal. Date
TRANSIENT TEST SYSTEM	EMC PARTNET	TRA2000IN6	1138	2010/12/09

Conducted susceptibility / SR6

Instrument	Manufacturer	Type No.	Serial No	Cal. Date
Schaffner NSG 2070 RF-Generator	Schaffner	N/A	N/A	2010/04/21

Power frequency magnetic field / SR3

Instrument	Manufacturer	Type No.	Serial No	Cal. Date
Induction Coil Interface	Schaffner	INA 2141	6002	N/A
Magnetic Loop Coil	Schaffner	INA 702	160	N/A
Triaxial ELF Magnetic Field Meter	F.B.BELL	4090	114135	2010/03/27

Voltage dips and interruption / SR3

Instrument	Manufacturer	Type No.	Serial No	Cal. Date
TRANSIENT TEST SYSTEM	EMC PARTNET	TRA2000IN6	1138	2010/12/09

Schaffner NSG 2070 RF-Generator				
Instrument	Manufacturer	Type No.	Serial No	Cal. Date
CDN	Schaffner	CAL U100A	20405	N/A
CDN	Schaffner	TRA U150	20454	N/A
CDN M016S	Schaffner	CAL U100A	20410	N/A
CDN M016S	Schaffner	TRA U150	21167	N/A
CDN T002	Schaffner	CAL U100	20491	N/A
CDN T002	Schaffner	TRA U150	21169	N/A
CDN T400	Schaffner	CAL U100	17735	N/A
CDN T400	Schaffner	TRA U150	21166	N/A
Coupling Decoupling Network	Schaffner	CDN M016S	20823	2010/04/02
Coupling Decoupling Network	Schaffner	CDN T002	19018	2010/04/02
Coupling Decoupling Network	Schaffner	CDN T400	21226	2010/04/02
EM-CLAMP	Schaffner	KEMZ 801	21024	2010/04/02

2.3. Measurement Uncertainty

Conducted Emission

The measurement uncertainty is evaluated as ± 2.26 dB.

Impedance Stabilization Network

The measurement uncertainty is evaluated as ± 2.26 dB.

Radiated Emission

The measurement uncertainty is evaluated as ± 3.19 dB.

Electrostatic Discharge

As what is concluded in the document from Note2 of clause 5.4.6.2 of ISO/IEC 17025: 1999[2], the requirements for measurement uncertainty in ESD testing are deemed to have been satisfied, and the testing is reported in accordance with the relevant ESD standards. The immunity test signal from the ESD system meet the required specifications in IEC 61000-4-2 through the calibration report with the calibrated uncertainty for the waveform of voltage and timing as being 1.0 % and 0.1%.

Radiated susceptibility

As what is concluded in the document from Note2 of clause 5.4.6.2 of ISO/IEC 17025: 1999[2], the requirements for measurement uncertainty in RS testing are deemed to have been satisfied, and the testing is reported in accordance with the relevant RS standards. The immunity test signal from the RS system meet the required specifications in IEC 61000-4-3 through the calibration for the uniform field strength and monitoring for the test level with the uncertainty evaluation report for the electrical filed strength as being 3.57 dB.

Electrical fast transient/burst

As what is concluded in the document from Note2 of clause 5.4.6.2 of ISO/IEC 17025: 1999[2], the requirements for measurement uncertainty in EFT/Burst testing are deemed to have been satisfied, and the testing is reported in accordance with the relevant EFT/Burst standards. The immunity test signal from the EFT/Burst system meet the required specifications in IEC 61000-4-4 through the calibration report with the calibrated uncertainty for the waveform of voltage, frequency and timing as being 4 %, and 2.5%.

Surge

As what is concluded in the document from Note2 of clause 5.4.6.2 of ISO/IEC 17025: 1999[2], the requirements for measurement uncertainty in Surge testing are deemed to have been satisfied, and the testing is reported in accordance with the relevant Surge standards. The immunity test signal from the Surge system meet the required specifications in IEC 61000-4-5 through the calibration report with the calibrated uncertainty for the waveform of voltage and timing as being 3.5 % and 0.1%.

Conducted susceptibility

As what is concluded in the document from Note2 of clause 5.4.6.2 of ISO/IEC 17025: 1999[2], the requirements for measurement uncertainty in CS testing are deemed to have been satisfied, and the testing is reported in accordance with the relevant CS standards. The immunity test signal from the CS system meet the required specifications in IEC 61000-4-6 through the calibration for unmodulated signal and monitoring for the test level with the uncertainty evaluation report for the injected modulated signal level through CDN and EM Clamp/Direct Injection as being 2.0 dB and 2.61 dB.

Power frequency magnetic field

As what is concluded in the document from Note2 of clause 5.4.6.2 of ISO/IEC 17025: 1999[2], the requirements for measurement uncertainty in PFM testing are deemed to have been satisfied, and the testing is reported in accordance with the relevant PFM standards. The immunity test signal from the PFM system meet the required specifications in IEC 61000-4-8 through the calibration report with the calibrated uncertainty for the Gauss Meter to verify the output level of magnetic field strength as being 2.0 %.

Voltage dips and interruption

As what is concluded in the document from Note2 of clause 5.4.6.2 of ISO/IEC 17025: 1999[2], the requirements for measurement uncertainty in DIP testing are deemed to have been satisfied, and the testing is reported in accordance with the relevant DIP standards. The immunity test signal from the DIP system meet the required specifications in IEC 61000-4-11 through the calibration report with the calibrated uncertainty for the waveform of voltage and timing as being 3.5 % and 0.1%.

2.4. Test Environment


Performed Item	Items	Required	Actual
Conducted Emission	Temperature (°C)	15-35	25
	Humidity (%RH)	25-75	50
	Barometric pressure (mbar)	860-1060	950-1000
Impedance Stabilization Network	Temperature (°C)	15-35	25
	Humidity (%RH)	25-75	50
	Barometric pressure (mbar)	860-1060	950-1000
Radiated Emission	Temperature (°C)	15-35	25
	Humidity (%RH)	25-75	50
	Barometric pressure (mbar)	860-1060	950-1000
Electrostatic Discharge	Temperature (°C)	15-35	20
	Humidity (%RH)	30-60	50
	Barometric pressure (mbar)	860-1060	950-1000
Radiated susceptibility	Temperature (°C)	15-35	18
	Humidity (%RH)	25-75	50
	Barometric pressure (mbar)	860-1060	950-1000
Electrical fast transient/burst	Temperature (°C)	15-35	18
	Humidity (%RH)	25-75	50
	Barometric pressure (mbar)	860-1060	950-1000
Surge	Temperature (°C)	15-35	20
	Humidity (%RH)	10-75	51
	Barometric pressure (mbar)	860-1060	950-1000
Conducted susceptibility	Temperature (°C)	15-35	18
	Humidity (%RH)	25-75	51
	Barometric pressure (mbar)	860-1060	950-1000
Power frequency magnetic field	Temperature (°C)	15-35	19
	Humidity (%RH)	25-75	51
	Barometric pressure (mbar)	860-1060	950-1000
Voltage dips and interruption	Temperature (°C)	15-35	18
	Humidity (%RH)	25-75	51
	Barometric pressure (mbar)	860-1060	950-1000

3. Conducted Emission (Main Terminals)

3.1. Test Specification

According to EMC Standard : EN 55022

3.2. Test Setup

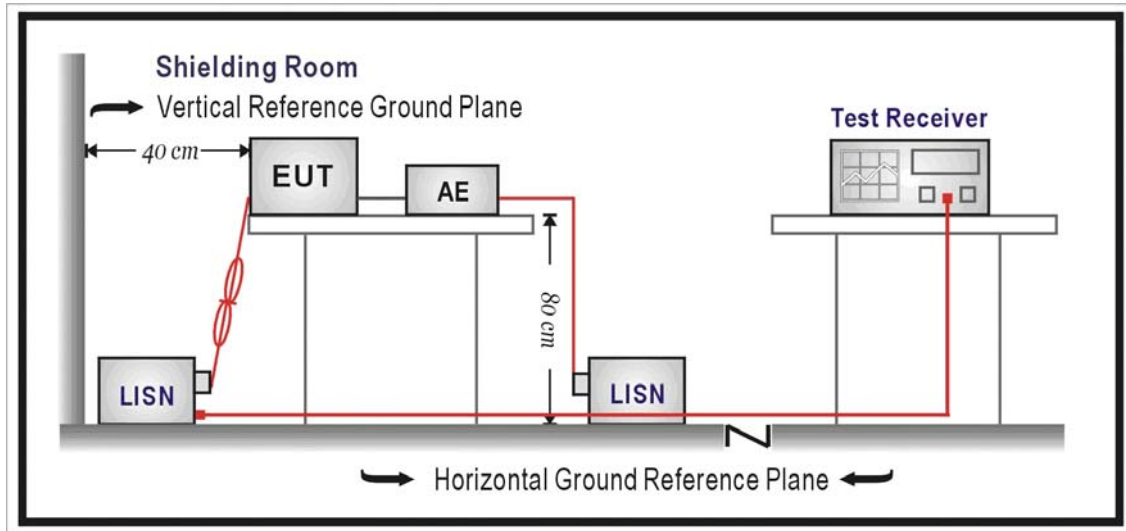

3.3. Limit

Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50-5.0	56	46
5.0 - 30	60	50

Remarks: In the above table, the tighter limit applies at the band edges.

3.4. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination.

(Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed on conducted measurement.

Conducted emissions were invested over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

3.5. Deviation from Test Standard


No deviation.

3.6. Test Result

Site : SR_1	Time : 2011/02/15 - 04:01
Limit : CISPR_B_00M_QP	Margin : 10
EUT : Network Camera	Probe : ENV_216_L1 - Line1
Power : AC 230V/50Hz	Note : Mode 1



Site : SR_1	Time : 2011/02/15 - 04:02
Limit : CISPR_B_00M_QP	Margin : 0
EUT : Network Camera	Probe : ENV_216_L1 - Line1
Power : AC 230V/50Hz	Note : Mode 1

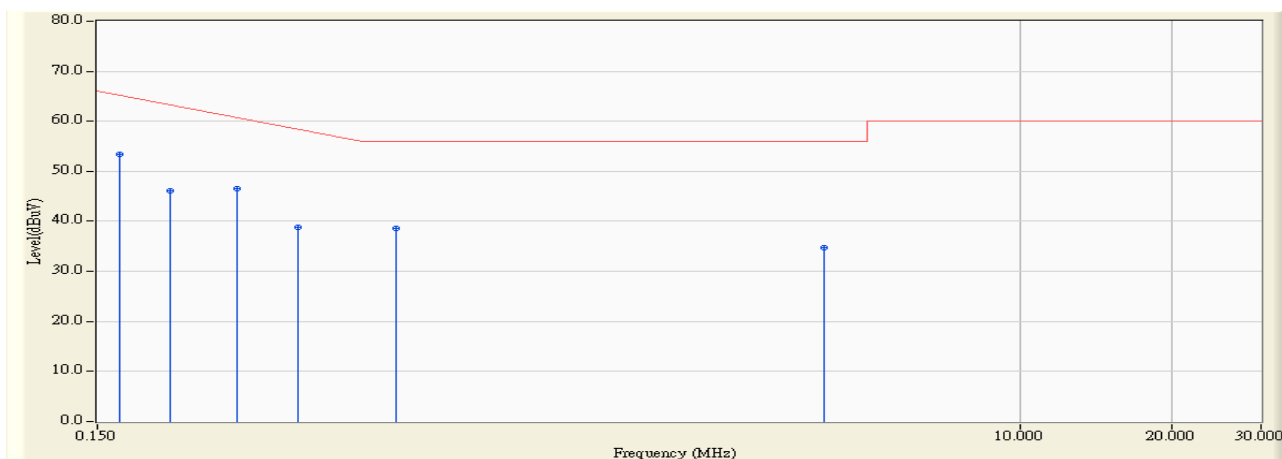


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1	*	0.166	9.790	43.610	53.400	-12.143	65.543	QUASIPeAK
2		0.209	9.790	36.360	46.150	-18.164	64.314	QUASIPeAK
3		0.283	9.790	36.710	46.500	-15.700	62.200	QUASIPeAK
4		0.373	9.790	29.100	38.890	-20.739	59.629	QUASIPeAK
5		0.584	9.790	28.710	38.500	-17.500	56.000	QUASIPeAK
6		4.107	9.820	24.830	34.650	-21.350	56.000	QUASIPeAK

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Site : SR_1	Time : 2011/02/15 - 04:02
Limit : CISPR_B_00M_AV	Margin : 0
EUT : Network Camera	Probe : ENV_216_L1 - Line1
Power : AC 230V/50Hz	Note : Mode 1

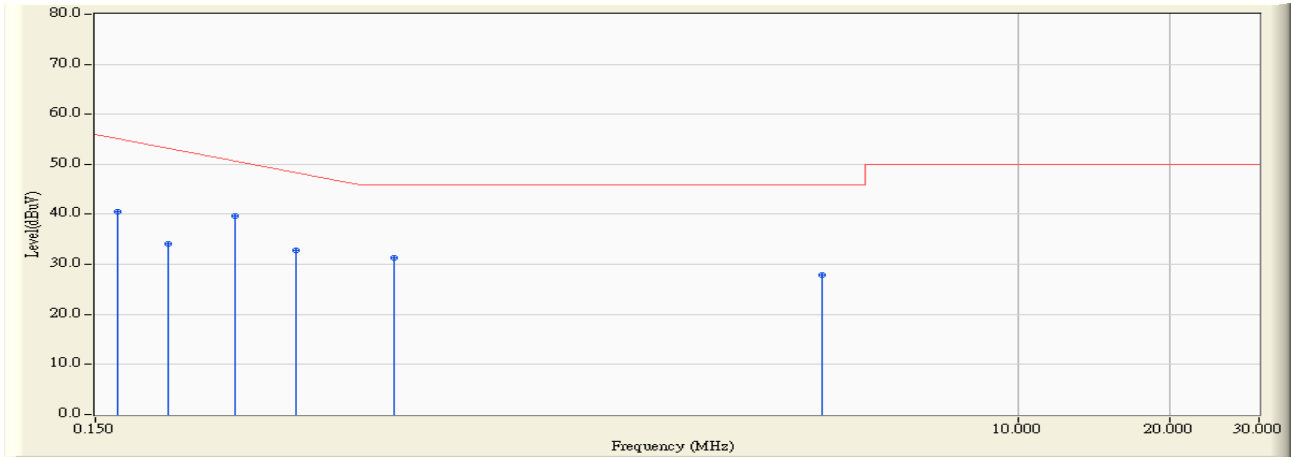

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1		0.166	9.790	30.850	40.640	-14.903	55.543	AVERAGE
2		0.209	9.790	24.210	34.000	-20.314	54.314	AVERAGE
3	*	0.283	9.790	29.810	39.600	-12.600	52.200	AVERAGE
4		0.373	9.790	23.000	32.790	-16.839	49.629	AVERAGE
5		0.584	9.790	21.460	31.250	-14.750	46.000	AVERAGE
6		4.107	9.820	18.020	27.840	-18.160	46.000	AVERAGE


Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Site : SR_1	Time : 2011/02/15 - 04:03
Limit : CISPR_B_00M_QP	Margin : 10
EUT : Network Camera	Probe : ENV_216_N - Line2
Power : AC 230V/50Hz	Note : Mode 1



Site : SR_1	Time : 2011/02/15 - 04:04
Limit : CISPR_B_00M_QP	Margin : 0
EUT : Network Camera	Probe : ENV_216_N - Line2
Power : AC 230V/50Hz	Note : Mode 1

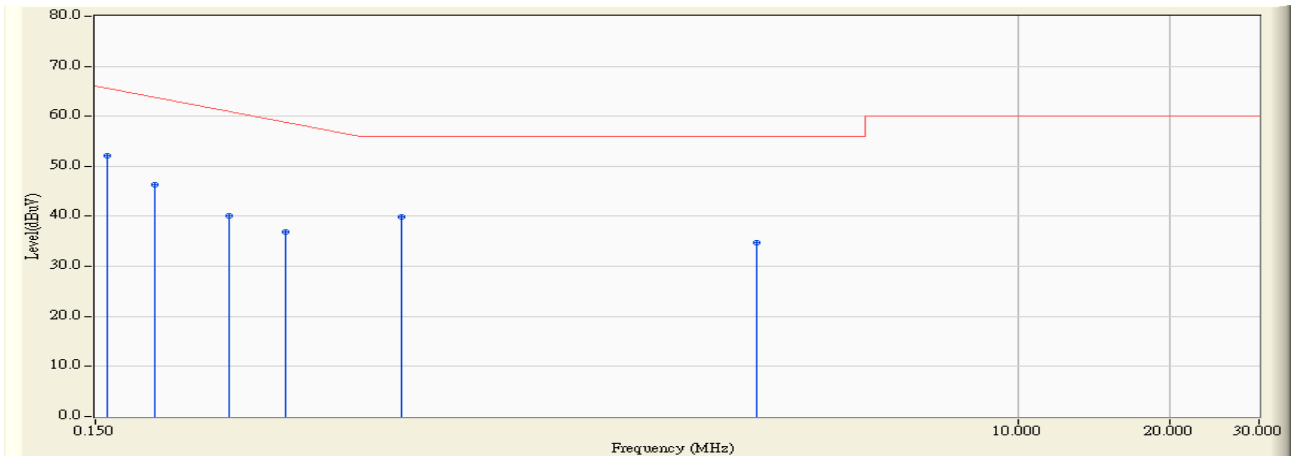


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1	*	0.158	9.781	42.370	52.151	-13.620	65.771	QUASIPeAK
2		0.197	9.780	36.620	46.400	-18.257	64.657	QUASIPeAK
3		0.275	9.780	30.270	40.050	-22.379	62.429	QUASIPeAK
4		0.357	9.790	27.200	36.990	-23.096	60.086	QUASIPeAK
5		0.603	9.790	30.140	39.930	-16.070	56.000	QUASIPeAK
6		3.045	9.810	25.030	34.840	-21.160	56.000	QUASIPeAK

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Site : SR_1	Time : 2011/02/15 - 04:04
Limit : CISPR_B_00M_AV	Margin : 0
EUT : Network Camera	Probe : ENV_216_N - Line2
Power : AC 230V/50Hz	Note : Mode 1

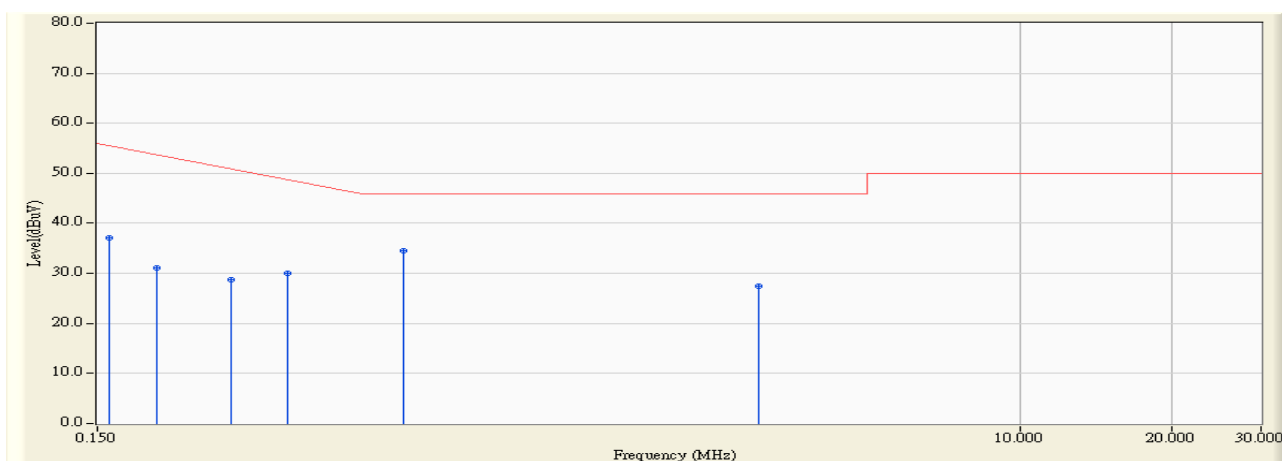


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1		0.158	9.781	27.230	37.011	-18.760	55.771	AVERAGE
2		0.197	9.780	21.370	31.150	-23.507	54.657	AVERAGE
3		0.275	9.780	19.050	28.830	-23.599	52.429	AVERAGE
4		0.357	9.790	20.320	30.110	-19.976	50.086	AVERAGE
5	*	0.603	9.790	24.710	34.500	-11.500	46.000	AVERAGE
6		3.045	9.810	17.690	27.500	-18.500	46.000	AVERAGE


Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Site : SR_1	Time : 2011/02/15 - 04:19
Limit : CISPR_B_00M_QP	Margin : 10
EUT : Network Camera	Probe : ENV_216_L1 - Line1
Power : AC 230V/50Hz	Note : Mode 2

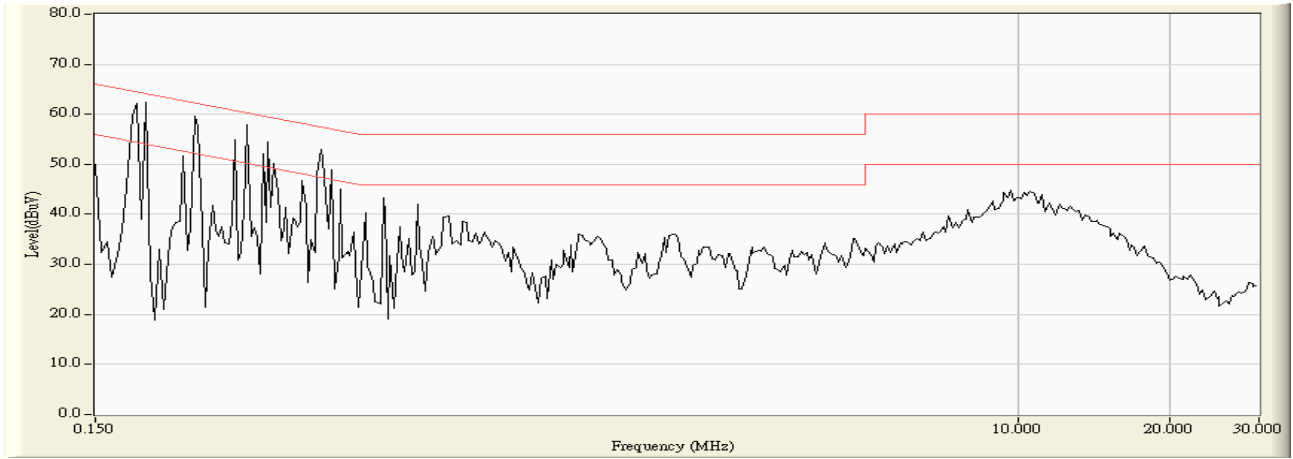

Site : SR_1	Time : 2011/02/15 - 04:20
Limit : CISPR_B_00M_QP	Margin : 0
EUT : Network Camera	Probe : ENV_216_L1 - Line1
Power : AC 230V/50Hz	Note : Mode 2

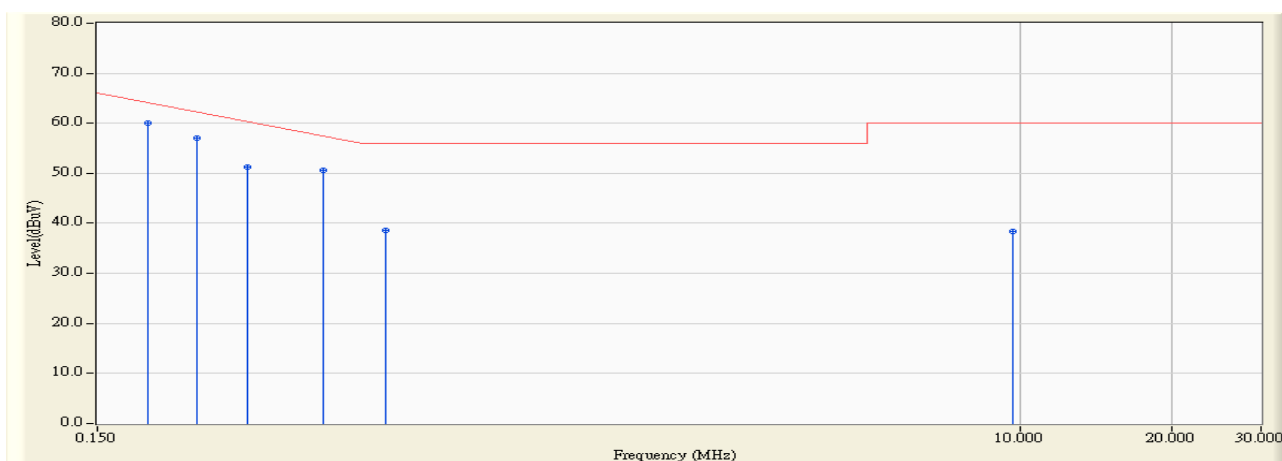


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1	*	0.189	9.790	50.340	60.130	-4.756	64.886	QUASIPeAK
2		0.236	9.790	47.240	57.030	-6.513	63.543	QUASIPeAK
3		0.298	9.790	41.500	51.290	-10.481	61.771	QUASIPeAK
4		0.420	9.790	40.760	50.550	-7.736	58.286	QUASIPeAK
5		0.556	9.790	28.910	38.700	-17.300	56.000	QUASIPeAK
6		9.709	9.880	28.550	38.430	-21.570	60.000	QUASIPeAK

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Site : SR_1	Time : 2011/02/15 - 04:20
Limit : CISPR_B_00M_AV	Margin : 0
EUT : Network Camera	Probe : ENV_216_L1 - Line1
Power : AC 230V/50Hz	Note : Mode 2

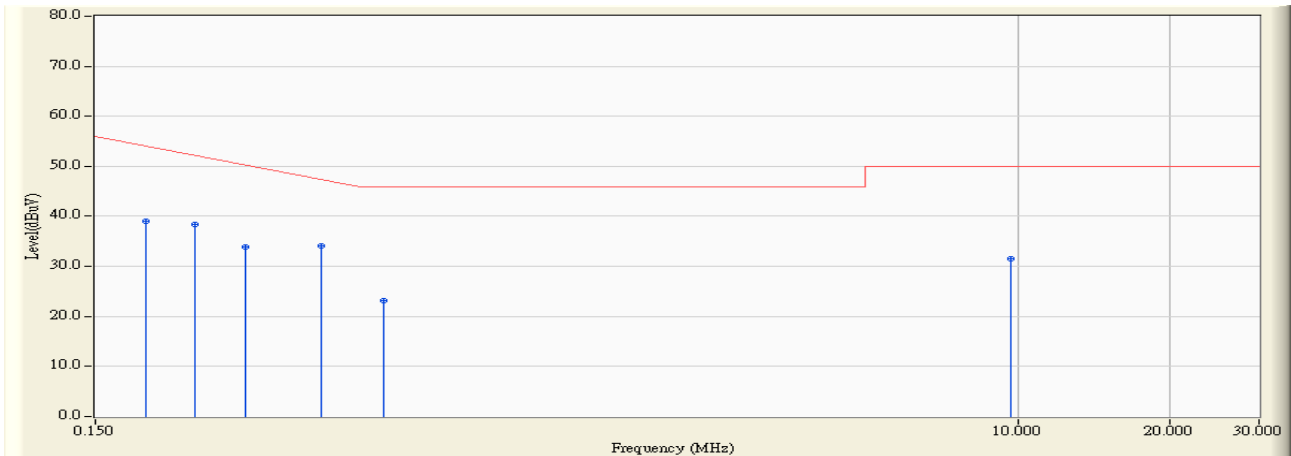


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1		0.189	9.790	29.340	39.130	-15.756	54.886	AVERAGE
2		0.236	9.790	28.690	38.480	-15.063	53.543	AVERAGE
3		0.298	9.790	24.060	33.850	-17.921	51.771	AVERAGE
4	*	0.420	9.790	24.310	34.100	-14.186	48.286	AVERAGE
5		0.556	9.790	13.420	23.210	-22.790	46.000	AVERAGE
6		9.709	9.880	21.570	31.450	-18.550	50.000	AVERAGE


Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Site : SR_1	Time : 2011/02/15 - 04:21
Limit : CISPR_B_00M_QP	Margin : 10
EUT : Network Camera	Probe : ENV_216_N - Line2
Power : AC 230V/50Hz	Note : Mode 2

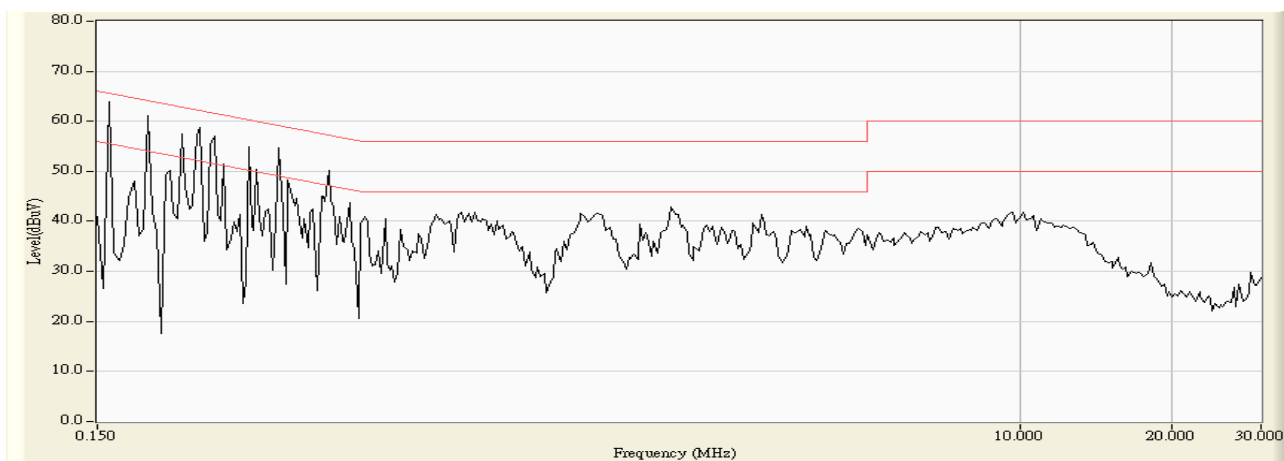

Site : SR_1	Time : 2011/02/15 - 04:22
Limit : CISPR_B_00M_QP	Margin : 0
EUT : Network Camera	Probe : ENV_216_N - Line2
Power : AC 230V/50Hz	Note : Mode 2

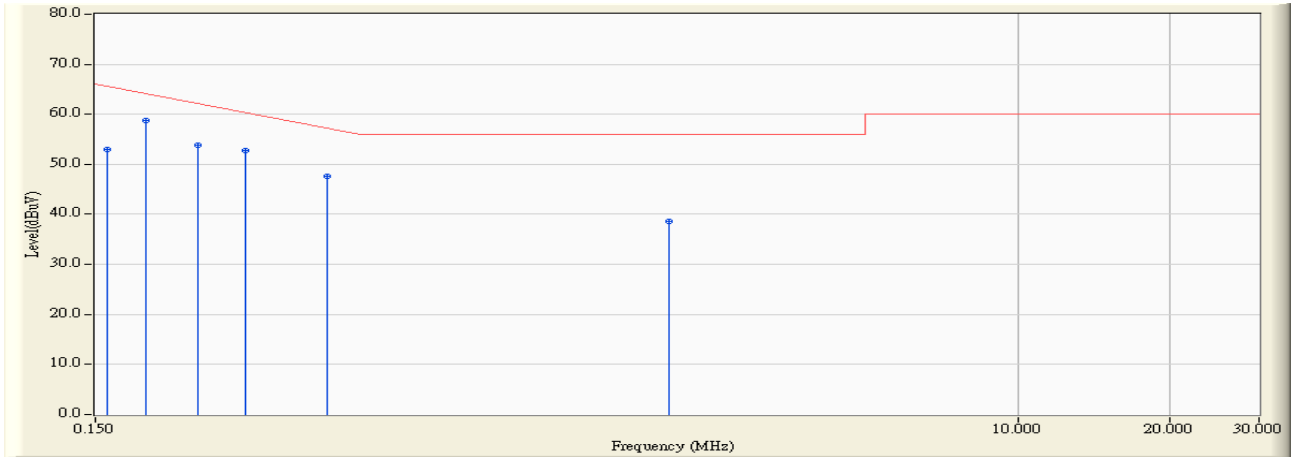


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1		0.158	9.781	43.290	53.071	-12.700	65.771	QUASIPeAK
2	*	0.189	9.780	48.980	58.760	-6.126	64.886	QUASIPeAK
3		0.240	9.780	43.950	53.730	-9.699	63.429	QUASIPeAK
4		0.298	9.786	42.900	52.686	-9.085	61.771	QUASIPeAK
5		0.431	9.790	37.740	47.530	-10.441	57.971	QUASIPeAK
6		2.048	9.800	28.840	38.640	-17.360	56.000	QUASIPeAK

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Site : SR_1	Time : 2011/02/15 - 04:22
Limit : CISPR_B_00M_AV	Margin : 0
EUT : Network Camera	Probe : ENV_216_N - Line2
Power : AC 230V/50Hz	Note : Mode 2

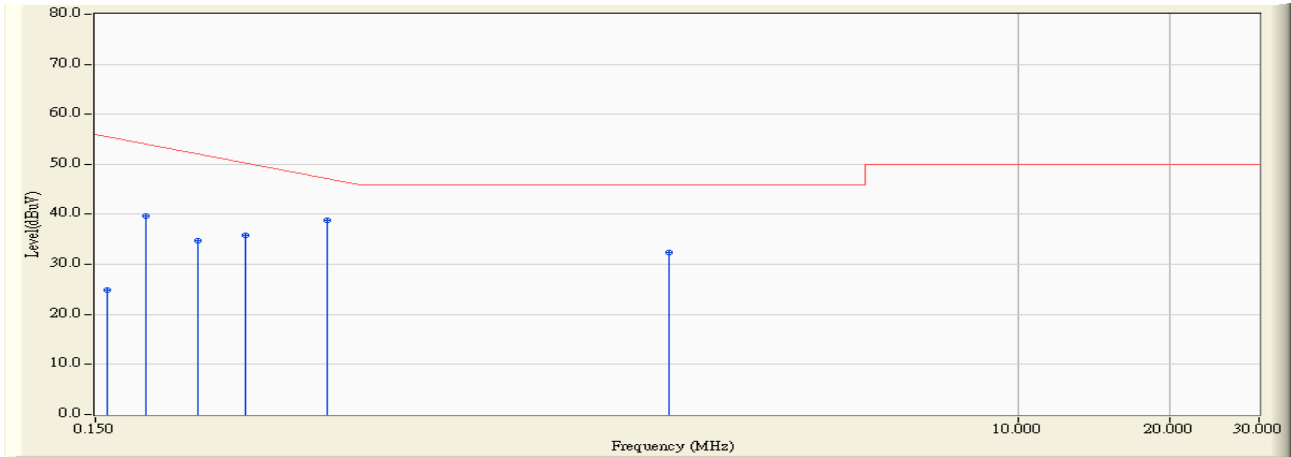

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1		0.158	9.781	15.100	24.881	-30.890	55.771	AVERAGE
2		0.189	9.780	29.950	39.730	-15.156	54.886	AVERAGE
3		0.240	9.780	24.940	34.720	-18.709	53.429	AVERAGE
4		0.298	9.786	26.120	35.906	-15.865	51.771	AVERAGE
5	*	0.431	9.790	28.940	38.730	-9.241	47.971	AVERAGE
6		2.048	9.800	22.680	32.480	-13.520	46.000	AVERAGE

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

3.7. Test Photograph

Test Mode : Mode 1: CF1205-E, Normal Operation

Description : Front View of Conducted Test



Test Mode : Mode 1: CF1205-E, Normal Operation

Description : Back View of Conducted Test



Test Mode : Mode 2: AF1205-B, Normal Operation

Description : Front View of Conducted Test



Test Mode : Mode 2: AF1205-B, Normal Operation

Description : Back View of Conducted Test




4. Conducted Emissions (Telecommunication Ports)

4.1. Test Specification

According to EMC Standard : EN 55022

4.2. Test Setup

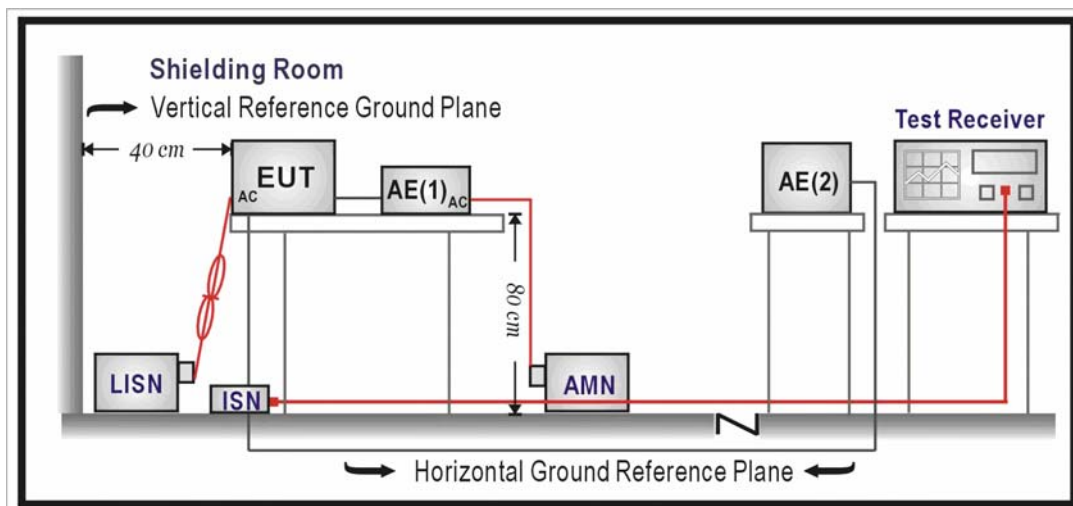

4.3. Limit

Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	84 – 74	74 – 64
0.50 - 30	74	64

Remarks:

The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz~0.50 MHz.

4.4. Test Procedure

Telecommunication Port:

The mains voltage shall be supplied to the EUT via the LISN when the measurement of telecommunication port is performed. The common mode disturbances at the telecommunication port shall be connected to the ISN, which is 150 ohm impedance.

Both alternative cables are tested related to the LCL requested. The measurement range is from 150kHz to 30MHz. The bandwidth of measurement is set to 9kHz.


The 75dB LCL ISN is used for cat. 6 cable, the 65dB LCL ISN is used for cat. 5 cable, 55dB LCL ISN is used for cat. 3.

4.5. Deviation from Test Standard


No deviation.

4.6. Test Result

Site : SR_1	Time : 2011/02/15 - 03:56
Limit : ISN_Voltage_B_00M_QP	Margin : 10
EUT : Network Camera	Probe : ISN_T4 - Line1
Power : AC 230V/50Hz	Note : Mode 1, ISN 10MB

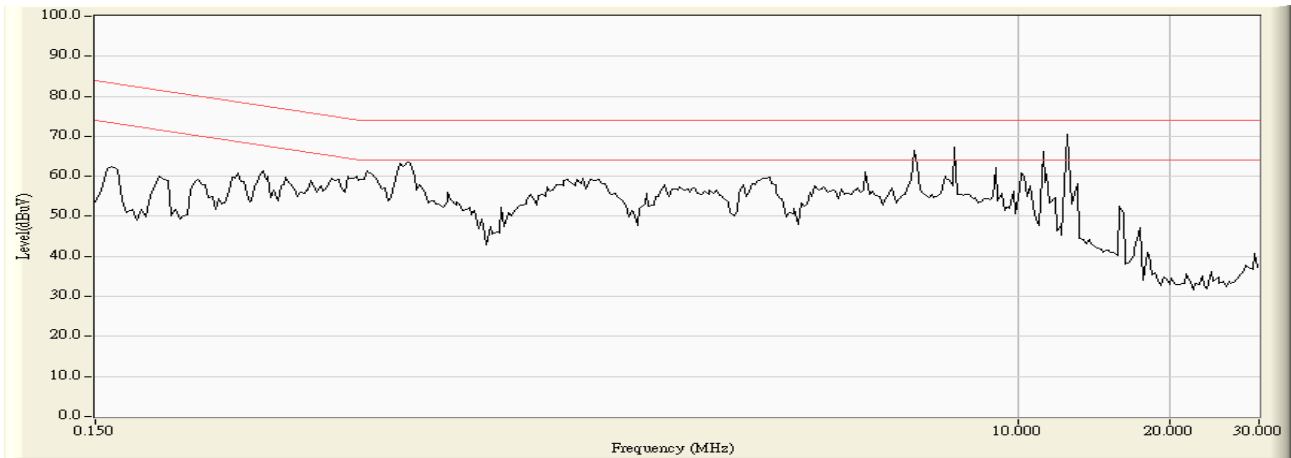

Site : SR_1	Time : 2011/02/15 - 03:58
Limit : ISN_Voltage_B_00M_QP	Margin : 0
EUT : Network Camera	Probe : ISN_T4 - Line1
Power : AC 230V/50Hz	Note : Mode 1, ISN 10MB

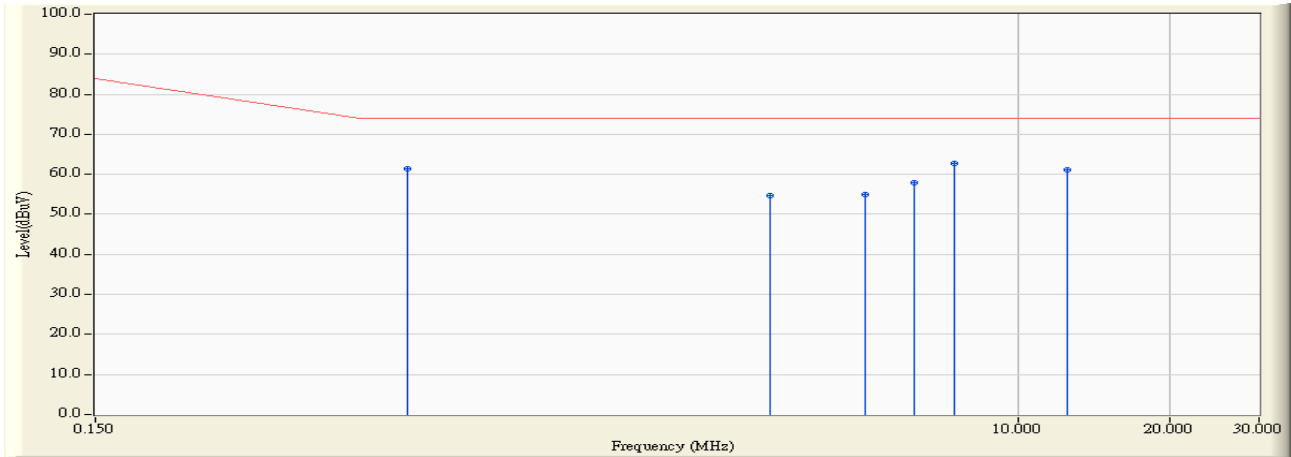


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1		0.623	9.990	51.330	61.320	-12.680	74.000	QUASIPeAK
2		3.232	9.990	44.590	54.580	-19.420	74.000	QUASIPeAK
3		5.002	9.980	44.940	54.920	-19.080	74.000	QUASIPeAK
4		6.248	9.977	47.890	57.867	-16.133	74.000	QUASIPeAK
5	*	7.498	9.970	52.890	62.860	-11.140	74.000	QUASIPeAK
6		12.502	10.073	51.130	61.203	-12.797	74.000	QUASIPeAK

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Site : SR_1	Time : 2011/02/15 - 03:58
Limit : ISN_Voltage_B_00M_AV	Margin : 0
EUT : Network Camera	Probe : ISN_T4 - Line1
Power : AC 230V/50Hz	Note : Mode 1, ISN 10MB

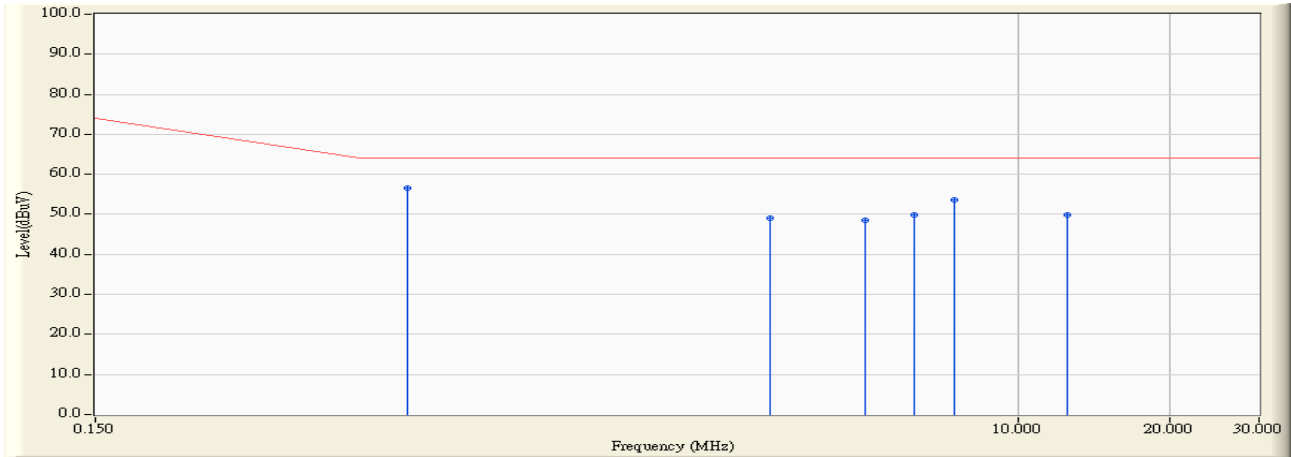


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1	*	0.623	9.990	46.640	56.630	-7.370	64.000	AVERAGE
2		3.232	9.990	38.990	48.980	-15.020	64.000	AVERAGE
3		5.002	9.980	38.580	48.560	-15.440	64.000	AVERAGE
4		6.248	9.977	39.910	49.887	-14.113	64.000	AVERAGE
5		7.498	9.970	43.560	53.530	-10.470	64.000	AVERAGE
6		12.502	10.073	39.920	49.993	-14.007	64.000	AVERAGE


Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Site : SR_1	Time : 2011/02/15 - 03:58
Limit : ISN_Voltage_B_00M_QP	Margin : 10
EUT : Network Camera	Probe : ISN_T4 - Line1
Power : AC 230V/50Hz	Note : Mode 1, ISN 100MB

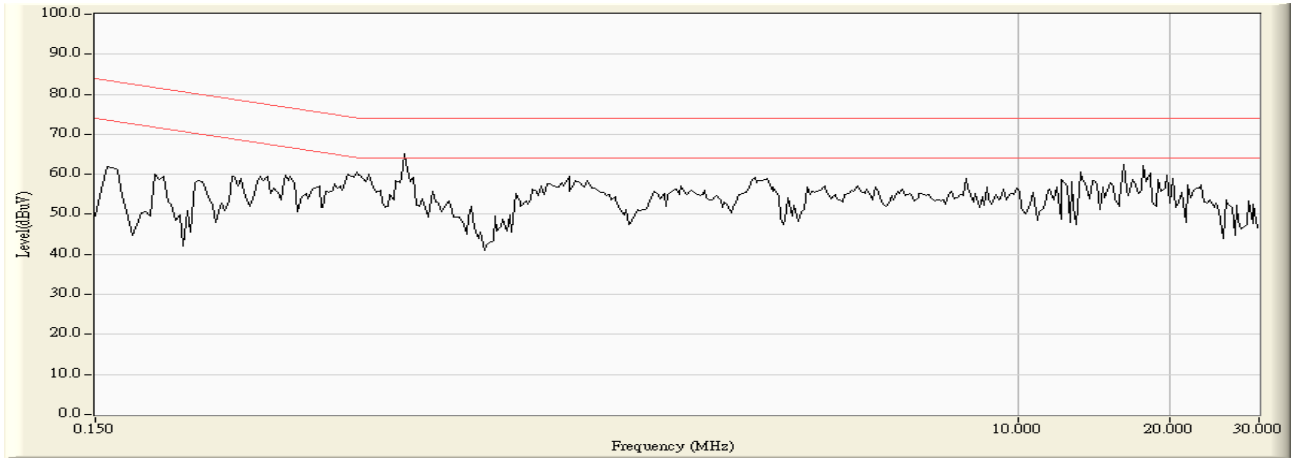

Site : SR_1	Time : 2011/02/15 - 03:59
Limit : ISN_Voltage_B_00M_QP	Margin : 0
EUT : Network Camera	Probe : ISN_T4 - Line1
Power : AC 230V/50Hz	Note : Mode 1, ISN 100MB

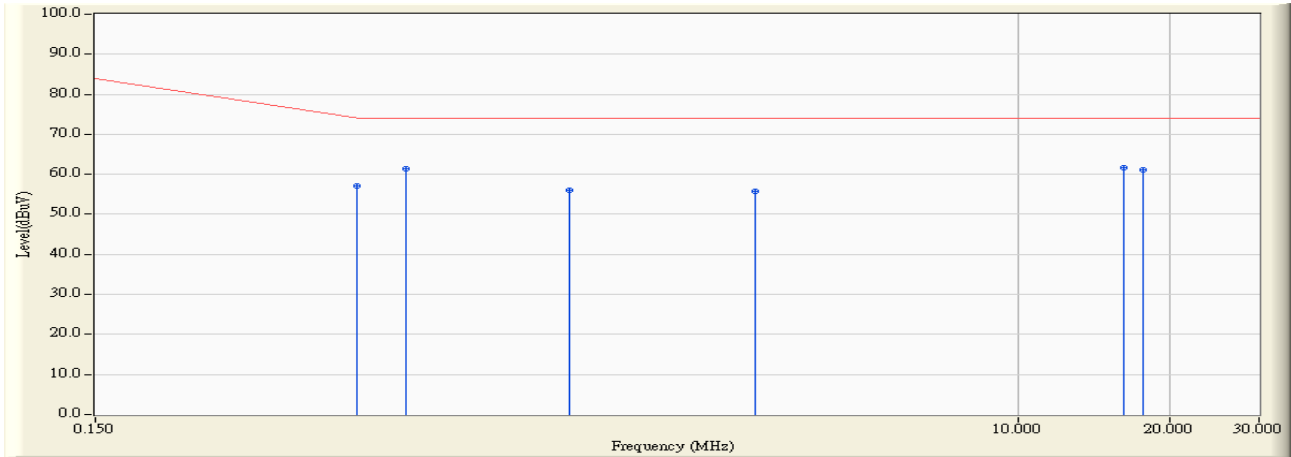


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1		0.494	9.990	47.170	57.160	-17.011	74.171	QUASIPeAK
2		0.615	9.990	51.330	61.320	-12.680	74.000	QUASIPeAK
3		1.298	9.990	46.170	56.160	-17.840	74.000	QUASIPeAK
4		3.029	9.990	45.780	55.770	-18.230	74.000	QUASIPeAK
5	*	16.228	10.130	51.660	61.790	-12.210	74.000	QUASIPeAK
6		17.693	10.120	51.000	61.120	-12.880	74.000	QUASIPeAK

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Site : SR_1	Time : 2011/02/15 - 03:59
Limit : ISN_Voltage_B_00M_AV	Margin : 0
EUT : Network Camera	Probe : ISN_T4 - Line1
Power : AC 230V/50Hz	Note : Mode 1, ISN 100MB

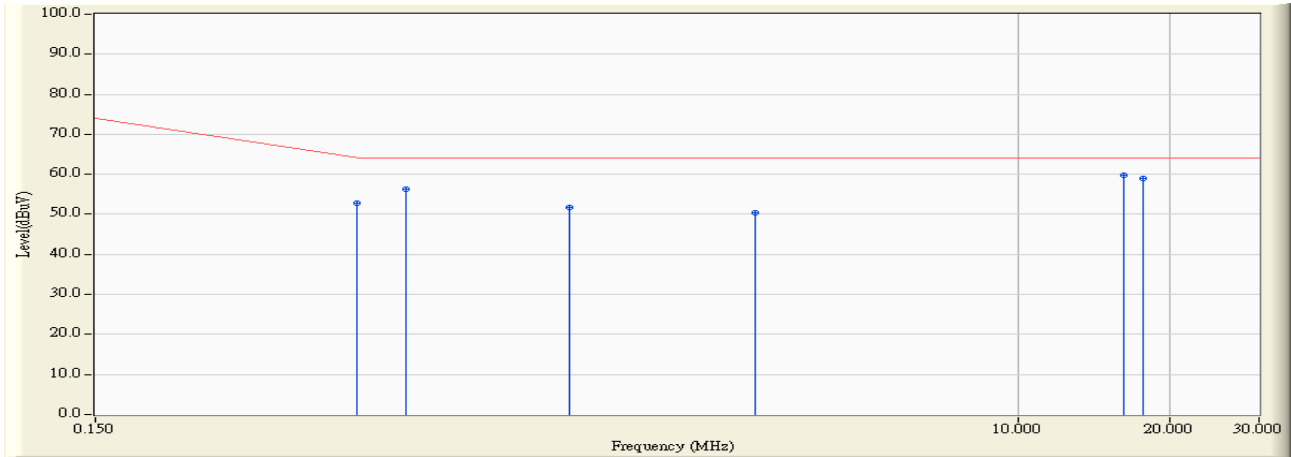


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1		0.494	9.990	42.830	52.820	-11.351	64.171	AVERAGE
2		0.615	9.990	46.370	56.360	-7.640	64.000	AVERAGE
3		1.298	9.990	41.870	51.860	-12.140	64.000	AVERAGE
4		3.029	9.990	40.500	50.490	-13.510	64.000	AVERAGE
5	*	16.228	10.130	49.560	59.690	-4.310	64.000	AVERAGE
6		17.693	10.120	48.980	59.100	-4.900	64.000	AVERAGE


Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Site : SR_1	Time : 2011/02/15 - 04:25
Limit : ISN_Voltage_B_00M_QP	Margin : 10
EUT : Network Camera	Probe : ISN_T4 - Line1
Power : AC 230V/50Hz	Note : Mode 2, ISN 10MB

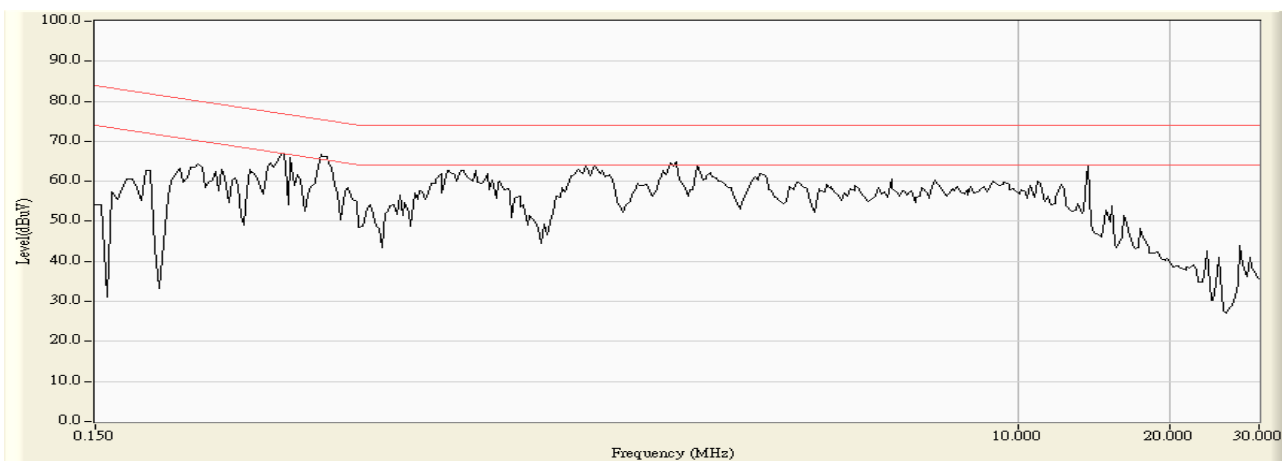

Site : SR_1	Time : 2011/02/15 - 04:26
Limit : ISN_Voltage_B_00M_QP	Margin : 0
EUT : Network Camera	Probe : ISN_T4 - Line1
Power : AC 230V/50Hz	Note : Mode 2, ISN 10MB

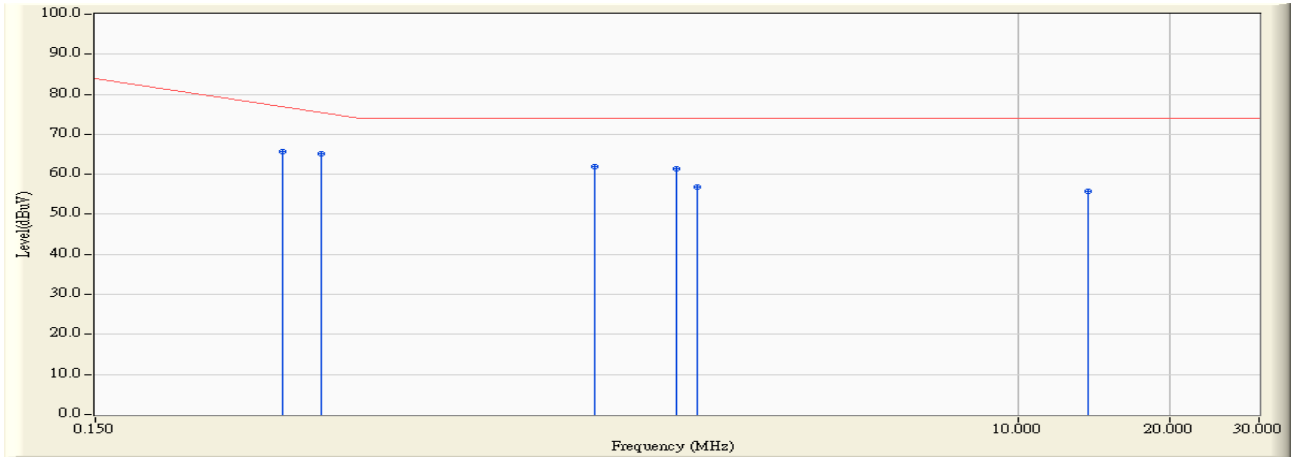


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1		0.353	10.010	55.790	65.800	-12.400	78.200	QUASIPeAK
2	*	0.420	10.000	55.270	65.270	-11.016	76.286	QUASIPeAK
3		1.455	9.990	51.860	61.850	-12.150	74.000	QUASIPeAK
4		2.111	10.000	51.500	61.500	-12.500	74.000	QUASIPeAK
5		2.330	10.000	46.710	56.710	-17.290	74.000	QUASIPeAK
6		13.748	10.145	45.640	55.785	-18.215	74.000	QUASIPeAK

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Site : SR_1	Time : 2011/02/15 - 04:26
Limit : ISN_Voltage_B_00M_AV	Margin : 0
EUT : Network Camera	Probe : ISN_T4 - Line1
Power : AC 230V/50Hz	Note : Mode 2, ISN 10MB

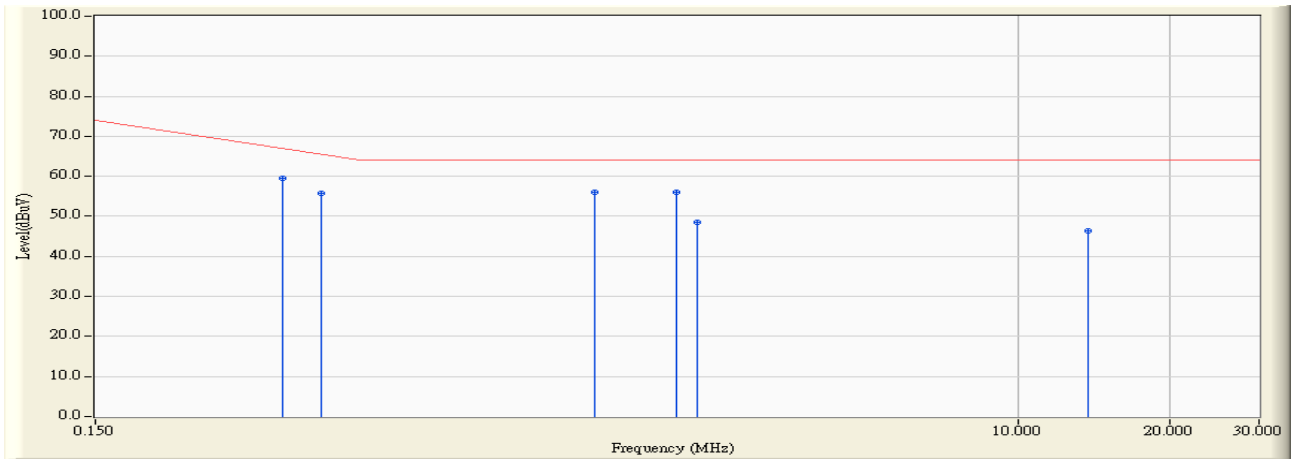


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1		0.353	10.010	49.420	59.430	-8.770	68.200	AVERAGE
2		0.420	10.000	45.840	55.840	-10.446	66.286	AVERAGE
3		1.455	9.990	45.940	55.930	-8.070	64.000	AVERAGE
4	*	2.111	10.000	45.940	55.940	-8.060	64.000	AVERAGE
5		2.330	10.000	38.530	48.530	-15.470	64.000	AVERAGE
6		13.748	10.145	36.310	46.455	-17.545	64.000	AVERAGE


Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Site : SR_1	Time : 2011/02/15 - 04:23
Limit : ISN_Voltage_B_00M_QP	Margin : 10
EUT : Network Camera	Probe : ISN_T4 - Line1
Power : AC 230V/50Hz	Note : Mode 2, ISN 100MB

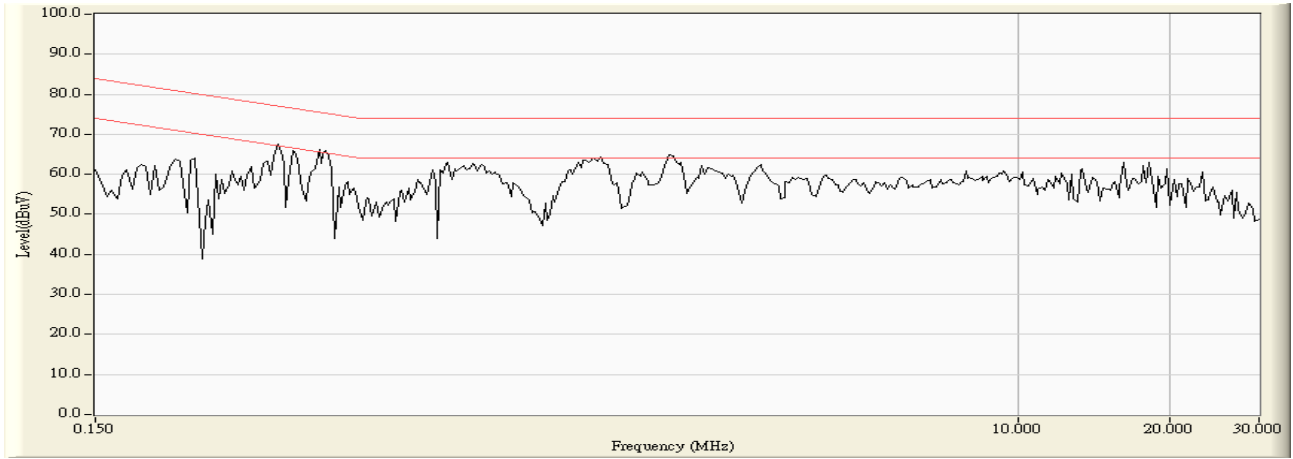

Site : SR_1	Time : 2011/02/15 - 04:24
Limit : ISN_Voltage_B_00M_QP	Margin : 0
EUT : Network Camera	Probe : ISN_T4 - Line1
Power : AC 230V/50Hz	Note : Mode 2, ISN 100MB

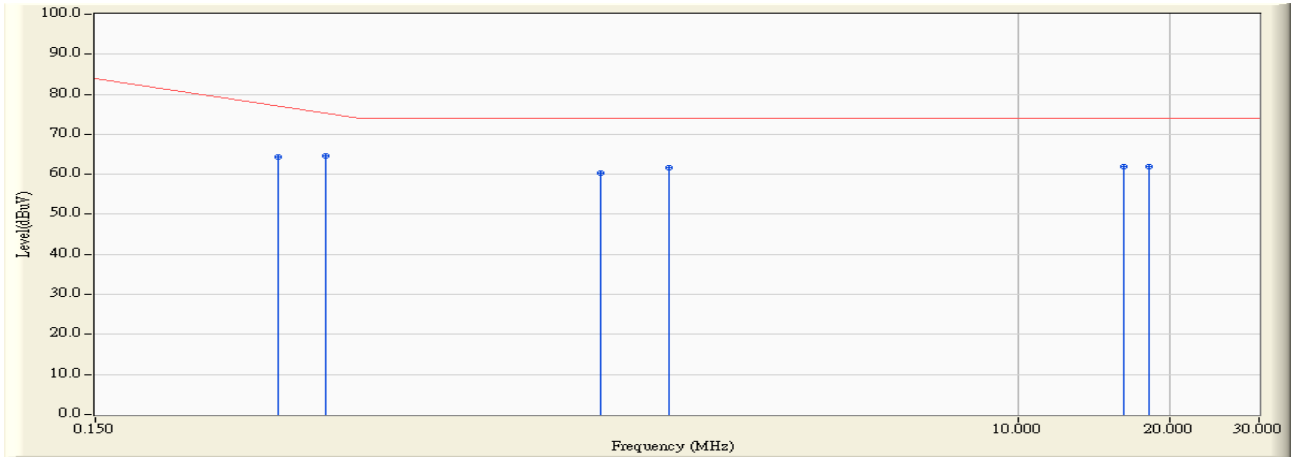


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1		0.345	10.010	54.330	64.340	-14.089	78.429	QUASIPeAK
2	*	0.427	10.000	54.500	64.500	-11.586	76.086	QUASIPeAK
3		1.498	9.990	50.370	60.360	-13.640	74.000	QUASIPeAK
4		2.041	10.000	51.700	61.700	-12.300	74.000	QUASIPeAK
5		16.228	10.130	51.800	61.930	-12.070	74.000	QUASIPeAK
6		18.244	10.120	51.700	61.820	-12.180	74.000	QUASIPeAK

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Site : SR_1	Time : 2011/02/15 - 04:24
Limit : ISN_Voltage_B_00M_AV	Margin : 0
EUT : Network Camera	Probe : ISN_T4 - Line1
Power : AC 230V/50Hz	Note : Mode 2, ISN 100MB

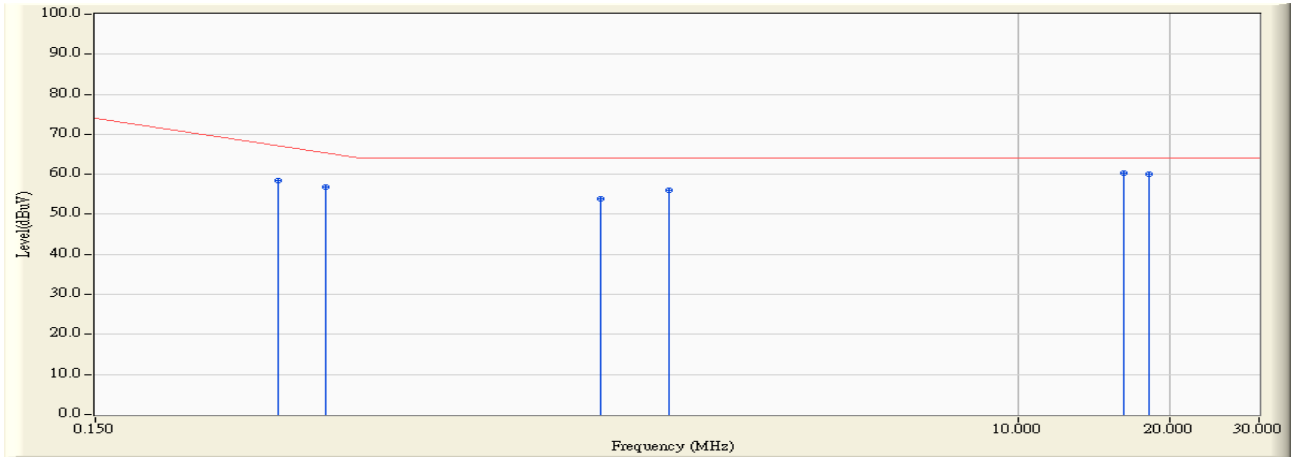

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1		0.345	10.010	48.520	58.530	-9.899	68.429	AVERAGE
2		0.427	10.000	46.830	56.830	-9.256	66.086	AVERAGE
3		1.498	9.990	43.790	53.780	-10.220	64.000	AVERAGE
4		2.041	10.000	46.030	56.030	-7.970	64.000	AVERAGE
5	*	16.228	10.130	50.060	60.190	-3.810	64.000	AVERAGE
6		18.244	10.120	50.010	60.130	-3.870	64.000	AVERAGE

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

4.7. Test Photograph

Test Mode : Mode 1: CF1205-E, Normal Operation

Description : Front View of ISN Test



Test Mode : Mode 1: CF1205-E, Normal Operation

Description : Back View of ISN Test



Test Mode : Mode 2: AF1205-B, Normal Operation

Description : Front View of ISN Test



Test Mode : Mode 2: AF1205-B, Normal Operation

Description : Back View of ISN Test




5. Radiated Emission

5.1. Test Specification


According to EMC Standard : EN 55022

5.2. Test Setup

Under 1GHz Test Setup:

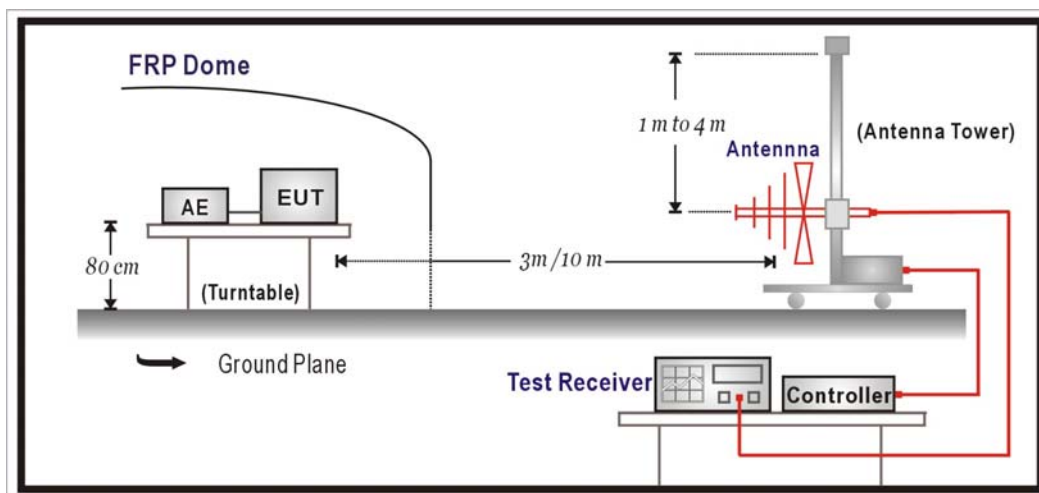

Above 1GHz Test Setup:

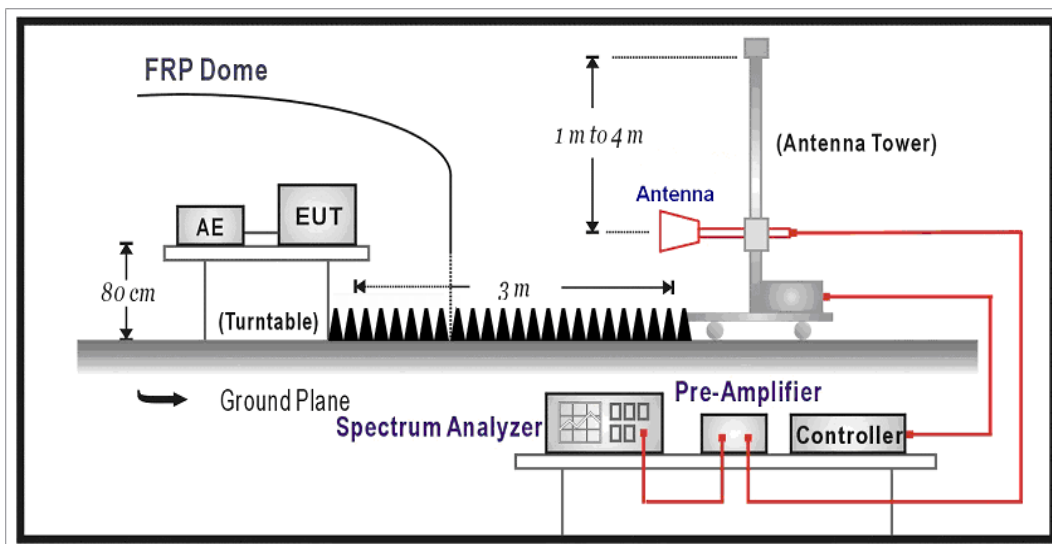

5.3. Limit

Limits		
Frequency (MHz)	Distance (m)	dBuV/m
30 – 230	10	30
230 – 1000	10	37

Limits			
Frequency (GHz)	Distance (m)	Peak (dBuV/m)	Average (dBuV/m)
1 – 3	3	70	50
3 – 6	3	74	54

Remark:

1. The tighter limit shall apply at the edge between two frequency bands.
2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5 th harmonic of the highest frequency or 6 GHz, whichever is lower

5.4. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3/10 meters. The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated on radiated measurement.

Radiated emissions were investigated over the frequency range from 30MHz to 1GHz using a receiver bandwidth of 120kHz and above 1GHz using a receiver bandwidth of 1MHz.

30MHz to 1GHz Radiated was performed at an antenna to EUT distance of 10 meters.

Above 1GHz Radiated was performed at an antenna to EUT distance of 3 meters.


It is placed with absorb on the ground between EUT and Antenna.

5.5. Deviation from Test Standard

No deviation.

5.6. Test Result

Site : OATS-2	Time : 2011/02/14 - 23:19
Limit : CISPR_B_10M_QP	Margin : 6
EUT : Network Camera	Probe : Site2_CBL6112_10M_0811 - HORIZONTAL
Power : AC 230V/50Hz	Note : Mode 1

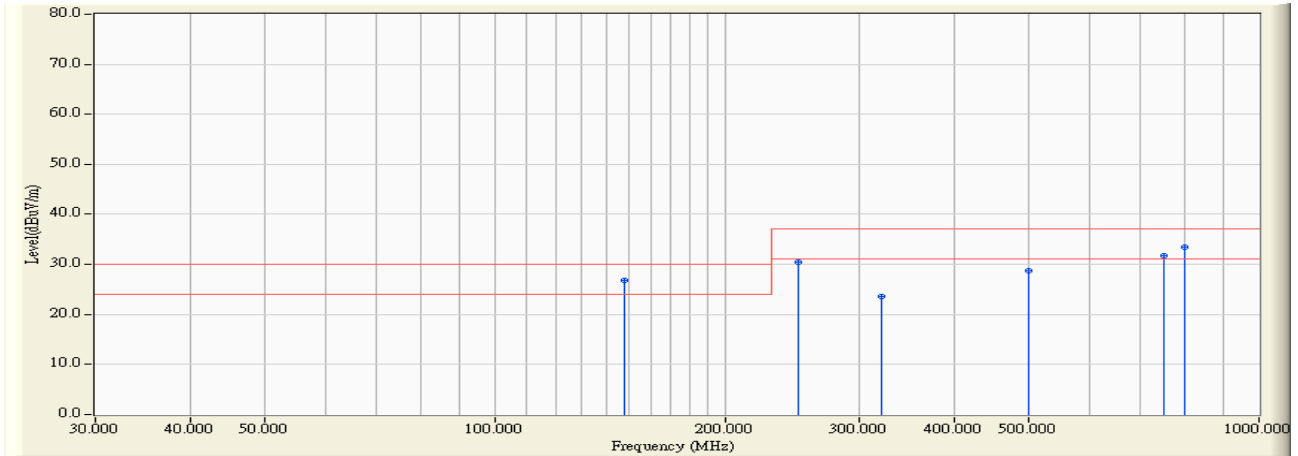


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	147.850	13.715	13.200	26.915	-3.085	30.000	QUASPEAK
2		250.000	15.948	14.600	30.548	-6.452	37.000	QUASPEAK
3		320.000	17.699	5.800	23.499	-13.501	37.000	QUASPEAK
4		500.000	21.905	6.900	28.805	-8.195	37.000	QUASPEAK
5		750.000	25.180	6.525	31.705	-5.295	37.000	QUASPEAK
6		800.000	25.808	7.600	33.408	-3.592	37.000	QUASPEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Site : OATS-2	Time : 2011/02/14 - 23:01
Limit : CISPR_B_10M_QP	Margin : 6
EUT : Network Camera	Probe : Site2_CBL6112_10M_0811 - VERTICAL
Power : AC 230V/50Hz	Note : Mode 1

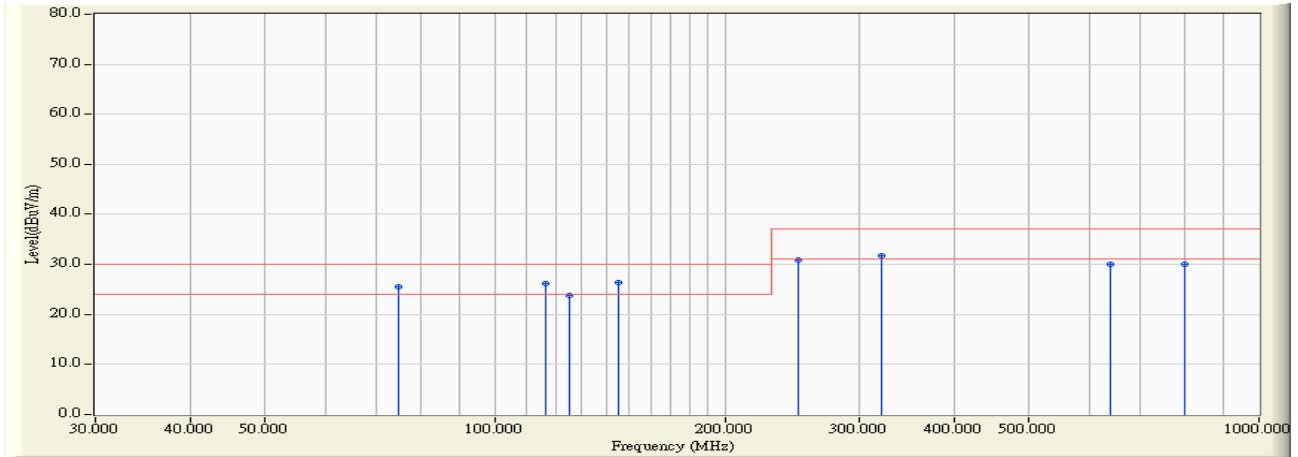


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		74.640	9.394	16.200	25.594	-4.406	30.000	QUASIPeAK
2		116.350	14.760	11.500	26.261	-3.739	30.000	QUASIPeAK
3		125.000	14.741	9.100	23.841	-6.159	30.000	QUASIPeAK
4	*	145.262	13.912	12.500	26.412	-3.588	30.000	QUASIPeAK
5		250.000	15.948	14.900	30.848	-6.152	37.000	QUASIPeAK
6		320.000	17.699	14.100	31.799	-5.201	37.000	QUASIPeAK
7		640.000	23.899	6.200	30.099	-6.901	37.000	QUASIPeAK
8		800.000	25.808	4.300	30.108	-6.892	37.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Site : OATS-2	Time : 2011/02/15 - 00:19
Limit : CISPR_B_10M_QP	Margin : 6
EUT : Network Camera	Probe : Site2_CBL6112_10M_0811 - HORIZONTAL
Power : AC 230V/50Hz	Note : Mode 2

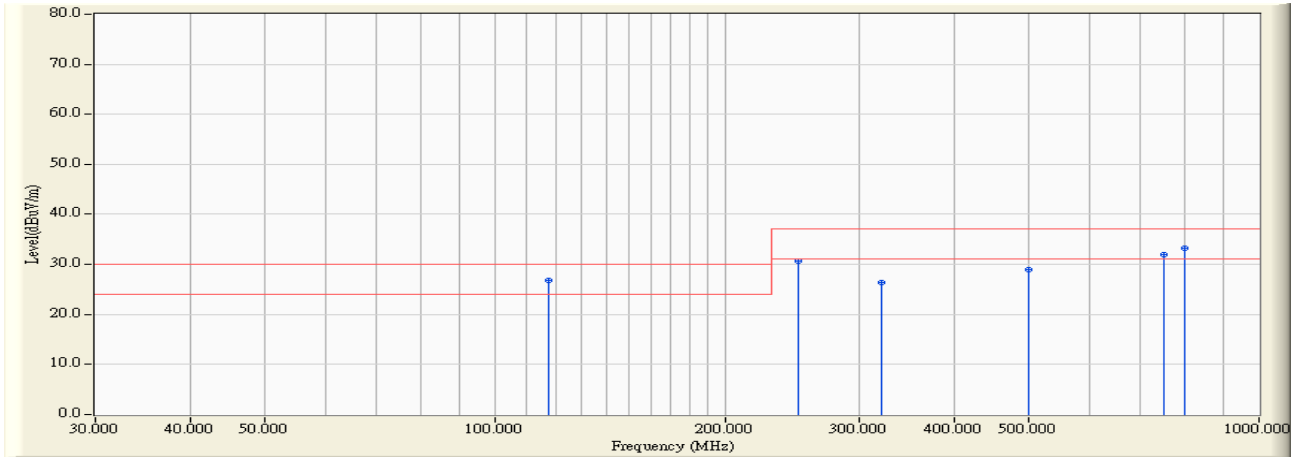


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	117.500	14.796	12.000	26.796	-3.204	30.000	QUASPEAK
2		250.000	15.948	14.800	30.748	-6.252	37.000	QUASPEAK
3		320.000	17.699	8.600	26.299	-10.701	37.000	QUASPEAK
4		500.000	21.905	7.000	28.905	-8.095	37.000	QUASPEAK
5		750.000	25.180	6.800	31.980	-5.020	37.000	QUASPEAK
6		800.000	25.808	7.400	33.208	-3.792	37.000	QUASPEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Site : OATS-2	Time : 2011/02/15 - 00:03
Limit : CISPR_B_10M_QP	Margin : 6
EUT : Network Camera	Probe : Site2_CBL6112_10M_0811 - VERTICAL
Power : AC 230V/50Hz	Note : Mode 2

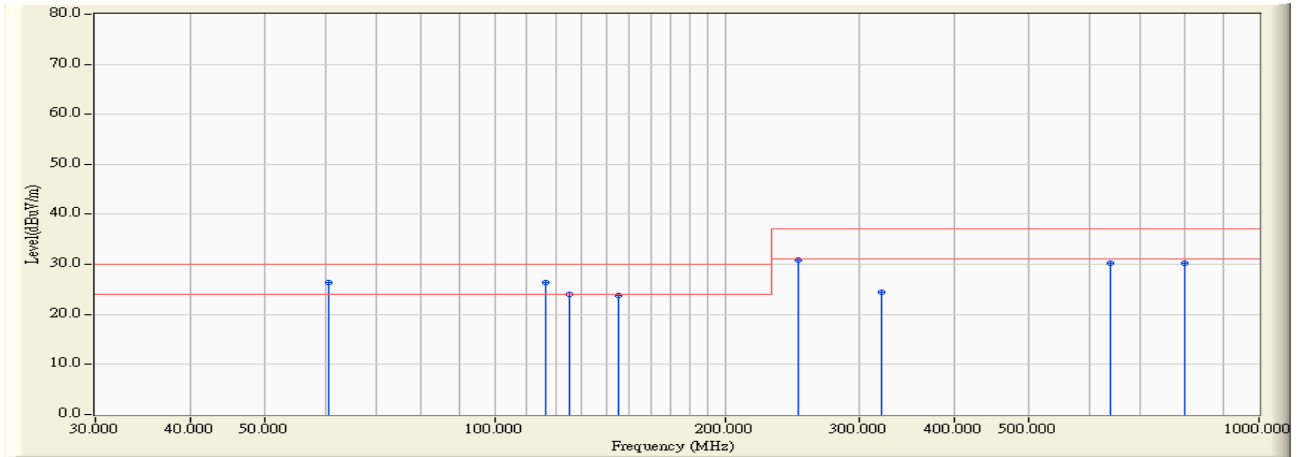


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	60.600	7.676	18.800	26.476	-3.524	30.000	QUASIPeAK
2		116.550	14.767	11.600	26.367	-3.633	30.000	QUASIPeAK
3		125.000	14.741	9.300	24.041	-5.959	30.000	QUASIPeAK
4		145.260	13.912	9.800	23.712	-6.288	30.000	QUASIPeAK
5		250.000	15.948	14.900	30.848	-6.152	37.000	QUASIPeAK
6		320.000	17.699	6.800	24.499	-12.501	37.000	QUASIPeAK
7		640.000	23.899	6.400	30.299	-6.701	37.000	QUASIPeAK
8		800.000	25.808	4.500	30.308	-6.692	37.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Site : 9x6x6_Chamber	Time: 2011/02/15 - 03:20
Limit: EN55022_B_(Above_1G)	Margin: 0
Probe: 9120D_1-18G_Horn	Polarity: Horizontal
EUT : Network Camera	Power: AC 230V/50Hz
Note : Mode 1	

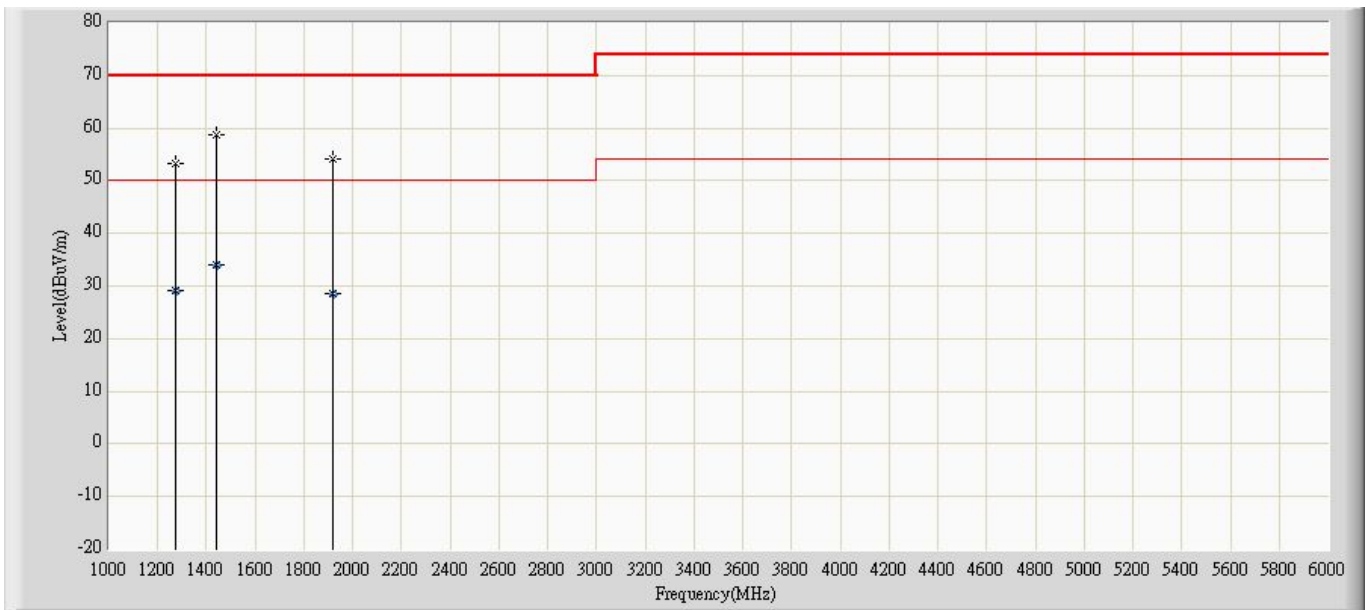


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			1270.000	53.283	58.880	-16.717	70.000	-5.598	PK
2			1270.000	29.093	34.690	-20.907	50.000	-5.598	AV
3		*	1440.000	58.723	63.700	-11.277	70.000	-4.978	PK
4			1440.000	34.153	39.130	-15.847	50.000	-4.978	AV
5			1921.000	54.056	57.990	-15.944	70.000	-3.934	PK
6			1921.000	28.486	32.420	-21.514	50.000	-3.934	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

Site : 9x6x6_Chamber	Time: 2011/02/15 - 03:13
Limit: EN55022_B_(Above_1G)	Margin: 0
Probe: 9120D_1-18G_Horn	Polarity: Vertical
EUT : Network Camera	Power: AC 230V/50Hz
Note : Mode 1	

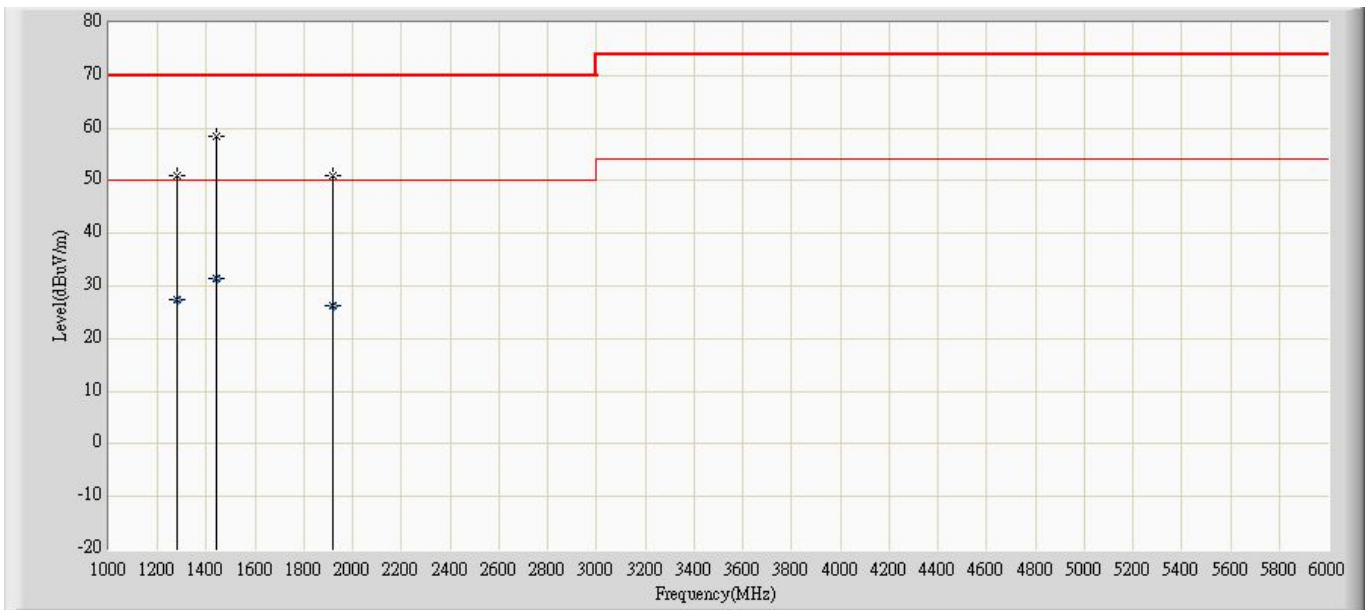


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			1280.000	51.051	56.610	-18.949	70.000	-5.559	PK
2			1280.000	27.271	32.830	-22.729	50.000	-5.559	AV
3		*	1440.000	58.473	63.450	-11.527	70.000	-4.978	PK
4			1440.000	31.523	36.500	-18.477	50.000	-4.978	AV
5			1921.000	51.026	54.960	-18.974	70.000	-3.934	PK
6			1921.000	26.246	30.180	-23.754	50.000	-3.934	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

Site : 9x6x6_Chamber	Time: 2011/02/15 - 02:59
Limit: EN55022_B_(Above_1G)	Margin: 0
Probe: 9120D_1-18G_Horn	Polarity: Horizontal
EUT : Network Camera	Power: AC 230V/50Hz
Note : Mode 2	

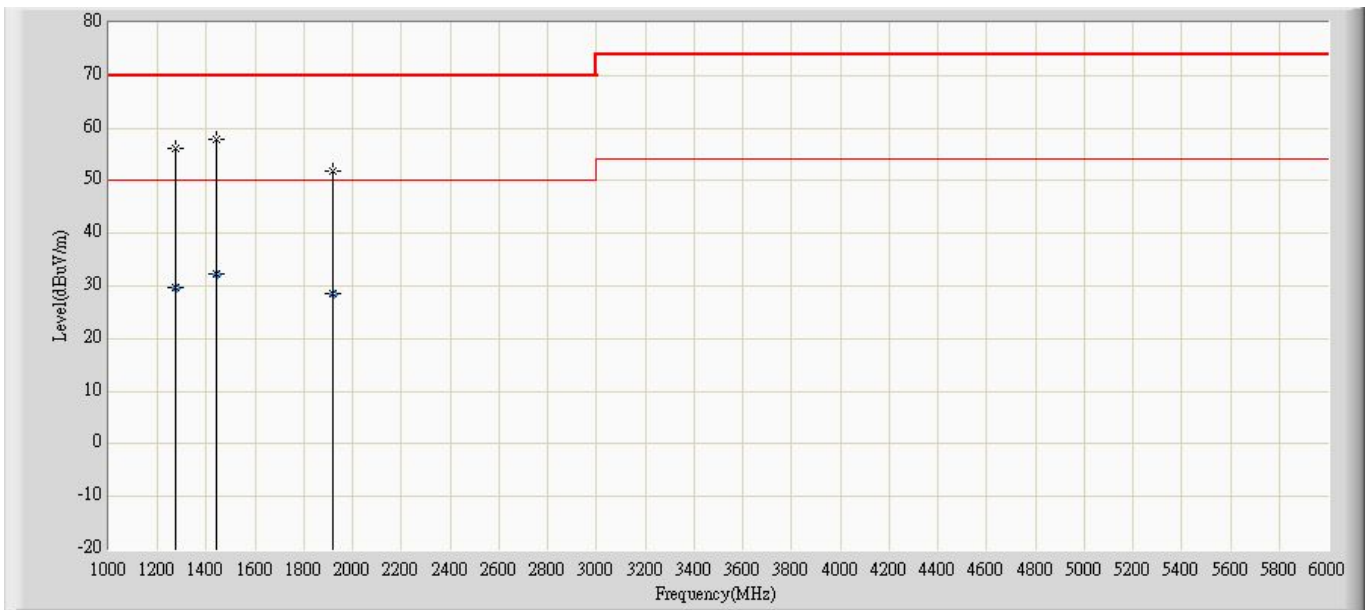


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			1270.000	56.203	61.800	-13.797	70.000	-5.598	PK
2			1270.000	29.663	35.260	-20.337	50.000	-5.598	AV
3		*	1440.000	57.933	62.910	-12.067	70.000	-4.978	PK
4			1440.000	32.203	37.180	-17.797	50.000	-4.978	AV
5			1921.000	51.836	55.770	-18.164	70.000	-3.934	PK
6			1921.000	28.456	32.390	-21.544	50.000	-3.934	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

Site : 9x6x6_Chamber	Time: 2011/02/15 - 03:04
Limit: EN55022_B_(Above_1G)	Margin: 0
Probe: 9120D_1-18G_Horn	Polarity: Vertical
EUT : Network Camera	Power: AC 230V/50Hz
Note : Mode 2	

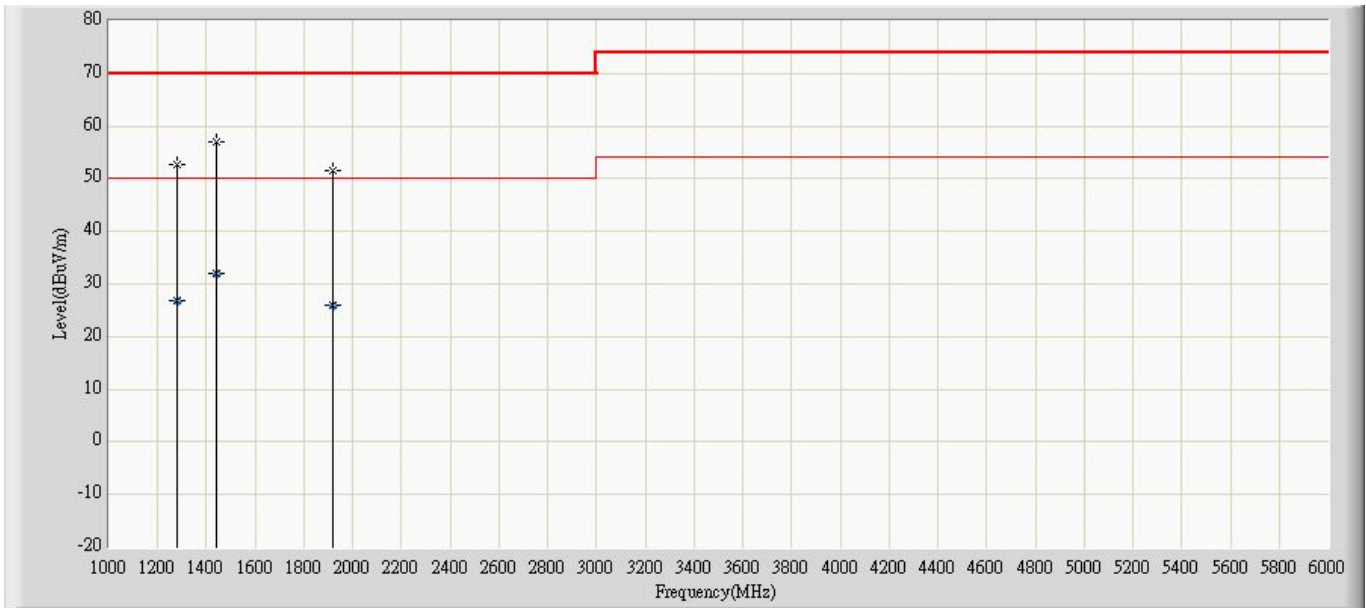

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			1280.000	52.671	58.230	-17.329	70.000	-5.559	PK
2			1280.000	26.971	32.530	-23.029	50.000	-5.559	AV
3		*	1440.000	56.993	61.970	-13.007	70.000	-4.978	PK
4			1440.000	31.873	36.850	-18.127	50.000	-4.978	AV
5			1921.000	51.576	55.510	-18.424	70.000	-3.934	PK
6			1921.000	25.876	29.810	-24.124	50.000	-3.934	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

5.7. Test Photograph

Test Mode : Mode 1: CF1205-E, Normal Operation

Description : Front View of Radiated Test




Test Mode : Mode 1: CF1205-E, Normal Operation

Description : Back View of Radiated Test



Test Mode : Mode 1: CF1205-E, Normal Operation

Description : Front View of High Frequency Radiated Test

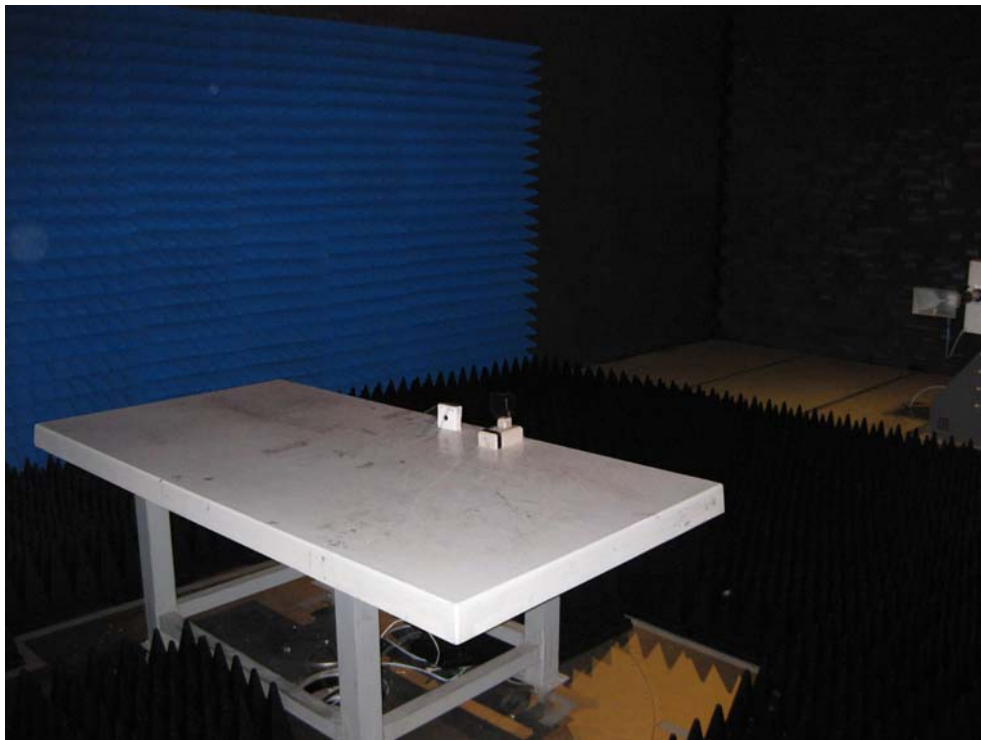

Test Mode : Mode 2: AF1205-B, Normal Operation

Description : Front View of Radiated Test




Test Mode : Mode 2: AF1205-B, Normal Operation

Description : Back View of Radiated Test



Test Mode : Mode 2: AF1205-B, Normal Operation

Description : Front View of High Frequency Radiated Test

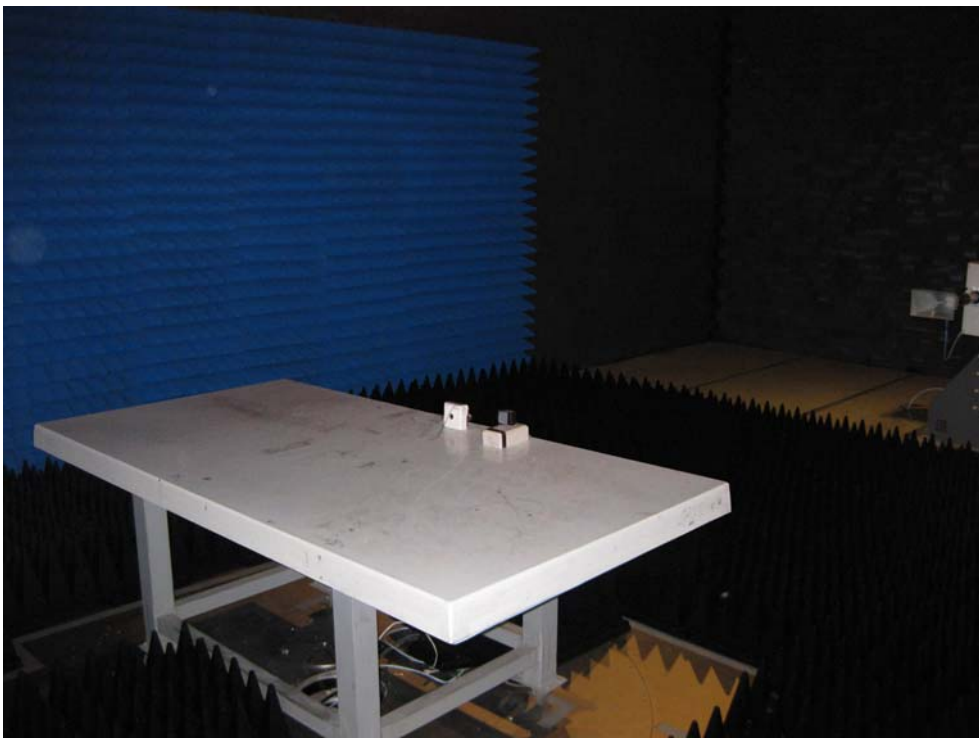


6. Harmonic Current Emission

6.1. Test Specification

According to EMC Standard : EN 61000-3-2

6.2. Test Setup

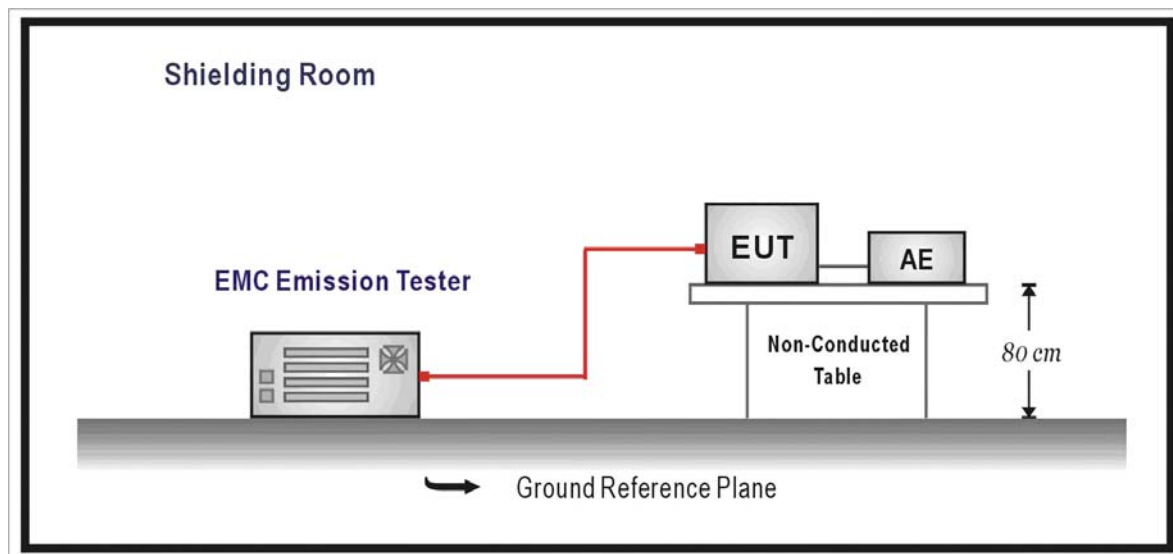

6.3. Limit

(a) Limits of Class A Harmonics Currents

Harmonics Order n	Maximum Permissible harmonic current A	Harmonics Order n	Maximum Permissible harmonic current A
Odd harmonics		Even harmonics	
3	2.30	2	1.08
5	1.14	4	0.43
7	0.77	6	0.30
9	0.40	8 ≤ n ≤ 40	0.23 * 8/n
11	0.33		
13	0.21		
15 ≤ n ≤ 39	0.15 * 15/n		

(b) Limits of Class B Harmonics Currents

For Class B equipment, the harmonic of the input current shall not exceed the maximum permissible values given in table that is the limit of Class A multiplied by a factor of 1.5.

(c) Limits of Class C Harmonics Currents

Harmonics Order n	Maximum Permissible harmonic current Expressed as a percentage of the input current at the fundamental frequency %
2	2
3	$30 \cdot \lambda^*$
5	10
7	7
9	5
$11 \leq n \leq 39$ (odd harmonics only)	3

* λ is the circuit power factor

(d) Limits of Class D Harmonics Currents

Harmonics Order n	Maximum Permissible harmonic current per watt mA/W	Maximum Permissible harmonic current A
3	3.4	2.30
5	1.9	1.14
7	1.0	0.77
9	0.5	0.40
11	0.35	0.33
$11 \leq n \leq 39$ (odd harmonics only)	$3.85/n$	See limit of Class A

6.4. Test Procedure

The EUT is supplied in series with power analyzer from a power source having the same normal voltage and frequency as the rated supply voltage and the equipment under test. And the rated voltage at the supply voltage of EUT of 0.94 times and 1.06 times shall be performed.

6.5. Deviation from Test Standard


No deviation.

6.6. Test Result

Product	Network Camera		
Test Item	Power Harmonics		
Test Mode	Mode 1: CF1205-E, Normal Operation		
Date of Test	2011/02/17	Test Site	No.3 Shielded Room


Test Result: Pass Source qualification: Normal

Current & voltage waveforms

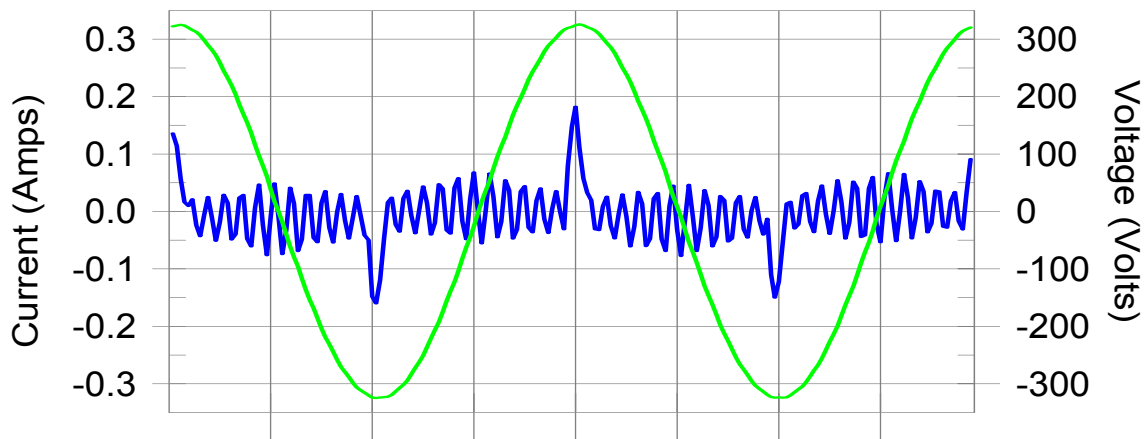

Harmonics and Class A limit line

European Limits

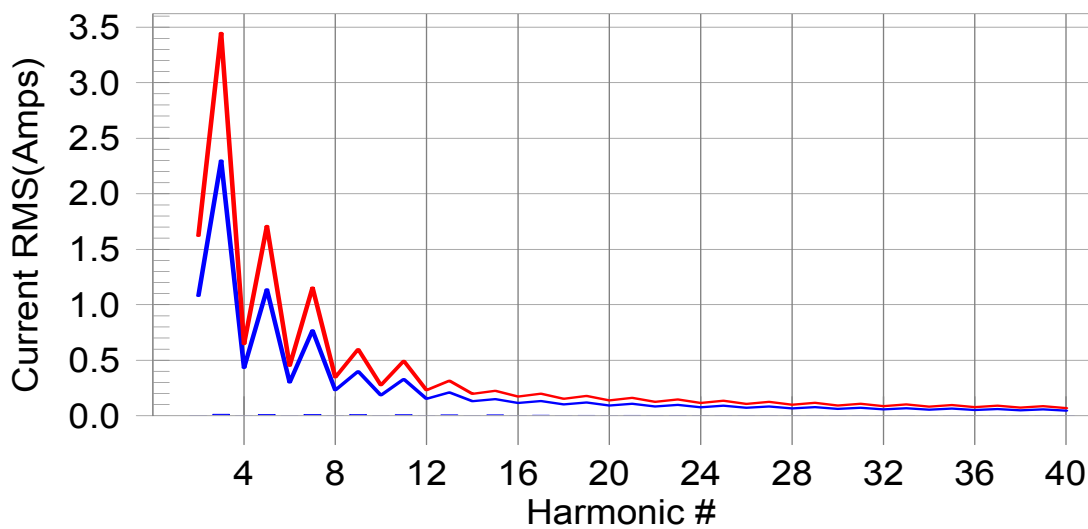

Test result: Pass Worst harmonic was #15 with 4.82% of the limit.

Test Result: Pass Source qualification: Normal

THC(A): 0.03 I-THD(%): 190.01 POHC(A): 0.005 POHC Limit(A): 0.251
 Highest parameter values during test:
 V_RMS (Volts): 229.68 Frequency(Hz): 50.00
 I_Peak (Amps): 0.228 I_RMS (Amps): 0.049
 I_Fund (Amps): 0.016 Crest Factor: 4.685
 Power (Watts): 3.4 Power Factor: 0.297

Harm#	Harms(avg)	100%Limit	%of Limit	Harms(max)	150%Limit	%of Limit	Status
2	0.000	1.080	0.0	0.001	1.620	0.03	Pass
3	0.013	2.300	0.6	0.014	3.450	0.39	Pass
4	0.000	0.430	0.1	0.001	0.645	0.09	Pass
5	0.013	1.140	1.1	0.013	1.710	0.76	Pass
6	0.000	0.300	0.2	0.001	0.450	0.17	Pass
7	0.012	0.770	1.6	0.012	1.155	1.06	Pass
8	0.000	0.230	0.2	0.001	0.345	0.16	Pass
9	0.011	0.400	2.7	0.011	0.600	1.86	Pass
10	0.000	0.184	0.2	0.001	0.276	0.20	Pass
11	0.010	0.330	3.0	0.010	0.495	2.02	Pass
12	0.000	0.153	0.2	0.001	0.230	0.24	Pass
13	0.009	0.210	4.1	0.009	0.315	2.75	Pass
14	0.000	0.131	0.3	0.001	0.197	0.26	Pass
15	0.007	0.150	4.8	0.007	0.225	3.27	Pass
16	0.000	0.115	0.3	0.000	0.173	0.28	Pass
17	0.006	0.132	4.5	0.006	0.199	3.04	Pass
18	0.000	0.102	0.3	0.000	0.153	0.31	Pass
19	0.005	0.118	4.0	0.005	0.178	2.71	Pass
20	0.000	0.092	0.3	0.000	0.138	0.29	Pass
21	0.004	0.107	3.3	0.004	0.161	2.28	Pass
22	0.000	0.084	0.3	0.000	0.125	0.31	Pass
23	0.003	0.098	2.7	0.003	0.147	1.84	Pass
24	0.000	0.077	0.3	0.000	0.115	0.32	Pass
25	0.002	0.090	2.0	0.002	0.135	1.41	Pass
26	0.000	0.071	0.3	0.000	0.106	0.27	Pass
27	0.001	0.083	1.4	0.001	0.125	1.02	Pass
28	0.000	0.066	0.3	0.000	0.099	0.28	Pass
29	0.001	0.078	1.1	0.001	0.116	0.77	Pass
30	0.000	0.061	0.3	0.000	0.092	0.28	Pass
31	0.001	0.073	0.9	0.001	0.109	0.67	Pass
32	0.000	0.058	0.2	0.000	0.086	0.25	Pass
33	0.001	0.068	0.9	0.001	0.102	0.68	Pass
34	0.000	0.054	0.2	0.000	0.081	0.21	Pass
35	0.001	0.064	1.0	0.001	0.096	0.73	Pass
36	0.000	0.051	0.2	0.000	0.077	0.20	Pass
37	0.001	0.061	1.0	0.001	0.091	0.72	Pass
38	0.000	0.048	0.2	0.000	0.073	0.22	Pass
39	0.001	0.058	0.9	0.001	0.087	0.66	Pass
40	0.000	0.046	0.3	0.000	0.069	0.25	Pass

1.Dynamic limits were applied for this test. The highest harmonics values in the above table may not occur at the same window as the maximum harmonics/limit ratio.

2:According to EN61000-3-2 paragraph 7 the note 1 and 2 are valid for all applications having an active input power >75W. Others the result should be pass.

Product	Network Camera		
Test Item	Power Harmonics		
Test Mode	Mode 2: AF1205-B, Normal Operation		
Date of Test	2011/02/17	Test Site	No.3 Shielded Room


Test Result: Pass Source qualification: Normal

Current & voltage waveforms



Harmonics and Class A limit line

European Limits

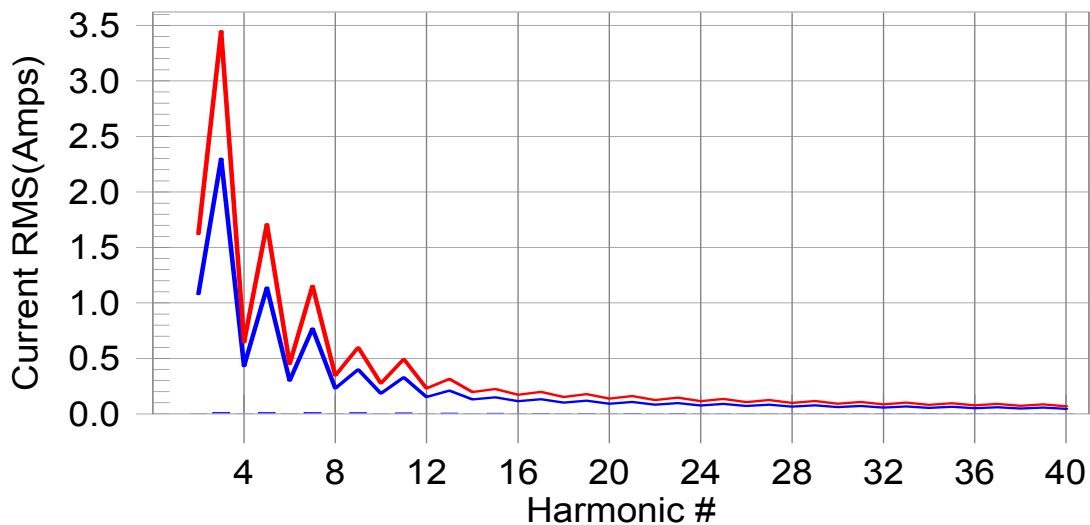

Test result: Pass Worst harmonic was #15 with 4.52% of the limit.

Test Result: Pass Source qualification: Normal
 THC(A): 0.03 I-THD(%): 209.22 POHC(A): 0.004 POHC Limit(A): 0.251
 Highest parameter values during test:

V_RMS (Volts):	229.67	Frequency(Hz):	50.00
I_Peak (Amps):	0.248	I_RMS (Amps):	0.037
I_Fund (Amps):	0.015	Crest Factor:	7.018
Power (Watts):	3.5	Power Factor:	0.418

Harm#	Harms(avg)	100%Limit	%of Limit	Harms(max)	150%Limit	%of Limit	Status
2	0.000	1.080	0.0	0.001	1.620	0.04	Pass
3	0.014	2.300	0.6	0.014	3.450	0.40	Pass
4	0.000	0.430	0.1	0.001	0.645	0.10	Pass
5	0.013	1.140	1.1	0.013	1.710	0.78	Pass
6	0.001	0.300	0.2	0.001	0.450	0.18	Pass
7	0.012	0.770	1.6	0.012	1.155	1.07	Pass
8	0.000	0.230	0.2	0.001	0.345	0.18	Pass
9	0.011	0.400	2.7	0.011	0.600	1.86	Pass
10	0.000	0.184	0.2	0.001	0.276	0.20	Pass
11	0.010	0.330	2.9	0.010	0.495	1.98	Pass
12	0.000	0.153	0.3	0.001	0.230	0.26	Pass
13	0.008	0.210	3.9	0.008	0.315	2.65	Pass
14	0.000	0.131	0.3	0.000	0.197	0.25	Pass
15	0.007	0.150	4.5	0.007	0.225	3.06	Pass
16	0.000	0.115	0.3	0.000	0.173	0.26	Pass
17	0.005	0.132	4.1	0.006	0.199	2.78	Pass
18	0.000	0.102	0.3	0.000	0.153	0.29	Pass
19	0.004	0.118	3.5	0.004	0.178	2.38	Pass
20	0.000	0.092	0.3	0.000	0.138	0.25	Pass
21	0.003	0.107	2.9	0.003	0.161	1.96	Pass
22	0.000	0.084	0.3	0.000	0.125	0.23	Pass
23	0.002	0.098	2.2	0.002	0.147	1.54	Pass
24	0.000	0.077	0.2	0.000	0.115	0.23	Pass
25	0.002	0.090	1.7	0.002	0.135	1.17	Pass
26	0.000	0.071	0.2	0.000	0.106	0.19	Pass
27	0.001	0.083	1.3	0.001	0.125	0.90	Pass
28	0.000	0.066	0.2	0.000	0.099	0.17	Pass
29	0.001	0.078	1.0	0.001	0.116	0.72	Pass
30	0.000	0.061	0.2	0.000	0.092	0.16	Pass
31	0.001	0.073	0.9	0.001	0.109	0.62	Pass
32	0.000	0.058	0.2	0.000	0.086	0.15	Pass
33	0.001	0.068	0.8	0.001	0.102	0.55	Pass
34	0.000	0.054	0.1	0.000	0.081	0.15	Pass
35	0.000	0.064	0.7	0.000	0.096	0.50	Pass
36	0.000	0.051	0.1	0.000	0.077	0.15	Pass
37	0.000	0.061	0.5	0.000	0.091	0.40	Pass
38	0.000	0.048	0.2	0.000	0.073	0.15	Pass
39	0.000	0.058	0.4	0.000	0.087	0.34	Pass
40	0.000	0.046	0.2	0.000	0.069	0.17	Pass

1.Dynamic limits were applied for this test. The highest harmonics values in the above table may not occur at the same window as the maximum harmonics/limit ratio.

2:According to EN61000-3-2 paragraph 7 the note 1 and 2 are valid for all applications having an active input power >75W. Others the result should be pass.

6.7. Test Photograph

Test Mode : Mode 1: CF1205-E, Normal Operation

Description : Power Harmonics Test Setup



Test Mode : Mode 2: AF1205-B, Normal Operation

Description : Power Harmonics Test Setup




7. Voltage Fluctuation and Flicker

7.1. Test Specification

According to EMC Standard : EN 61000-3-3

7.2. Test Setup

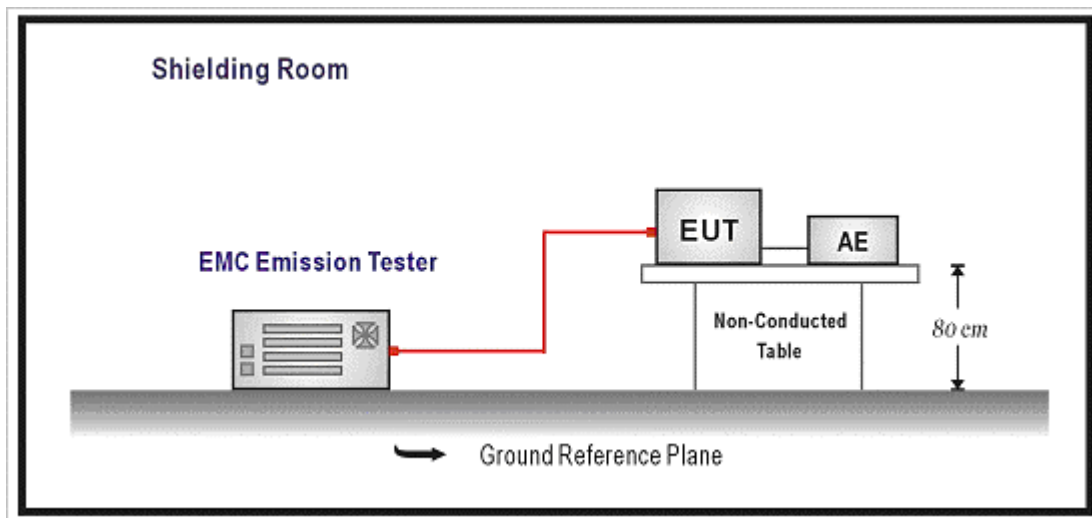

7.3. Limit

The following limits apply:

- the value of P_{st} shall not be greater than 1.0;
 - the value of P_{1t} shall not be greater than 0.65;
 - the value of $d(t)$ during a voltage change shall not exceed 3.3 % for more than 500 ms;
 - the relative steady-state voltage change, d_c , shall not exceed 3.3 %;
 - the maximum relative voltage change, d_{max} , shall not exceed;
- a) 4 % without additional conditions;
 - b) 6 % for equipment which is:
 - switched manually, or
 - switched automatically more frequently than twice per day, and also has either a delayed restart (the delay being not less than a few tens of seconds), or manual restart, after a power supply interruption.

NOTE The cycling frequency will be further limited by the P_{st} and P_{1t} limit.

For example: a d_{max} of 6% producing a rectangular voltage change characteristic twice per hour will give a P_{1t} of about 0.65.

- c) 7 % for equipment which is:
- attended whilst in use (for example: hair dryers, vacuum cleaners, kitchen equipment such as mixers, garden equipment such as lawn mowers, portable tools such as electric drills), or
 - switched on automatically, or is intended to be switched on manually, no more than twice per day, and also has either a delayed restart (the delay being not less than a few tens of seconds) or manual restart, after a power supply interruption.

P_{st} and P_{1t} requirements shall not be applied to voltage changes caused by manual switching.

7.4. Test Procedure

The EUT is supplied in series with power analyzer from a power source having the same normal voltage and frequency as the rated supply voltage and the equipment under test. And the rated voltage at the supply voltage of EUT of 0.94 times and 1.06 times shall be performed.

7.5. Deviation from Test Standard

No deviation.

7.6. Test Result


Product	Network Camera		
Test Item	Voltage Fluctuation and Flicker		
Test Mode	Mode 1: CF1205-E, Normal Operation		
Date of Test	2011/02/17	Test Site	No.3 Shielded Room

Test Result: Pass


Status: Test Completed

Pstj and limit line

European Limits

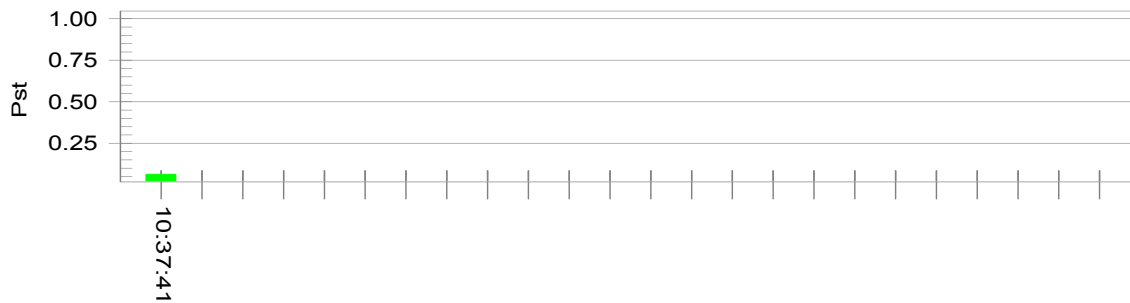

Plt and limit line

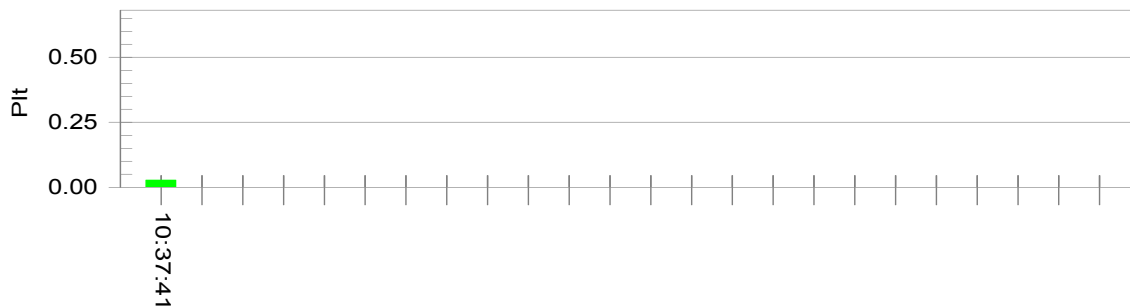

Parameter values recorded during the test:

Vrms at the end of test (Volt):	229.61		
Highest dt (%):	0.00	Test limit (%):	3.30 Pass
Time(mS) > dt:	0.0	Test limit (mS):	500.0 Pass
Highest dc (%):	0.00	Test limit (%):	3.30 Pass
Highest dmax (%):	0.00	Test limit (%):	4.00 Pass
Highest Pst (10 min. period):	0.064	Test limit:	1.000 Pass
Highest Plt (2 hr. period):	0.028	Test limit:	0.650 Pass


Product	Network Camera		
Test Item	Voltage Fluctuation and Flicker		
Test Mode	Mode 2: AF1205-B, Normal Operation		
Date of Test	2011/02/17	Test Site	No.3 Shielded Room

Test Result: Pass

Status: Test Completed

Pstj and limit line

European Limits

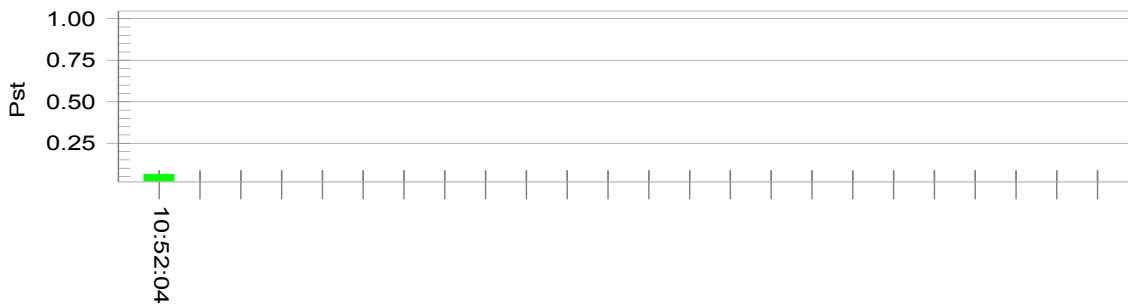

Plt and limit line



Parameter values recorded during the test:

Vrms at the end of test (Volt):	229.58		
Highest dt (%):	0.00	Test limit (%):	3.30 Pass
Time(mS) > dt:	0.0	Test limit (mS):	500.0 Pass
Highest dc (%):	0.00	Test limit (%):	3.30 Pass
Highest dmax (%):	0.00	Test limit (%):	4.00 Pass
Highest Pst (10 min. period):	0.064	Test limit:	1.000 Pass
Highest Plt (2 hr. period):	0.028	Test limit:	0.650 Pass

7.7. Test Photograph

Test Mode : Mode 1: CF1205-E, Normal Operation

Description : Flicker Test Setup



Test Mode : Mode 2: AF1205-B, Normal Operation

Description : Flicker Test Setup




8. Electrostatic Discharge

8.1. Test Specification

According to Standard : IEC 61000-4-2

8.2. Test Setup

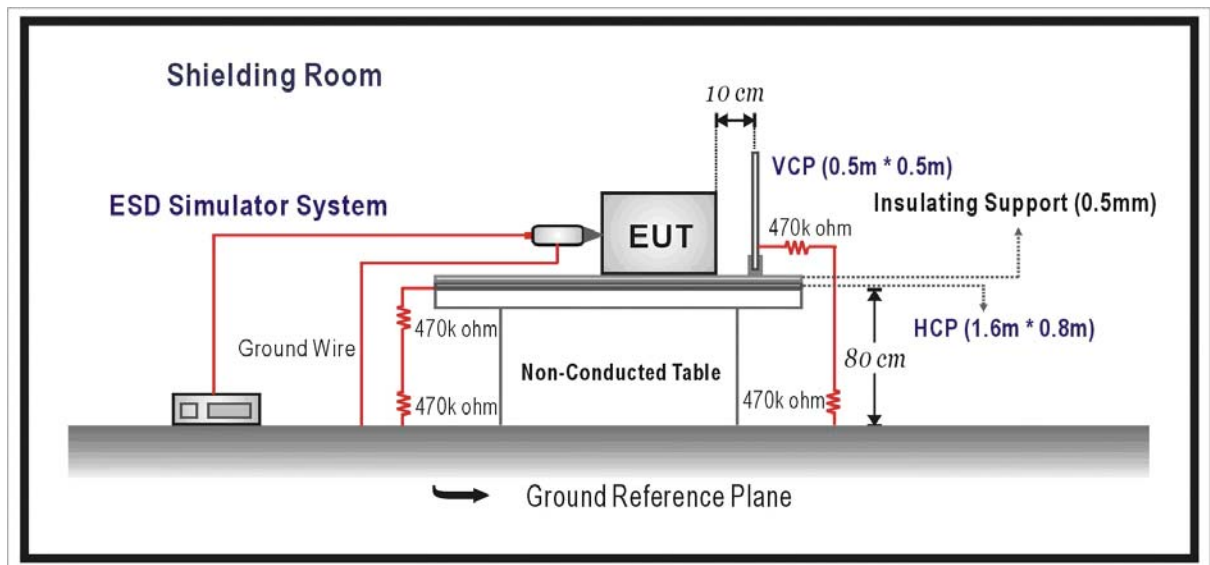

8.3. Limit

Item	Environmental Phenomena	Units	Test Specification	Performance Criteria
Enclosure Port				
	Electrostatic Discharge	kV(Charge Voltage)	±8 Air Discharge ±4 Contact Discharge	B

8.4. Test Procedure

Direct application of discharges to the EUT:

Contact discharge was applied only to conductive surfaces of the EUT.

Air discharges were applied only to non-conductive surfaces of the EUT.

During the test, it was performed with single discharges. For the single discharge time between successive single discharges will be keep longer 1 second. It was at least ten single discharges with positive and negative at the same selected point.

The selected point, which was performed with electrostatic discharge, was marked on the red label of the EUT.

Indirect application of discharges to the EUT:

Vertical Coupling Plane (VCP):

The coupling plane, of dimensions 0.5m x 0.5m, is placed parallel to, and positioned at a distance 0.1m from, the EUT, with the Discharge Electrode touching the coupling plane.

The four faces of the EUT will be performed with electrostatic discharge. It was at least ten single discharges with positive and negative at the same selected point.

Horizontal Coupling Plane (HCP):

The coupling plane is placed under to the EUT. The generator shall be positioned vertically at a distance of 0.1m from the EUT, with the Discharge Electrode touching the coupling plane.

The four faces of the EUT will be performed with electrostatic discharge. It was at least ten single discharges with positive and negative at the same selected point.

8.5. Deviation from Test Standard

No deviation.

8.6. Test Result

Product	Network Camera		
Test Item	Electrostatic Discharge		
Test Mode	Mode 1		
Date of Test	2011/02/17	Test Site	No.6 Shielded Room

Item	Amount of Discharge	Voltage	Required Criteria	Complied To Criteria (A,B,C)	Results
Air Discharge	10	+8kV	B	A	Pass
	10	-8kV	B	A	Pass
Contact Discharge	25	+4kV	B	A	Pass
	25	-4kV	B	A	Pass
Indirect Discharge (HCP)	25	+4kV	B	A	Pass
	25	-4kV	B	A	Pass
Indirect Discharge (VCP Front)	25	+4kV	B	A	Pass
	25	-4kV	B	A	Pass
Indirect Discharge (VCP Left)	25	+4kV	B	A	Pass
	25	-4kV	B	A	Pass
Indirect Discharge (VCP Back)	25	+4kV	B	A	Pass
	25	-4kV	B	A	Pass
Indirect Discharge (VCP Right)	25	+4kV	B	A	Pass
	25	-4kV	B	A	Pass

Note:

The testing performed is from lowest level up to the highest level as required by standard, but only highest level is shown on the report.

NR: No Requirement

- Meet criteria A: Operate as intended during and after the test
- Meet criteria B: Operate as intended after the test
- Meet criteria C: Loss/Error of function
- Additional Information
 - EUT stopped operation and could / could not be reset by operator at ____ kV.
 - No false alarms or other malfunctions were observed during or after the test.

Remark:

The Contact discharges were applied at least total 200 discharges at a minimum of four test points.

Product	Network Camera		
Test Item	Electrostatic Discharge		
Test Mode	Mode 2		
Date of Test	2011/02/17	Test Site	No.6 Shielded Room

Item	Amount of Discharge	Voltage	Required Criteria	Complied To Criteria (A,B,C)	Results
Air Discharge	10	+8kV	B	A	Pass
	10	-8kV	B	A	Pass
Contact Discharge	25	+4kV	B	A	Pass
	25	-4kV	B	A	Pass
Indirect Discharge (HCP)	25	+4kV	B	A	Pass
	25	-4kV	B	A	Pass
Indirect Discharge (VCP Front)	25	+4kV	B	A	Pass
	25	-4kV	B	A	Pass
Indirect Discharge (VCP Left)	25	+4kV	B	A	Pass
	25	-4kV	B	A	Pass
Indirect Discharge (VCP Back)	25	+4kV	B	A	Pass
	25	-4kV	B	A	Pass
Indirect Discharge (VCP Right)	25	+4kV	B	A	Pass
	25	-4kV	B	A	Pass

Note:

The testing performed is from lowest level up to the highest level as required by standard, but only highest level is shown on the report.

NR: No Requirement

- Meet criteria A: Operate as intended during and after the test
- Meet criteria B: Operate as intended after the test
- Meet criteria C: Loss/Error of function
- Additional Information
 - EUT stopped operation and could / could not be reset by operator at ____ kV.
 - No false alarms or other malfunctions were observed during or after the test.

Remark:

The Contact discharges were applied at least total 200 discharges at a minimum of four test points.

8.7. Test Photograph

Test Mode : Mode 1

Description : ESD Test Setup



Test Mode : Mode 2

Description : ESD Test Setup




9. Radiated Susceptibility

9.1. Test Specification

According to Standard : IEC 61000-4-3

9.2. Test Setup

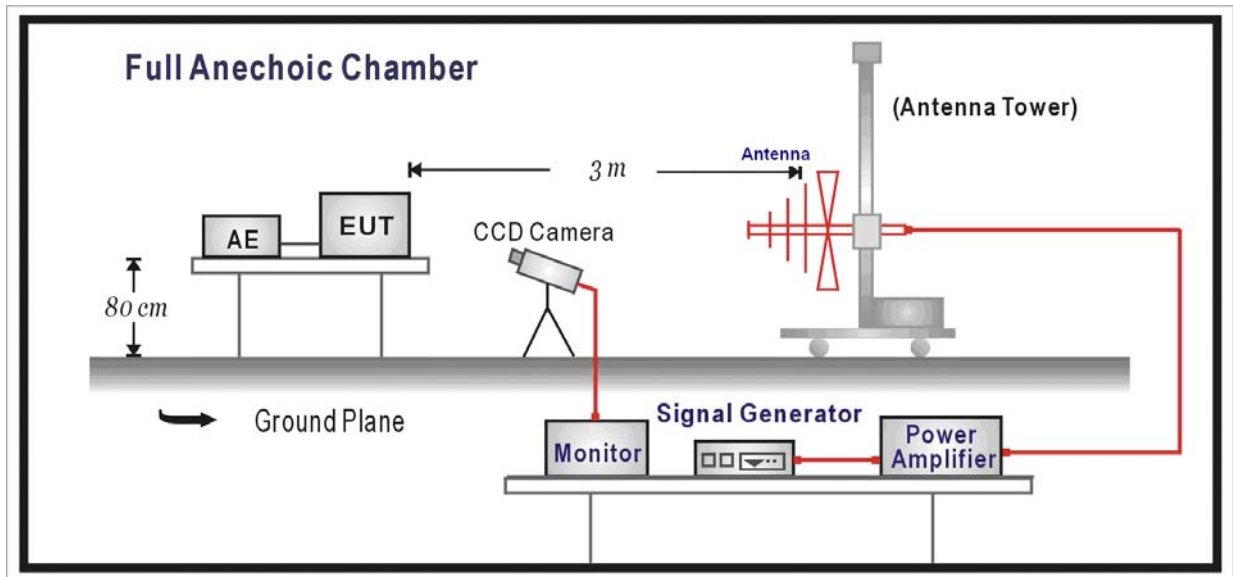

9.3. Limit

Item	Environmental Phenomena	Units	Test Specification	Performance Criteria
Enclosure Port				
	Radio-Frequency Electromagnetic Field Amplitude Modulated	MHz V/m(Un-modulated, rms) % AM (1kHz)	80-1000 3 80	A

9.4. Test Procedure

The EUT and load, which are placed on a table that is 0.8 meter above ground, are placed with one coincident with the calibration plane such that the distance from antenna to the EUT was 3 meters.

Both horizontal and vertical polarization of the antenna and four sides of the EUT are set on measurement.

In order to judge the EUT performance, a CCD camera is used to monitor EUT screen.

All the scanning conditions are as follows:

Condition of Test	Remarks
1. Field Strength	3 V/m Level 2
2. Radiated Signal	AM 80% Modulated with 1kHz
3. Scanning Frequency	80MHz - 1000MHz
4. Dwell Time	3 Seconds
5. Frequency step size Δf :	1%
6. The rate of Swept of Frequency	1.5×10^{-3} decades/s

9.5. Deviation from Test Standard

No deviation.

9.6. Test Result

Product	Network Camera		
Test Item	Radiated susceptibility		
Test Mode	Mode 1		
Date of Test	2011/02/17	Test Site	Chamber5

Frequency (MHz)	Position (Angle)	Polarity (H or V)	Field Strength (V/m)	Required Criteria	Complied To Criteria (A,B,C)	Results
80-1000	FRONT	H	3	A	A	PASS
80-1000	FRONT	V	3	A	A	PASS
80-1000	BACK	H	3	A	A	PASS
80-1000	BACK	V	3	A	A	PASS
80-1000	RIGHT	H	3	A	A	PASS
80-1000	RIGHT	V	3	A	A	PASS
80-1000	LEFT	H	3	A	A	PASS
80-1000	LEFT	V	3	A	A	PASS
80-1000	UP	H	3	A	A	PASS
80-1000	UP	V	3	A	A	PASS
80-1000	DOWN	H	3	A	A	PASS
80-1000	DOWN	V	3	A	A	PASS

Note:

The testing performed is from lowest level up to the highest level as required by standard, but only highest level is shown on the report.

- Meet criteria A: Operate as intended during and after the test
- Meet criteria B: Operate as intended after the test
- Meet criteria C: Loss/Error of function
- Additional Information
 - There was no observable degradation in performance.
 - EUT stopped operation and could / could not be reset by operator at _____ V/m at frequency _____ MHz.
- No false alarms or other malfunctions were observed during or after the test.

Product	Network Camera		
Test Item	Radiated susceptibility		
Test Mode	Mode 2		
Date of Test	2011/02/17	Test Site	Chamber5

Frequency (MHz)	Position (Angle)	Polarity (H or V)	Field Strength (V/m)	Required Criteria	Complied To Criteria (A,B,C)	Results
80-1000	FRONT	H	3	A	A	PASS
80-1000	FRONT	V	3	A	A	PASS
80-1000	BACK	H	3	A	A	PASS
80-1000	BACK	V	3	A	A	PASS
80-1000	RIGHT	H	3	A	A	PASS
80-1000	RIGHT	V	3	A	A	PASS
80-1000	LEFT	H	3	A	A	PASS
80-1000	LEFT	V	3	A	A	PASS
80-1000	UP	H	3	A	A	PASS
80-1000	UP	V	3	A	A	PASS
80-1000	DOWN	H	3	A	A	PASS
80-1000	DOWN	V	3	A	A	PASS

Note:


The testing performed is from lowest level up to the highest level as required by standard, but only highest level is shown on the report.

- Meet criteria A: Operate as intended during and after the test
- Meet criteria B: Operate as intended after the test
- Meet criteria C: Loss/Error of function
- Additional Information
 - There was no observable degradation in performance.
 - EUT stopped operation and could / could not be reset by operator at _____ V/m at frequency _____MHz.
- No false alarms or other malfunctions were observed during or after the test.

9.7. Test Photograph


Test Mode : Mode 1

Description : Radiated Susceptibility Test Setup

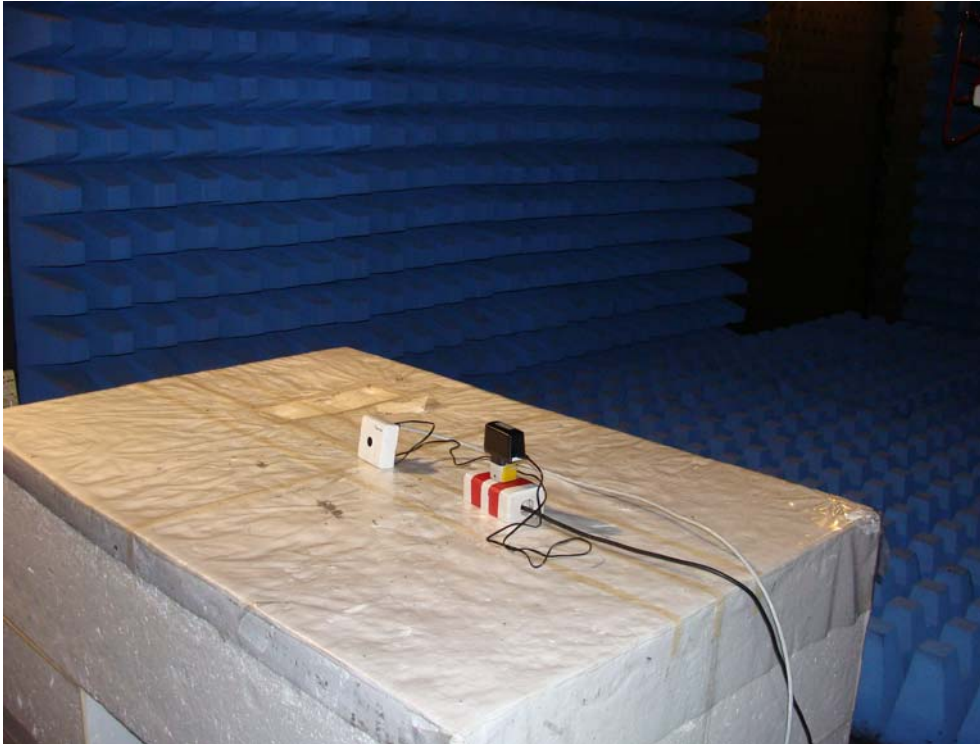

Test Mode : Mode 2

Description : Radiated Susceptibility Test Setup

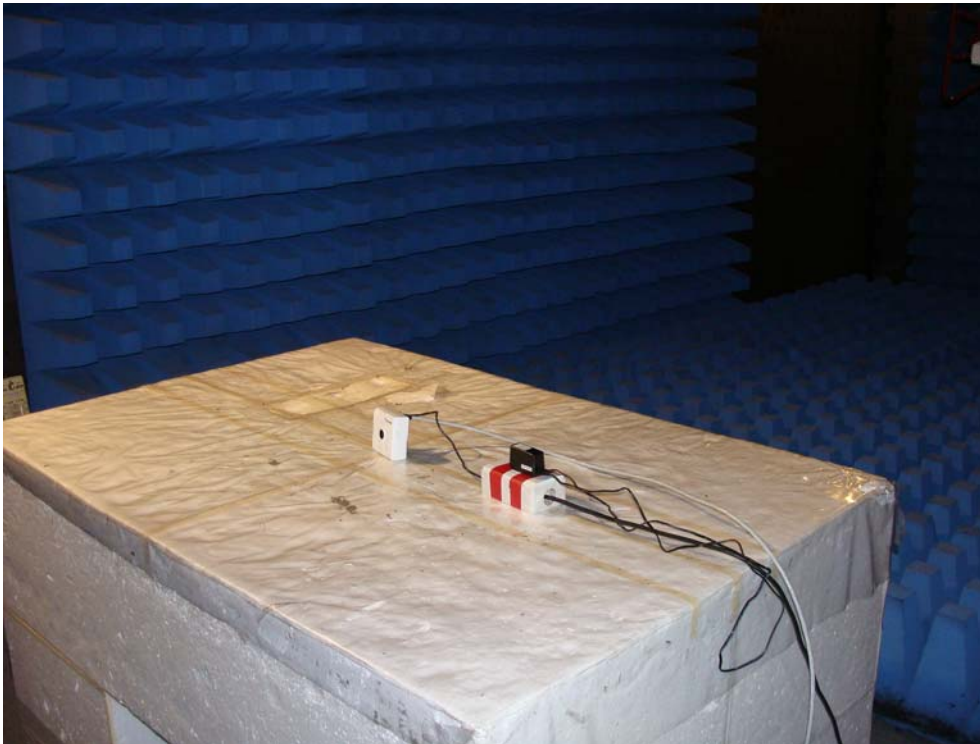


10. Electrical Fast Transient/Burst

10.1. Test Specification

According to Standard : IEC 61000-4-4

10.2. Test Setup

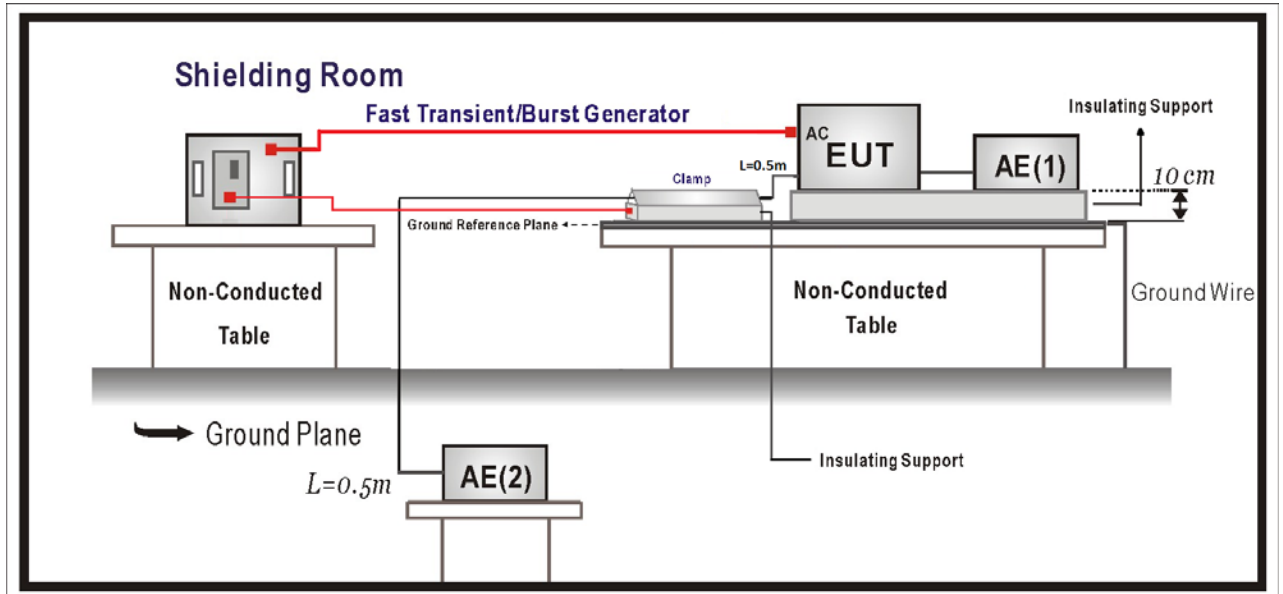

10.3. Limit

Item	Environmental Phenomena	Units	Test Specification	Performance Criteria
I/O and communication ports				
	Fast Transients Common Mode	kV (Peak) Tr/Th ns Rep. Frequency kHz	± 0.5 5/50 5	B
Input DC Power Ports				
	Fast Transients Common Mode	kV (Peak) Tr/Th ns Rep. Frequency kHz	± 0.5 5/50 5	B
Input AC Power Ports				
	Fast Transients Common Mode	kV (Peak) Tr/Th ns Rep. Frequency kHz	± 1 5/50 5	B

10.4. Test Procedure

The EUT is placed on a table that is 0.8 meter height. A ground reference plane is placed on the table, and uses a 0.1m insulation between the EUT and ground reference plane.

The minimum area of the ground reference plane is 1m*1m, and 0.65mm thick min, and projected beyond the EUT by at least 0.1m on all sides.

Test on I/O and communication ports:

The EFT interference signal is through a coupling clamp device couples to the signal and control lines of the EUT with burst noise for 1 minute.

Test on power supply ports:

The EUT is connected to the power mains through a coupling device that directly couples the EFT/B interference signal.

Each of the Line and Neutral conductors is impressed with burst noise for 1 minute.

The length of the signal and power lines between the coupling device and the EUT is 0.5m.

10.5. Deviation from Test Standard

No deviation.

10.6. Test Result

Product	Network Camera		
Test Item	Electrical fast transient/burst		
Test Mode	Mode 1		
Date of Test	2011/02/17	Test Site	No.3 Shielded Room

Inject Line	Polarity	Voltage kV	Inject Time (Second)	Inject Method	Required Criteria	Complied to Criteria	Result
L-N	±	1kV	60	Direct	B	A	PASS
LAN	±	0.5 kV	60	Clamp	B	A	PASS

Note:

The testing performed is from lowest level up to the highest level as required by standard, but only highest level is shown on the report.

- Meet criteria A : Operate as intended during and after the test
- Meet criteria B : Operate as intended after the test
- Meet criteria C : Loss/Error of function
- Additional Information
 - EUT stopped operation and could / could not be reset by operator at _____ kV of Line _____.
- No false alarms or other malfunctions were observed during or after the test.

Product	Network Camera		
Test Item	Electrical fast transient/burst		
Test Mode	Mode 2		
Date of Test	2011/02/17	Test Site	No.3 Shielded Room

Inject Line	Polarity	Voltage kV	Inject Time (Second)	Inject Method	Required Criteria	Complied to Criteria	Result
L-N	±	1kV	60	Direct	B	A	PASS
LAN	±	0.5 kV	60	Clamp	B	A	PASS

Note:

The testing performed is from lowest level up to the highest level as required by standard, but only highest level is shown on the report.

- Meet criteria A : Operate as intended during and after the test
- Meet criteria B : Operate as intended after the test
- Meet criteria C : Loss/Error of function
- Additional Information
 - EUT stopped operation and could / could not be reset by operator at _____ kV of Line _____.
- No false alarms or other malfunctions were observed during or after the test.

10.7. Test Photograph

Test Mode : Mode 1

Description : EFT/B Test Setup



Test Mode : Mode 1

Description : EFT/B Test Setup - Clamp



Test Mode : Mode 2

Description : EFT/B Test Setup



Test Mode : Mode 2

Description : EFT/B Test Setup - Clamp




11. Surge

11.1. Test Specification

According to Standard : IEC 61000-4-5

11.2. Test Setup

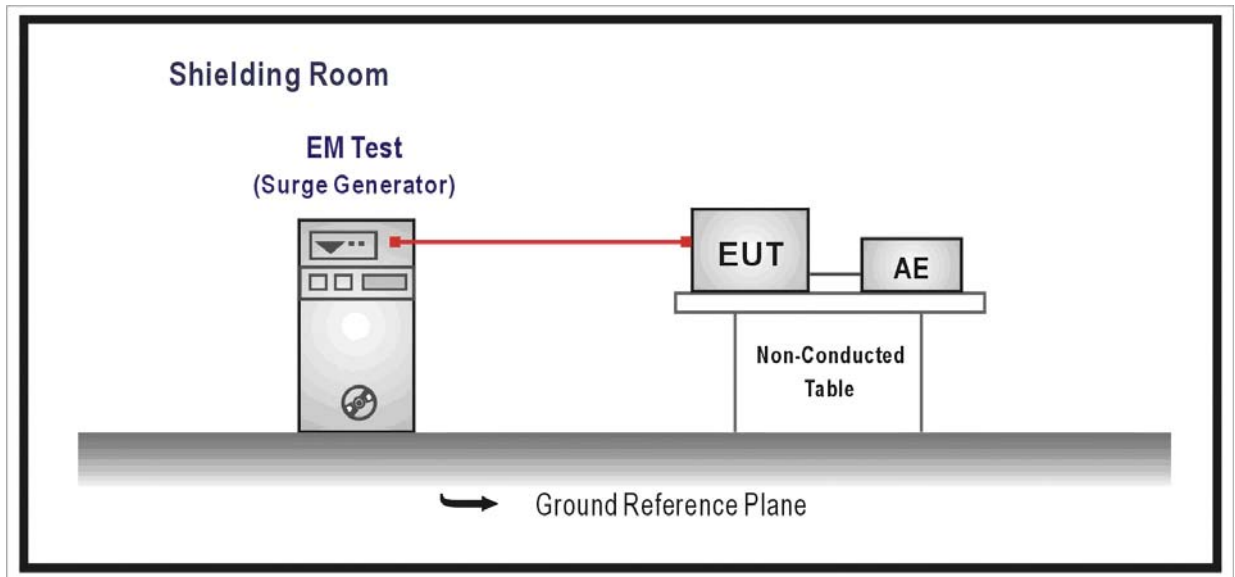

11.3. Limit

Item	Environmental Phenomena	Units	Test Specification	Performance Criteria
Signal Ports and Telecommunication Ports(See 1) and 2))				
	Surges Line to Ground	Tr/Th us kV	1.2/50 (8/20) ± 1	B
Input DC Power Ports				
	Surges Line to Ground	Tr/Th us kV	1.2/50 (8/20) ± 0.5	B
AC Input and AC Output Power Ports				
	Surges Line to Line Line to Ground	Tr/Th us kV kV	1.2/50 (8/20) ± 1 ± 2	B

Notes:

- 1) Applicable only to ports which according to the manufacturer’s may directly to outdoor cables.
- 2) Where normal functioning cannot be achieved because of the impact of the CDN on the EUT, no immunity test shall be required.

11.4. Test Procedure

The EUT and its load are placed on a table that is 0.8 meter above a metal ground plane measured 1m*1m min. and 0.65mm thick min. And projected beyond the EUT by at least 0.1m on all sides. The length of power cord between the coupling device and the EUT shall be 2m or less.

For Input and Output AC Power or DC Input and DC Output Power Ports:

The EUT is connected to the power mains through a coupling device that directly couples the Surge interference signal.

The surge noise shall be applied synchronized to the voltage phase at 0⁰, 90⁰, 180⁰, 270⁰ and the peak value of the a.c. voltage wave. (Positive and negative)

Each of Line-Earth and Line-Line is impressed with a sequence of five surge voltages with interval of 1 min.

11.5. Deviation from Test Standard

No deviation.

11.6. Test Result

Product	Network Camera		
Test Item	Surge		
Test Mode	Mode 1		
Date of Test	2011/02/17	Test Site	No.3 Shielded Room

Inject Line	Polarity	Angle	Voltage kV	Time Interval (Second)	Inject Method	Required Criteria	Complied to Criteria	Result
L-N	±	0	1kV	60	Direct	B	A	PASS
L-N	±	90	1kV	60	Direct	B	A	PASS
L-N	±	180	1kV	60	Direct	B	A	PASS
L-N	±	270	1kV	60	Direct	B	A	PASS

Note:

The testing performed is from lowest level up to the highest level as required by standard, but only highest level is shown on the report.

- Meet criteria A : Operate as intended during and after the test
- Meet criteria B : Operate as intended after the test
- Meet criteria C : Loss/Error of function
- Additional Information
 - EUT stopped operation and could / could not be reset by operator at _____ kV of Line _____.
- No false alarms or other malfunctions were observed during or after the test.

Product	Network Camera		
Test Item	Surge		
Test Mode	Mode 2		
Date of Test	2011/02/17	Test Site	No.3 Shielded Room

Inject Line	Polarity	Angle	Voltage kV	Time Interval (Second)	Inject Method	Required Criteria	Complied to Criteria	Result
L-N	±	0	1kV	60	Direct	B	A	PASS
L-N	±	90	1kV	60	Direct	B	A	PASS
L-N	±	180	1kV	60	Direct	B	A	PASS
L-N	±	270	1kV	60	Direct	B	A	PASS

Note:

The testing performed is from lowest level up to the highest level as required by standard, but only highest level is shown on the report.

- Meet criteria A : Operate as intended during and after the test
- Meet criteria B : Operate as intended after the test
- Meet criteria C : Loss/Error of function
- Additional Information
 - EUT stopped operation and could / could not be reset by operator at _____ kV of Line _____.
- No false alarms or other malfunctions were observed during or after the test.

11.7. Test Photograph

Test Mode : Mode 1

Description : SURGE Test Setup



Test Mode : Mode 2

Description : SURGE Test Setup




12. Conducted Susceptibility

12.1. Test Specification


According to Standard : IEC 61000-4-6

12.2. Test Setup

CDN Test Mode

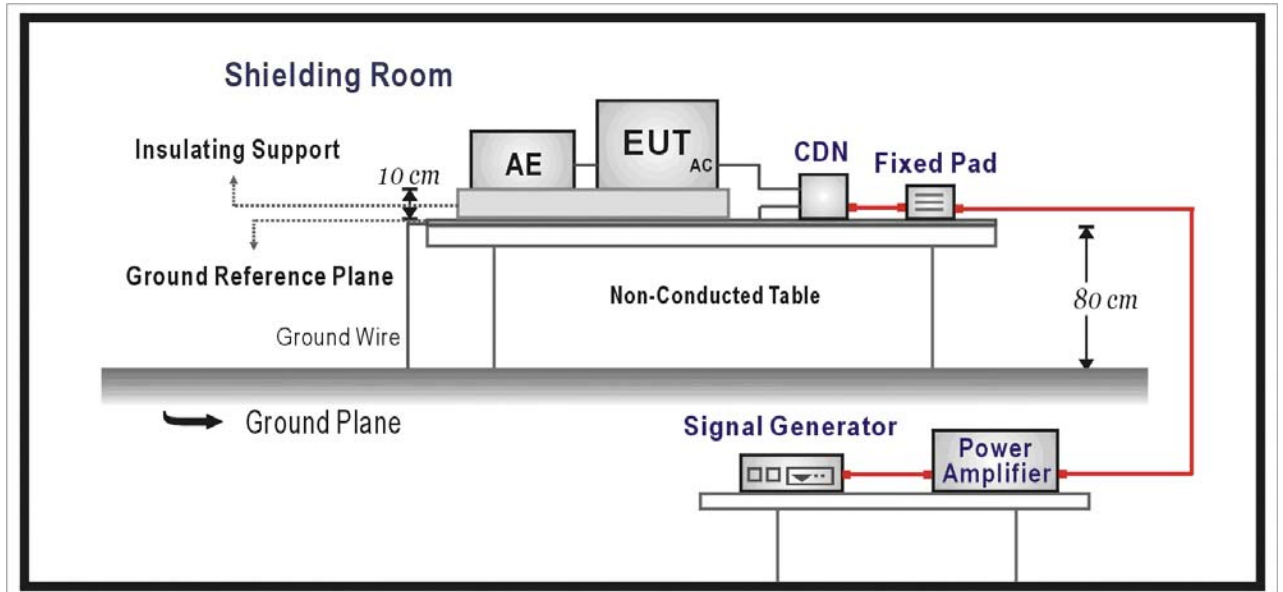

EM Clamp Test Mode

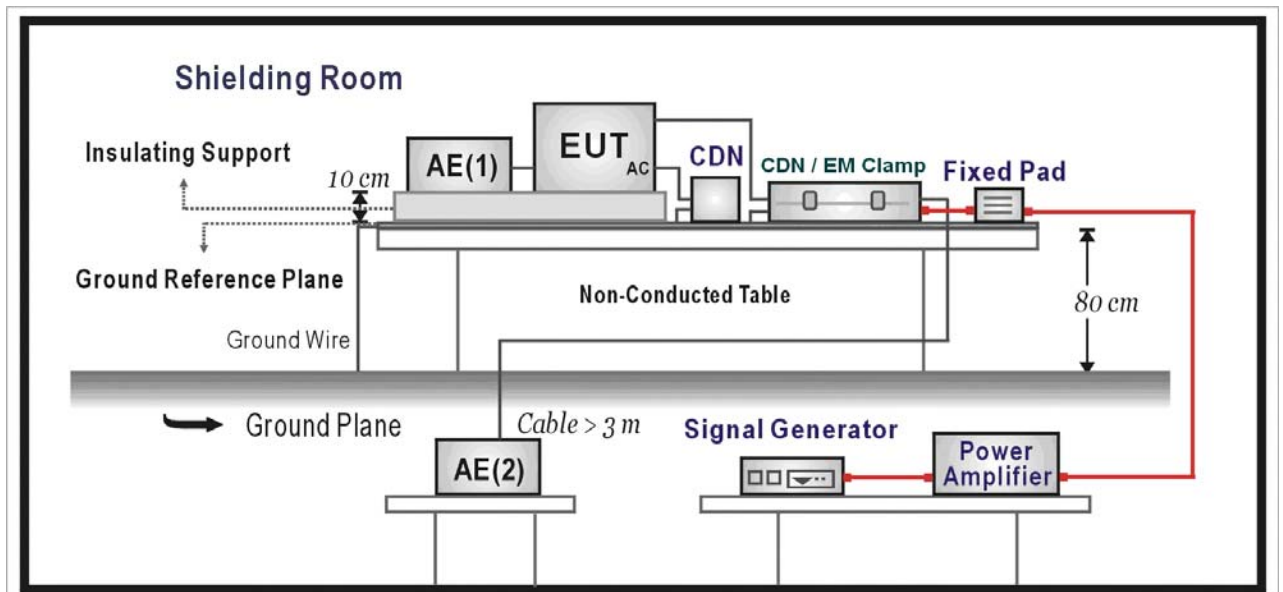

12.3. Limit

Item	Environmental Phenomena	Units	Test Specification	Performance Criteria
Signal Ports and Telecommunication Ports				
	Radio-Frequency Continuous Conducted	MHz V (rms, Un-modulated) % AM (1kHz)	0.15-80 3 80	A
Input DC Power Ports				
	Radio-Frequency Continuous Conducted	MHz V (rms, Un-modulated) % AM (1kHz)	0.15-80 3 80	A
Input AC Power Ports				
	Radio-Frequency Continuous Conducted	MHz V (rms, Un-modulated) % AM (1kHz)	0.15-80 3 80	A

12.4. Test Procedure

The EUT are placed on a table that is 0.8 meter height, and a Ground reference plane on the table, EUT are placed upon table and use a 10cm insulation between the EUT and Ground reference plane.

For Signal Ports and Telecommunication Ports

The disturbance signal is through a coupling and decoupling networks (CDN) or EM-clamp device couples to the signal and Telecommunication lines of the EUT.

For Input DC and AC Power Ports

The EUT is connected to the power mains through a coupling and decoupling networks for power supply lines. And directly couples the disturbances signal into EUT.

Used CDN-M2 for two wires or CDN-M3 for three wires.

All the scanning conditions are as follows:

Condition of Test	Remarks
1. Field Strength	130dBuV(3V) Level 2
2. Radiated Signal	AM 80% Modulated with 1kHz
3. Scanning Frequency	0.15MHz – 80MHz
4. Dwell Time	3 Seconds
5. Frequency step size Δf :	1%
6. The rate of Swept of Frequency	1.5×10^{-3} decades/s

12.5. Deviation from Test Standard

No deviation.

12.6. Test Result

Product	Network Camera		
Test Item	Conducted susceptibility		
Test Mode	Mode 1		
Date of Test	2011/02/17	Test Site	No.6 Shielded Room

Frequency Range (MHz)	Voltage Applied dBuV(V)	Inject Method	Tested Port of EUT	Required Criteria	Performance Criteria Complied To	Result
0.15~80	130 (3V)	CDN	AC IN	A	A	PASS
0.15~80	130 (3V)	CDN	LAN	A	A	PASS

Note:

The testing performed is from lowest level up to the highest level as required by standard, but only highest level is shown on the report.

- Meet criteria A : Operate as intended during and after the test
- Meet criteria B : Operate as intended after the test
- Meet criteria C : Loss/Error of function
- Additional Information
 - EUT stopped operation and could / could not be reset by operator at _____ dBuV(V) at frequency _____MHz.
 - No false alarms or other malfunctions were observed during or after the test. The acceptance criteria were met, and the EUT passed the test.

Product	Network Camera		
Test Item	Conducted susceptibility		
Test Mode	Mode 2		
Date of Test	2011/02/17	Test Site	No.6 Shielded Room

Frequency Range (MHz)	Voltage Applied dBuV(V)	Inject Method	Tested Port of EUT	Required Criteria	Performance Criteria Complied To	Result
0.15~80	130 (3V)	CDN	AC IN	A	A	PASS
0.15~80	130 (3V)	CDN	LAN	A	A	PASS

Note:

The testing performed is from lowest level up to the highest level as required by standard, but only highest level is shown on the report.

- Meet criteria A : Operate as intended during and after the test
- Meet criteria B : Operate as intended after the test
- Meet criteria C : Loss/Error of function
- Additional Information
 - EUT stopped operation and could / could not be reset by operator at _____ dBuV(V) at frequency _____MHz.
 - No false alarms or other malfunctions were observed during or after the test. The acceptance criteria were met, and the EUT passed the test.

12.7. Test Photograph

Test Mode : Mode 1

Description : Conducted Susceptibility Test Setup



Test Mode : Mode 1

Description : Conducted Susceptibility Test Setup - CDN



Test Mode : Mode 2

Description : Conducted Susceptibility Test Setup



Test Mode : Mode 2

Description : Conducted Susceptibility Test Setup - CDN




13. Power Frequency Magnetic Field

13.1. Test Specification

According to Standard : IEC 61000-4-8

13.2. Test Setup

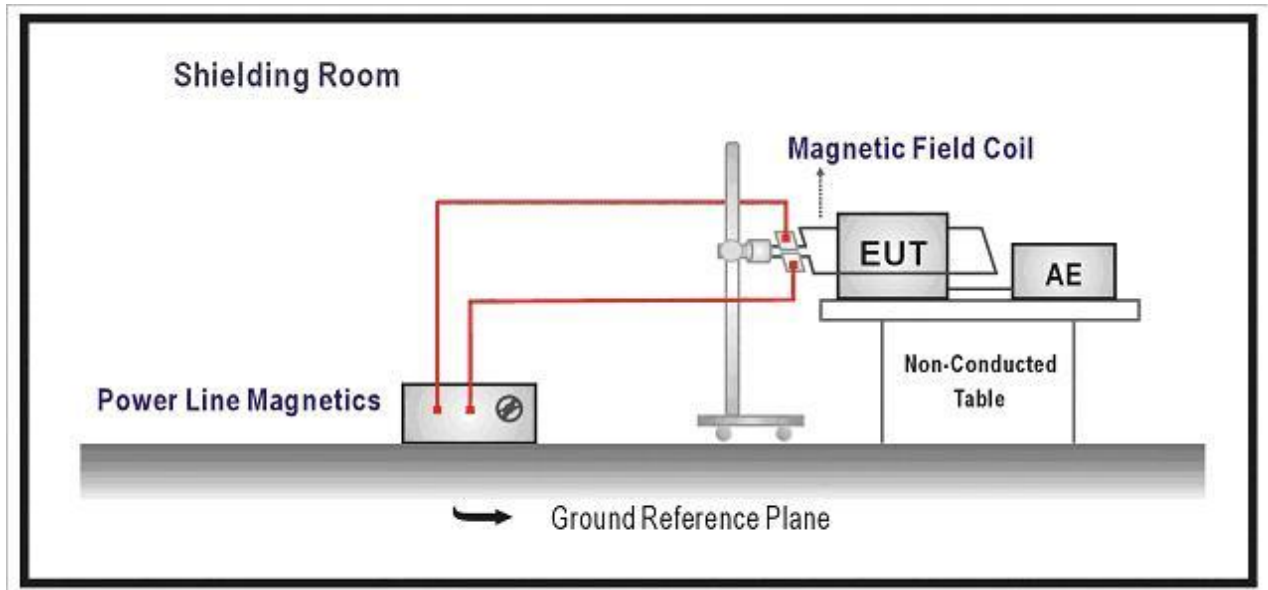

13.3. Limit

Item	Environmental Phenomena	Units	Test Specification	Performance Criteria
Enclosure Port				
	Power-Frequency Magnetic Field	Hz A/m (r.m.s.)	50 1	A

13.4. Test Procedure

The EUT and its load are placed on a table which is 0.8 meter above a metal ground plane measured at least 1m*1m min. The test magnetic field shall be placed at central of the induction coil.

The test magnetic Field shall be applied 10 minutes by the immersion method to the EUT. And the induction coil shall be rotated by 90° in order to expose the EUT to the test field with different orientation (X, Y, Z Orientations).

13.5. Deviation from Test Standard

No deviation.

13.6. Test Result

Product	Network Camera		
Test Item	Power frequency magnetic field		
Test Mode	Mode 1		
Date of Test	2011/02/17	Test Site	No.3 Shielded Room

Polarization	Frequency (Hz)	Magnetic Strength (A/m)	Required Performance Criteria	Performance Criteria Complied To	Test Result
X Orientation	50	1	A	A	PASS
Y Orientation	50	1	A	A	PASS
Z Orientation	50	1	A	A	PASS

- Meet criteria A: Operate as intended during and after the test
- Meet criteria B: Operate as intended after the test
- Meet criteria C: Loss/Error of function
- Additional Information
 - EUT stopped operation and could / could not be reset by operator at _____ kV of Line _____.
- No false alarms or other malfunctions were observed during or after the test. The acceptance criteria were met, and the EUT passed the test.

Product	Network Camera		
Test Item	Power frequency magnetic field		
Test Mode	Mode 2		
Date of Test	2011/02/17	Test Site	No.3 Shielded Room

Polarization	Frequency (Hz)	Magnetic Strength (A/m)	Required Performance Criteria	Performance Criteria Complied To	Test Result
X Orientation	50	1	A	A	PASS
Y Orientation	50	1	A	A	PASS
Z Orientation	50	1	A	A	PASS

- Meet criteria A: Operate as intended during and after the test
- Meet criteria B: Operate as intended after the test
- Meet criteria C: Loss/Error of function
- Additional Information
 - EUT stopped operation and could / could not be reset by operator at _____ kV of Line _____.
- No false alarms or other malfunctions were observed during or after the test. The acceptance criteria were met, and the EUT passed the test.

13.7. Test Photograph


Test Mode : Mode 1

Description : Power Frequency Magnetic Field Test Setup



Test Mode : Mode 2

Description : Power Frequency Magnetic Field Test Setup

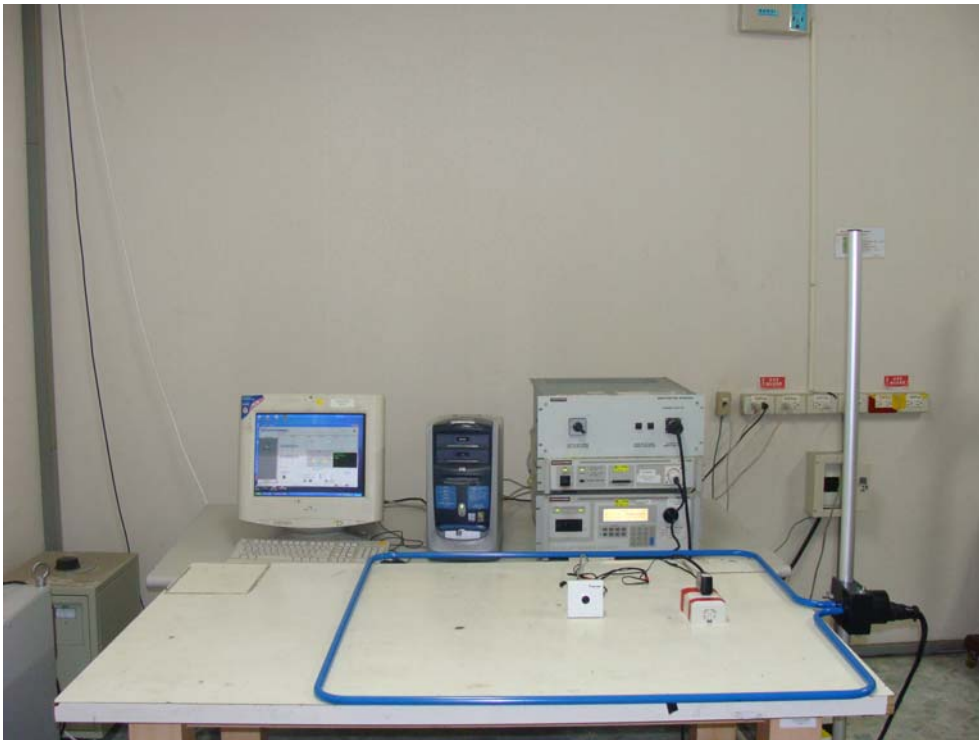


14. Voltage Dips and Interruption

14.1. Test Specification

According to Standard : IEC 61000-4-11

14.2. Test Setup

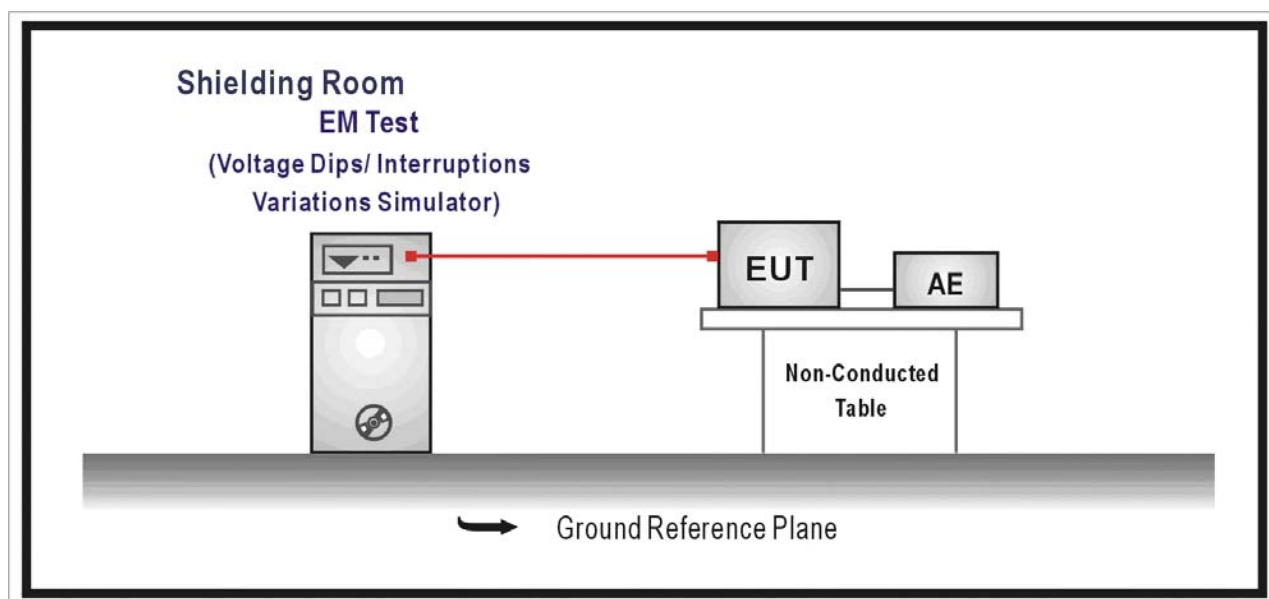

14.3. Limit

Item	Environmental Phenomena	Units	Test Specification	Performance Criteria
Input AC Power Ports				
Voltage Dips	% Reduction	30	C	
	Period	25		
Voltage Interruptions	% Reduction	>95	B	
	Period	0.5		
Voltage Interruptions	% Reduction	> 95	C	
	Period	250		

14.4. Test Procedure

The EUT and its load are placed on a table which is 0.8 meter above a metal ground plane measured 1m*1m min. And 0.65mm thick min. And projected beyond the EUT by at least 0.1m on all sides. The power cord shall be used the shortest power cord as specified by the manufacturer.

For Voltage Dips/ Interruptions test:

The selection of test voltage is based on the rated power range. If the operation range is large than 20% of lower power range, both end of specified voltage shall be tested.

Otherwise, the typical voltage specification is selected as test voltage.

The EUT is connected to the power mains through a coupling device that directly couples to the Voltage Dips and Interruption Generator.

The EUT shall be tested for 30% voltage dip of supplied voltage and duration 25 Periods, for 95% voltage dip of supplied voltage and duration 0.5 Periods with a sequence of three voltage dips with intervals of 10 seconds, and for 95% voltage interruption of supplied voltage and duration 250 Periods with a sequence of three voltage interruptions with intervals of 10 seconds.

Voltage phase shifting are shall occur at 0° , 45° , 90° , 135° , 180° , 225° , 270° , 315° of the voltage.

14.5. Deviation from Test Standard

No deviation.

14.6. Test Result

Product	Network Camera		
Test Item	Voltage dips and interruption		
Test Mode	Mode 1		
Date of Test	2011/02/17	Test Site	No.3 Shielded Room

Voltage Dips and Interruption Reduction(%)	Angle	Test Duration (Periods)	Required Performance Criteria	Performance Criteria Complied To	Test Result
30	0	25	C	A	PASS
30	45	25	C	A	PASS
30	90	25	C	A	PASS
30	135	25	C	A	PASS
30	180	25	C	A	PASS
30	225	25	C	A	PASS
30	270	25	C	A	PASS
30	315	25	C	A	PASS
>95	0	0.5	B	A	PASS
>95	45	0.5	B	A	PASS
>95	90	0.5	B	A	PASS
>95	135	0.5	B	A	PASS
>95	180	0.5	B	A	PASS
>95	225	0.5	B	A	PASS
>95	270	0.5	B	A	PASS
>95	315	0.5	B	A	PASS
>95	0	250	C	B	PASS
>95	45	250	C	B	PASS
>95	90	250	C	B	PASS
>95	135	250	C	B	PASS
>95	180	250	C	B	PASS
>95	225	250	C	B	PASS
>95	270	250	C	B	PASS
>95	315	250	C	B	PASS

- Meet criteria A: Operate as intended during and after the test
- Meet criteria B: Operate as intended after the test
- Meet criteria C: Loss/Error of function
- Additional Information
 - The nominal voltage of EUT is 230V.
 - EUT stopped operation and could / could not be reset by operator at _____ kV of Line _____.
- No false alarms or other malfunctions were observed during or after the test. The acceptance criteria were met, and the EUT passed the test.

Product	Network Camera		
Test Item	Voltage dips and interruption		
Test Mode	Mode 2		
Date of Test	2011/02/17	Test Site	No.3 Shielded Room

Voltage Dips and Interruption Reduction(%)	Angle	Test Duration (Periods)	Required Performance Criteria	Performance Criteria Complied To	Test Result
30	0	25	C	A	PASS
30	45	25	C	A	PASS
30	90	25	C	A	PASS
30	135	25	C	A	PASS
30	180	25	C	A	PASS
30	225	25	C	A	PASS
30	270	25	C	A	PASS
30	315	25	C	A	PASS
>95	0	0.5	B	A	PASS
>95	45	0.5	B	A	PASS
>95	90	0.5	B	A	PASS
>95	135	0.5	B	A	PASS
>95	180	0.5	B	A	PASS
>95	225	0.5	B	A	PASS
>95	270	0.5	B	A	PASS
>95	315	0.5	B	A	PASS
>95	0	250	C	B	PASS
>95	45	250	C	B	PASS
>95	90	250	C	B	PASS
>95	135	250	C	B	PASS
>95	180	250	C	B	PASS
>95	225	250	C	B	PASS
>95	270	250	C	B	PASS
>95	315	250	C	B	PASS

- Meet criteria A: Operate as intended during and after the test
- Meet criteria B: Operate as intended after the test
- Meet criteria C: Loss/Error of function
- Additional Information
 - The nominal voltage of EUT is 230V.
 - EUT stopped operation and could / could not be reset by operator at _____ kV of Line _____.
- No false alarms or other malfunctions were observed during or after the test. The acceptance criteria were met, and the EUT passed the test.

14.7. Test Photograph

Test Mode : Mode 1

Description : Voltage Dips Test Setup



Test Mode : Mode 2

Description : Voltage Dips Test Setup



15. Attachment

➤ EUT Photograph

(1) EUT Photo



(2) EUT Photo



(3) EUT Photo



(4) EUT Photo



(5) EUT Photo



(6) EUT Photo



(7) EUT Photo



(8) EUT Photo



(9) EUT Photo

