



CERTIFICATE

Issued Date: Feb. 23, 2011
Report No. : 112142R-ITCEP11V04

This is to certify that the following designated product

Product : Network Camera
Trade name : VIVOTEK
Model Number : IP8162, IP8162P
Company Name : VIVOTEK INC.

This product, which has been issued the test report listed as above in QuieTek Laboratory, is based on a single evaluation of one sample and confirmed to comply with the requirements of the following EMC standard.

EN 55022: 2006+A1: 2007	EN 55024: 1998+A1: 2001+A2: 2003
EN 61000-3-2: 2006+A2: 2009	IEC 61000-4-2: 2008
EN 61000-3-3: 2008	IEC 61000-4-3: 2008
AS/NZS CISPR 22: 2009	IEC 61000-4-4: 2004
	IEC 61000-4-5: 2005
	IEC 61000-4-6: 2008
	IEC 61000-4-8: 2009
	IEC 61000-4-11: 2004

TEST LABORATORY

Vincent Lin / Manager



Test Report

Product Name : Network Camera

Model No. : IP8162, IP8162P

Applicant : VIVOTEK INC.

Address : 6F, No.192, Lien-Cheng Rd., Chung-Ho , New Taipei City,
235, Taiwan, R.O.C.

Date of Receipt : 2011/02/11

Issued Date : 2011/02/23

Report No. : 112142R-ITCEP11V04

Report Version : V1.0

The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF, NVLAP or any agency of the Government.

The test report shall not be reproduced except in full without the written approval of QuieTek Corporation.



Declaration of Conformity

We herewith confirm the following designated products to comply with the requirements set out in the Council Directive on the approximation of the laws of the Member States relating to Electromagnetic Compatibility Directive (2004/108/EC) with applicable standards listed below.

Product : Network Camera
Trade name : VIVOTEK
Model Number : IP8162, IP8162P
Applicable Harmonized : EN 55022: 2006+A1: 2007, Class B
Standards under Directive EN 55024: 1998+A1: 2001+A2: 2003
2004/108/EC EN 61000-3-2: 2006+A2: 2009, Class A
EN 61000-3-3: 2008

Company Name : _____
Company Address : _____
Telephone : _____ Facsimile : _____

Person in responsible for marking this declaration:

_____ Name (Full Name)	_____ Title/ Department
_____ Date	_____ Legal Signature



Statement of Conformity

This statement is to certify that the designated product below.

Product : Network Camera
Trade name : VIVOTEK
Model Number : IP8162, IP8162P
Company Name : VIVOTEK INC.
Applicable Standards : EN 55022: 2006+A1: 2007, Class B
EN 55024: 1998+A1: 2001+A2: 2003
EN 61000-3-2: 2006+A2: 2009, Class A
EN 61000-3-3: 2008

One sample of the designated product has been tested and evaluated in our laboratory to find in compliance with the applicable standards above. The issued test report(s) show(s) it in detail.

Report Number : 112142R-ITCEP11V04



The verification is based on a single evaluation of one sample of above-mentioned products. It does not imply an assessment of the whole production and does not permit the use of the test lab. Logo.

Test Report Certification

Issued Date : 2011/02/23
 Report No. : 112142R-ITCEP11V04



Product Name : Network Camera
 Applicant : VIVOTEK INC.
 Address : 6F, No.192, Lien-Cheng Rd., Chung-Ho , New Taipei City,
 235, Taiwan, R.O.C.
 Manufacturer : VIVOTEK INC.
 Model No. : IP8162, IP8162P
 EUT Rated Voltage : AC 100-240V, 50-60Hz, AC 24V, By POE
 EUT Test Voltage : AC 230 V / 50 Hz, AC 24V, By POE
 Trade Name : VIVOTEK
 Applicable Standard : EN 55022: 2006+A1: 2007, Class B
 EN 55024: 1998+A1: 2001+A2: 2003
 EN 61000-3-2:2006+A2: 2009
 EN 61000-3-3:2008
 AS/NZS CISPR 22: 2009
 Test Result : Complied
 Performed Location : Quietek Corporation (Linkou Laboratory)
 No. 5-22, Rueishu Keng, Linkou Dist., New Taipei City
 24451, Taiwan. R.O.C.
 TEL:+866-2-8601-3788 / FAX:+886-2-8601-3789

Documented By : Leven Huang
 (Senior Adm. Specialist / Leven Huang)

Reviewed By : kevin ker
 (Engineer / Kevin Ker)

Approved By : [Signature]
 (Manager / Vincent Lin)

Laboratory Information

We , **Quietek Corporation**, are an independent EMC and safety consultancy that was established the whole facility in our laboratories. The test facility has been accredited/accepted (audited or listed) by the following related bodies in compliance with ISO 17025, EN 45001 and specified testing scopes:

Taiwan R.O.C.	:	BSMI, NCC, TAF
Germany	:	TUV Rheinland
Norway	:	Nemko, DNV
USA	:	FCC, NVLAP
Japan	:	VCCI

The related certificate for our laboratories about the test site and management system can be downloaded from Quietek Corporation's Web Site : <http://www.quietek.com/tw/ctg/cts/accreditations.htm>

The address and introduction of Quietek Corporation's laboratories can be founded in our Web site : <http://www.quietek.com/>

If you have any comments, Please don't hesitate to contact us. Our contact information is as below:

HsinChu Testing Laboratory :

No.75-2, 3rd Lin, Wangye Keng, Yonghxing Tsuen, Qionglin Shiang, Hsinchu County 307, Taiwan, R.O.C.
 TEL:+886-3-592-8858 / FAX:+886-3-592-8859 E-Mail : service@quietek.com



Linkou Testing Laboratory :

No. 5-22, Rueishu Keng, Linkou Dist., New Taipei City 24451, Taiwan. R.O.C.
 TEL : 886-2-8601-3788 / FAX : 886-2-8601-3789 E-Mail : service@quietek.com



Suzhou (China) Testing Laboratory :

No. 99 Hongye Rd., Suzhou Industrial Park Loufeng Hi-Tech Development Zone., Suzhou,China.
 TEL : +86-512-6251-5088 / FAX : +86-512-6251-5098 E-Mail : service@quietek.com



TABLE OF CONTENTS

Description	Page
1. General Information	7
1.1. EUT Description.....	7
1.2. Mode of Operation	8
1.3. Tested System Details	9
1.4. Configuration of Tested System	10
1.5. EUT Exercise Software.....	12
2. Technical Test	13
2.1. Summary of Test Result.....	13
2.2. List of Test Equipment	14
2.3. Measurement Uncertainty.....	17
2.4. Test Environment.....	19
3. Conducted Emission (Main Terminals).....	20
3.1. Test Specification	20
3.2. Test Setup.....	20
3.3. Limit	20
3.4. Test Procedure	21
3.5. Deviation from Test Standard.....	21
3.6. Test Result	22
3.7. Test Photograph	34
4. Conducted Emissions (Telecommunication Ports).....	36
4.1. Test Specification	36
4.2. Test Setup.....	36
4.3. Limit	36
4.4. Test Procedure	37
4.5. Deviation from Test Standard.....	37
4.6. Test Result	38
4.7. Test Photograph	56
5. Radiated Emission	59
5.1. Test Specification	59
5.2. Test Setup.....	59
5.3. Limit	60
5.4. Test Procedure	61
5.5. Deviation from Test Standard.....	61
5.6. Test Result	62
5.7. Test Photograph	74
6. Harmonic Current Emission	79

6.1.	Test Specification	79
6.2.	Test Setup.....	79
6.3.	Limit.....	79
6.4.	Test Procedure	81
6.5.	Deviation from Test Standard.....	81
6.6.	Test Result	82
6.7.	Test Photograph	84
7.	Voltage Fluctuation and Flicker	85
7.1.	Test Specification	85
7.2.	Test Setup.....	85
7.3.	Limit.....	85
7.4.	Test Procedure	86
7.5.	Deviation from Test Standard.....	86
7.6.	Test Result	87
7.7.	Test Photograph	88
8.	Electrostatic Discharge	89
8.1.	Test Specification	89
8.2.	Test Setup.....	89
8.3.	Limit.....	89
8.4.	Test Procedure	90
8.5.	Deviation from Test Standard.....	90
8.6.	Test Result	91
8.7.	Test Photograph	94
9.	Radiated Susceptibility	96
9.1.	Test Specification	96
9.2.	Test Setup.....	96
9.3.	Limit.....	96
9.4.	Test Procedure	97
9.5.	Deviation from Test Standard.....	97
9.6.	Test Result	98
9.7.	Test Photograph	101
10.	Electrical Fast Transient/Burst	103
10.1.	Test Specification	103
10.2.	Test Setup.....	103
10.3.	Limit.....	103
10.4.	Test Procedure	104
10.5.	Deviation from Test Standard.....	104
10.6.	Test Result	105

10.7.	Test Photograph	108
11.	Surge	111
11.1.	Test Specification	111
11.2.	Test Setup.....	111
11.3.	Limit.....	111
11.4.	Test Procedure	112
11.5.	Deviation from Test Standard.....	112
11.6.	Test Result.....	113
11.7.	Test Photograph	115
12.	Conducted Susceptibility	116
12.1.	Test Specification	116
12.2.	Test Setup.....	116
12.3.	Limit.....	117
12.4.	Test Procedure	117
12.5.	Deviation from Test Standard.....	117
12.6.	Test Result.....	118
12.7.	Test Photograph	121
13.	Power Frequency Magnetic Field	124
13.1.	Test Specification	124
13.2.	Test Setup.....	124
13.3.	Limit.....	124
13.4.	Test Procedure	124
13.5.	Deviation from Test Standard.....	124
13.6.	Test Result.....	125
13.7.	Test Photograph	128
14.	Voltage Dips and Interruption.....	130
14.1.	Test Specification	130
14.2.	Test Setup.....	130
14.3.	Limit.....	130
14.4.	Test Procedure	131
14.5.	Deviation from Test Standard.....	131
14.6.	Test Result.....	132
14.7.	Test Photograph	133
15.	Attachment	134
	EUT Photograph.....	134

1. General Information

1.1. EUT Description

Product Name	Network Camera
Trade Name	VIVOTEK
Model No.	IP8162, IP8162P

Component	
Power Adapter	MFR: ENG, M/N: 3A-183WP12 Input: AC 100-240V, 50-60Hz, 0.6A Output: DC 12V, 1.5A Cable Out: Non-Shielded, 1.8m

Note: The different of the each model is shown as below:

Model Number	Description
IP8162	DC IRIS
IP8162P	P IRIS
Note: DC IRIS and P IRIS are LENS is dissimilar	

1.2. Mode of Operation

Quietek has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Pre-Test Mode	
Mode 1: Adapter Mode Mode 2: AC 24V Mode Mode 3: POE Mode	
Final Test Mode	
Emission	Mode 1: Adapter Mode Mode 2: AC 24V Mode Mode 3: POE Mode
Immunity	Mode 1: Adapter Mode Mode 2: AC 24V Mode Mode 3: POE Mode

1.3. Tested System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) ssare:

Test Mode		Mode 1: Adapter Mode Mode 2: AC 24V Mode			
Product		Manufacturer	Model No.	Serial No.	Power Cord
1	Monitor (EMI)	SONY	PVM-14M2U	2105742	Non-Shielded, 1.8m
	Monitor (EMS)	SONY	LMPV1410	N/A	Non-Shielded, 1.8m
2	Notebook PC	DELL	D630	00144-023-351-283	Non-Shielded, 1.8m
3	Microphone & Earphone	Ergotech	ET-E201	N/A	N/A


Test Mode		Mode 3: POE Mode			
Product		Manufacturer	Model No.	Serial No.	Power Cord
1	Monitor (EMI)	SONY	PVM-14M2U	2105742	Non-Shielded, 1.8m
	Monitor (EMS)	SONY	LMPV1410	N/A	Non-Shielded, 1.8m
2	Notebook PC	DELL	D630	00144-023-351-283	Non-Shielded, 1.8m
3	PoE	LINKSYS	WAPPoE12	N/A	Non-Shielded, 1.8m
4	Microphone & Earphone	Ergotech	ET-E201	N/A	N/A

1.4. Configuration of Tested System

Test Mode		Mode 1: Adapter Mode Mode 2: AC 24V Mode
Connection Diagram		
<pre> graph TD EUT[EUT] --- A PC[Notebook PC (2)] EUT --- B Mon[Monitor (1)] EUT --- C Mic[Microphone & Earphone (3)] subgraph DashedBox [] Mon EUT Mic end </pre>		
Signal Cable Type		Signal cable Description
A	LAN Cable	Non-Shielded, 6m
B	Coaxial Cable	Shielded, 6m
C	Microphone & Earphone Cable	Non-Shielded, 1.6m

Test Mode	Mode 3: POE Mode
-----------	------------------

Connection Diagram

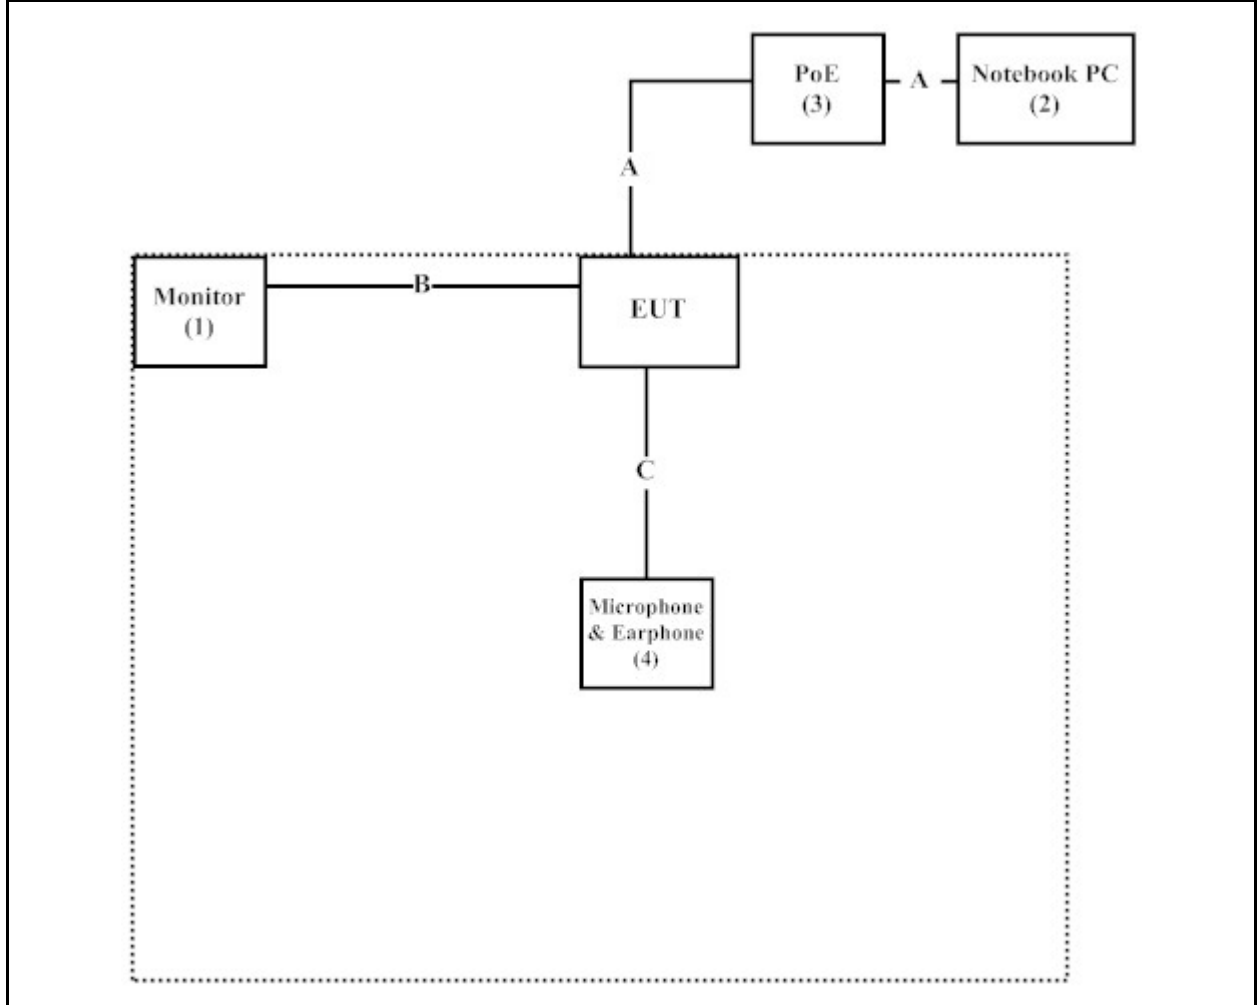

Signal Cable Type		Signal cable Description
A	LAN Cable	Non-Shielded, 6m, two PCS.
B	Coaxial Cable	Shielded, 6m
C	Microphone & Earphone Cable	Non-Shielded, 1.6m

1.5. EUT Exercise Software

1	Setup the EUT and simulators as shown on 1.4.
2	Turn on the power of all equipment.
3	The EUT will start to operate and display the video figure from the signal source.
4	The EUT will display “video figure” on monitor.
5	Repeat the above procedure (3) to (4).

2. Technical Test

2.1. Summary of Test Result

- No deviations from the test standards
 Deviations from the test standards as below description:

Emission			
Performed Item	Normative References	Test Performed	Deviation
Conducted Emission	EN 55022: 2006+A1: 2007 AS/NZS CISPR 22: 2009	Yes	No
Impedance Stabilization Network	EN 55022: 2006+A1: 2007 AS/NZS CISPR 22: 2009	Yes	No
Radiated Emission	EN 55022: 2006+A1: 2007 AS/NZS CISPR 22: 2009	Yes	No
Power Harmonics	EN 61000-3-2:2006+A2: 2009	Yes	No
Voltage Fluctuation and Flicker	EN 61000-3-3:2008	Yes	No

Immunity			
Performed Item	Normative References	Test Performed	Deviation
Electrostatic Discharge	IEC 61000-4-2: 2008	Yes	No
Radiated susceptibility	IEC 61000-4-3: 2008	Yes	No
Electrical fast transient/burst	IEC 61000-4-4: 2004	Yes	No
Surge	IEC 61000-4-5: 2005	Yes	No
Conducted susceptibility	IEC 61000-4-6: 2008	Yes	No
Power frequency magnetic field	IEC 61000-4-8: 2009	Yes	No
Voltage dips and interruption	IEC 61000-4-11: 2004	Yes	No

2.2. List of Test Equipment

Conducted Emission / SR1

Instrument	Manufacturer	Type No.	Serial No	Cal. Date
EMI Test Receiver	R&S	ESCS 30	100366	2010/10/29
LISN	R&S	ENV4200	833209/007	2010/08/14
LISN	R&S	ENV216	100085	2011/02/17
Pulse Limiter	R&S	ESH3-Z2	357.88.10.52	2010/09/10

Impedance Stabilization Network / SR1

Instrument	Manufacturer	Type No.	Serial No	Cal. Date
Capacitive Voltage Probe	Schaffner	CVP2200A	18331	2010/11/16
EMI Test Receiver	R&S	ESCS 30	100366	2010/10/29
LISN	R&S	ENV216	100085	2011/02/17
LISN	R&S	ENV4200	833209/007	2010/08/14
Pulse Limiter	R&S	ESH3-Z2	357.88.10.52	2010/09/10
RF Current Probe	FCC	F-65 10KHz~1GHz	198	2010/11/13
BALANCED TELECOM ISN	FCC	FCC-TLISN-T2-02	20316	2010/11/22
BALANCED TELECOM ISN	FCC	FCC-TLISN-T4-02	20317	2010/11/22
BALANCED TELECOM ISN	FCC	FCC-TLISN-T8-02	20319	2010/11/22

Radiated Emission / Site2

Instrument	Manufacturer	Type No.	Serial No	Cal. Date
Bilog Antenna	Schaffner Chase	CBL6112B	2921	2010/08/02
Broadband Horn Antenna	Schwarzbeck	BBHA9170	209	2010/10/27
EMI Test Receiver	R&S	ESCS 30	100123	2010/05/27
Horn Antenna	Schwarzbeck	BBHA9120D	305	2010/08/26
Pre-Amplifier	QTK	N/A	N/A	2010/08/01
Spectrum Analyzer	Advantest	R3162	01700040	2010/11/18

Radiated Emission / 9x6x6 Chamber

Instrument	Manufacturer	Type No.	Serial No	Cal. Date
Spectrum Analyzer (9K-26.5GHz)	Agilent	E4408B	MY45102743	2010/08/12
Horn Antenna	Schwarzbeck	9120D	576	2010/10/21
Pre-Amplifier	Quietek	AP-180C	CHM/071920	2010/08/01

Power Harmonics / SR3

Instrument	Manufacturer	Type No.	Serial No	Cal. Date
AC Power Source(Harmonic)	Schaffner	NSG 1007	HK54148	2010/09/06
IEC1000-4-X Analyzer(Flicker)	Schaffner	CCN 1000-1	X7 1887	2010/09/06

Voltage Fluctuation and Flicker / SR3

Instrument	Manufacturer	Type No.	Serial No	Cal. Date
AC Power Source(Harmonic)	Schaffner	NSG 1007	HK54148	2010/09/06
IEC1000-4-X Analyzer(Flicker)	Schaffner	CCN 1000-1	X7 1887	2010/09/06

Electrostatic Discharge / SR6

Instrument	Manufacturer	Type No.	Serial No	Cal. Date
ESD Simulator System	Noiseken	TC-815R	ESS0929097	2010/08/30
Horizontal Coupling Plane(HCP)	QuieTek	HCP AL50	N/A	N/A
Vertical Coupling Plane(VCP)	QuieTek	VCP AL50	N/A	N/A

Radiated susceptibility / CB5

Instrument	Manufacturer	Type No.	Serial No	Cal. Date
AF-BOX	R&S	AF-BOX ACCUST	100007	N/A
Audio Analyzer	R&S	UPL 16	100137	2010/04/22
Biconilog Antenna	EMCO	3149	00071675	N/A
Directional Coupler	A&R	DC 6180	22735	N/A
Dual Microphone Supply	B&K	5935	2426784	2010/04/22
Mouth Simulator	B&K	4227	2439692	2010/04/22
Power Amplifier	A&R	30S1G3	309453	N/A
Power Amplifier	A&R	100W10000M7	A285000010	N/A
Power Amplifier	SCHAFFNER	CBA9413B	4020	N/A
Power Amplifier	AR	75A250A	0325371	N/A
Power Meter	R&S	NRVD(P.M)	100219	2010/04/22
Pre-Amplifier	A&R	150A220	23067	N/A
Probe Microphone	B&K	4182	2278070	2010/04/22
Signal Generator	R&S	SML03	103330	2010/04/21

Electrical fast transient/burst / SR3

Instrument	Manufacturer	Type No.	Serial No	Cal. Date
TRANSIENT TEST SYSTEM	EMC PARTNET	TRA2000IN6	1138	2010/12/09

Surge / SR3

Instrument	Manufacturer	Type No.	Serial No	Cal. Date
TRANSIENT TEST SYSTEM	EMC PARTNET	TRA2000IN6	1138	2010/12/09

Conducted susceptibility / SR6

Instrument	Manufacturer	Type No.	Serial No	Cal. Date
Schaffner NSG 2070 RF-Generator	Schaffner	N/A	N/A	2010/04/21

Power frequency magnetic field / SR3

Instrument	Manufacturer	Type No.	Serial No	Cal. Date
Induction Coil Interface	Schaffner	INA 2141	6002	N/A
Magnetic Loop Coil	Schaffner	INA 702	160	N/A
Triaxial ELF Magnetic Field Meter	F.B.BELL	4090	114135	2010/03/27

Voltage dips and interruption / SR3

Instrument	Manufacturer	Type No.	Serial No	Cal. Date
TRANSIENT TEST SYSTEM	EMC PARTNET	TRA2000IN6	1138	2010/12/09

Schaffner NSG 2070 RF-Generator				
Instrument	Manufacturer	Type No.	Serial No	Cal. Date
CDN	Schaffner	CAL U100A	20405	N/A
CDN	Schaffner	TRA U150	20454	N/A
CDN M016S	Schaffner	CAL U100A	20410	N/A
CDN M016S	Schaffner	TRA U150	21167	N/A
CDN T002	Schaffner	CAL U100	20491	N/A
CDN T002	Schaffner	TRA U150	21169	N/A
CDN T400	Schaffner	CAL U100	17735	N/A
CDN T400	Schaffner	TRA U150	21166	N/A
Coupling Decoupling Network	Schaffner	CDN M016S	20823	2010/04/02
Coupling Decoupling Network	Schaffner	CDN T002	19018	2010/04/02
Coupling Decoupling Network	Schaffner	CDN T400	21226	2010/04/02
EM-CLAMP	Schaffner	KEMZ 801	21024	2010/04/02

2.3. Measurement Uncertainty

Conducted Emission

The measurement uncertainty is evaluated as ± 2.26 dB.

Impedance Stabilization Network

The measurement uncertainty is evaluated as ± 2.26 dB.

Radiated Emission

The measurement uncertainty is evaluated as ± 3.19 dB.

Electrostatic Discharge

As what is concluded in the document from Note2 of clause 5.4.6.2 of ISO/IEC 17025: 1999[2], the requirements for measurement uncertainty in ESD testing are deemed to have been satisfied, and the testing is reported in accordance with the relevant ESD standards. The immunity test signal from the ESD system meet the required specifications in IEC 61000-4-2 through the calibration report with the calibrated uncertainty for the waveform of voltage and timing as being 1.0 % and 0.1%.

Radiated susceptibility

As what is concluded in the document from Note2 of clause 5.4.6.2 of ISO/IEC 17025: 1999[2], the requirements for measurement uncertainty in RS testing are deemed to have been satisfied, and the testing is reported in accordance with the relevant RS standards. The immunity test signal from the RS system meet the required specifications in IEC 61000-4-3 through the calibration for the uniform field strength and monitoring for the test level with the uncertainty evaluation report for the electrical filed strength as being 3.57 dB.

Electrical fast transient/burst

As what is concluded in the document from Note2 of clause 5.4.6.2 of ISO/IEC 17025: 1999[2], the requirements for measurement uncertainty in EFT/Burst testing are deemed to have been satisfied, and the testing is reported in accordance with the relevant EFT/Burst standards. The immunity test signal from the EFT/Burst system meet the required specifications in IEC 61000-4-4 through the calibration report with the calibrated uncertainty for the waveform of voltage, frequency and timing as being 4 %, and 2.5%.

Surge

As what is concluded in the document from Note2 of clause 5.4.6.2 of ISO/IEC 17025: 1999[2], the requirements for measurement uncertainty in Surge testing are deemed to have been satisfied, and the testing is reported in accordance with the relevant Surge standards. The immunity test signal from the Surge system meet the required specifications in IEC 61000-4-5 through the calibration report with the calibrated uncertainty for the waveform of voltage and timing as being 3.5 % and 0.1%.

Conducted susceptibility

As what is concluded in the document from Note2 of clause 5.4.6.2 of ISO/IEC 17025: 1999[2], the requirements for measurement uncertainty in CS testing are deemed to have been satisfied, and the testing is reported in accordance with the relevant CS standards. The immunity test signal from the CS system meet the required specifications in IEC 61000-4-6 through the calibration for unmodulated signal and monitoring for the test level with the uncertainty evaluation report for the injected modulated signal level through CDN and EM Clamp/Direct Injection as being 2.0 dB and 2.61 dB.

Power frequency magnetic field

As what is concluded in the document from Note2 of clause 5.4.6.2 of ISO/IEC 17025: 1999[2], the requirements for measurement uncertainty in PFM testing are deemed to have been satisfied, and the testing is reported in accordance with the relevant PFM standards. The immunity test signal from the PFM system meet the required specifications in IEC 61000-4-8 through the calibration report with the calibrated uncertainty for the Gauss Meter to verify the output level of magnetic field strength as being 2.0 %.

Voltage dips and interruption

As what is concluded in the document from Note2 of clause 5.4.6.2 of ISO/IEC 17025: 1999[2], the requirements for measurement uncertainty in DIP testing are deemed to have been satisfied, and the testing is reported in accordance with the relevant DIP standards. The immunity test signal from the DIP system meet the required specifications in IEC 61000-4-11 through the calibration report with the calibrated uncertainty for the waveform of voltage and timing as being 3.5 % and 0.1%.

2.4. Test Environment


Performed Item	Items	Required	Actual
Conducted Emission	Temperature (°C)	15-35	25
	Humidity (%RH)	25-75	50
	Barometric pressure (mbar)	860-1060	950-1000
Impedance Stabilization Network	Temperature (°C)	15-35	25
	Humidity (%RH)	25-75	50
	Barometric pressure (mbar)	860-1060	950-1000
Radiated Emission	Temperature (°C)	15-35	25
	Humidity (%RH)	25-75	50
	Barometric pressure (mbar)	860-1060	950-1000
Electrostatic Discharge	Temperature (°C)	15-35	22
	Humidity (%RH)	30-60	50
	Barometric pressure (mbar)	860-1060	950-1000
Radiated susceptibility	Temperature (°C)	15-35	20
	Humidity (%RH)	25-75	55
	Barometric pressure (mbar)	860-1060	950-1000
Electrical fast transient/burst	Temperature (°C)	15-35	20
	Humidity (%RH)	25-75	55
	Barometric pressure (mbar)	860-1060	950-1000
Surge	Temperature (°C)	15-35	20
	Humidity (%RH)	10-75	55
	Barometric pressure (mbar)	860-1060	950-1000
Conducted susceptibility	Temperature (°C)	15-35	20
	Humidity (%RH)	25-75	55
	Barometric pressure (mbar)	860-1060	950-1000
Power frequency magnetic field	Temperature (°C)	15-35	20
	Humidity (%RH)	25-75	55
	Barometric pressure (mbar)	860-1060	950-1000
Voltage dips and interruption	Temperature (°C)	15-35	20
	Humidity (%RH)	25-75	55
	Barometric pressure (mbar)	860-1060	950-1000

3. Conducted Emission (Main Terminals)

3.1. Test Specification

According to EMC Standard : EN 55022

3.2. Test Setup

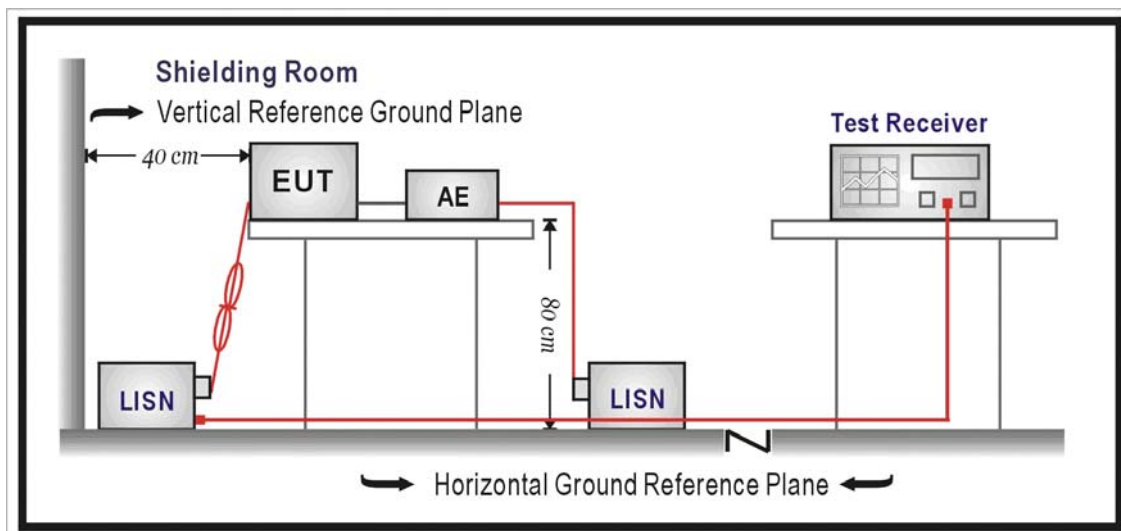

3.3. Limit

Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50-5.0	56	46
5.0 - 30	60	50

Remarks: In the above table, the tighter limit applies at the band edges.

3.4. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination.

(Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed on conducted measurement.


Conducted emissions were invested over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

3.5. Deviation from Test Standard


No deviation.

3.6. Test Result

Site : SR_1	Time : 2011/02/12 - 05:03
Limit : CISPR_B_00M_QP	Margin : 10
EUT : Network Camera	Probe : ENV_216_L1 - Line1
Power : AC 230V/50Hz	Note : Mode 1

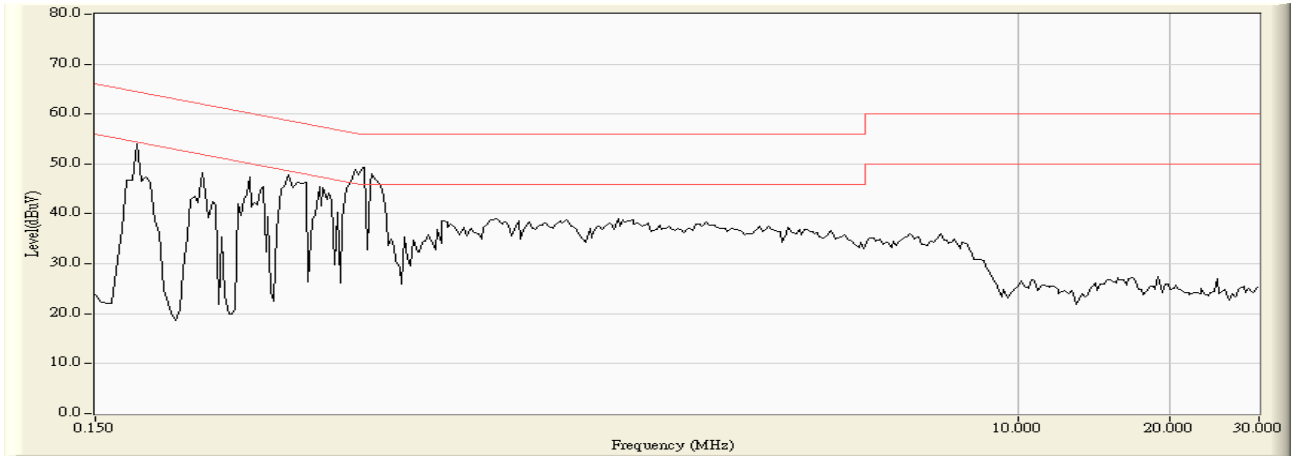

Site : SR_1	Time : 2011/02/12 - 05:04
Limit : CISPR_B_00M_QP	Margin : 0
EUT : Network Camera	Probe : ENV_216_L1 - Line1
Power : AC 230V/50Hz	Note : Mode 1

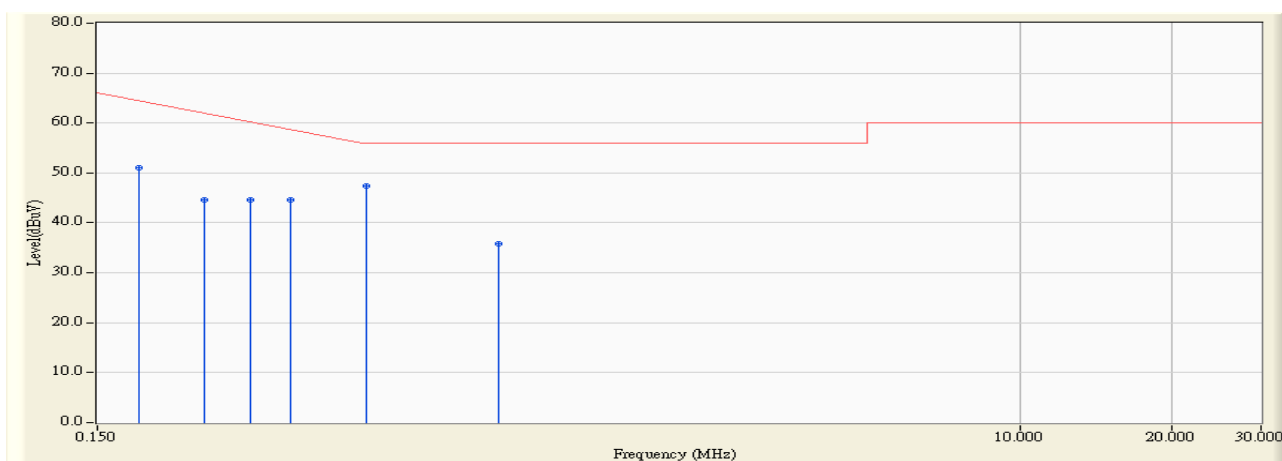


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1		0.181	9.790	41.170	50.960	-14.154	65.114	QUASIPeAK
2		0.244	9.790	34.900	44.690	-18.624	63.314	QUASIPeAK
3		0.302	9.790	34.870	44.660	-16.997	61.657	QUASIPeAK
4		0.361	9.790	34.780	44.570	-15.401	59.971	QUASIPeAK
5	*	0.509	9.790	37.670	47.460	-8.540	56.000	QUASIPeAK
6		0.935	9.800	25.940	35.740	-20.260	56.000	QUASIPeAK

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Site : SR_1	Time : 2011/02/12 - 05:04
Limit : CISPR_B_00M_AV	Margin : 0
EUT : Network Camera	Probe : ENV_216_L1 - Line1
Power : AC 230V/50Hz	Note : Mode 1

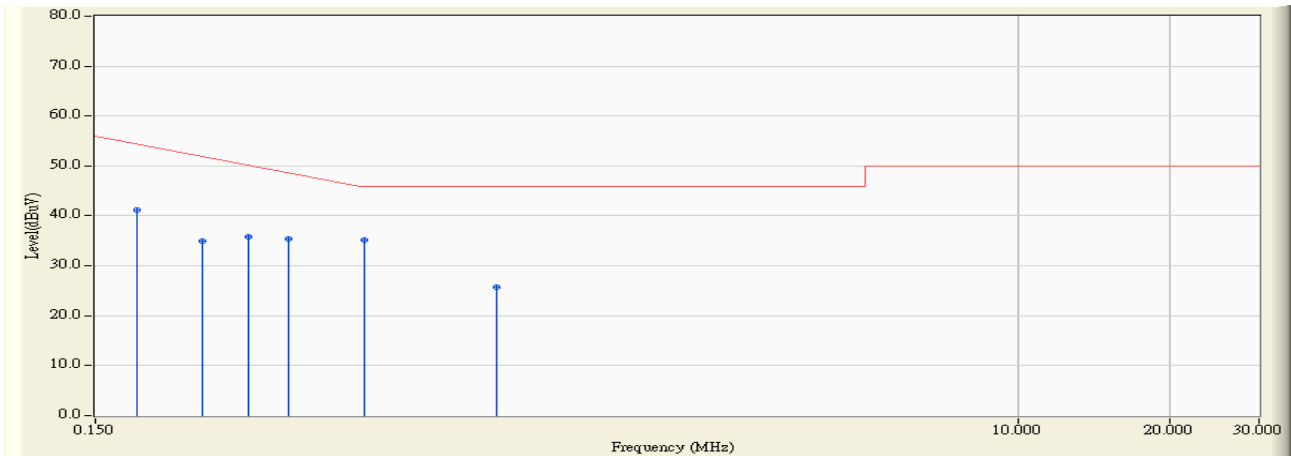

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1		0.181	9.790	31.350	41.140	-13.974	55.114	AVERAGE
2		0.244	9.790	25.240	35.030	-18.284	53.314	AVERAGE
3		0.302	9.790	25.990	35.780	-15.877	51.657	AVERAGE
4		0.361	9.790	25.570	35.360	-14.611	49.971	AVERAGE
5	*	0.509	9.790	25.420	35.210	-10.790	46.000	AVERAGE
6		0.935	9.800	16.040	25.840	-20.160	46.000	AVERAGE


Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Site : SR_1	Time : 2011/02/12 - 05:05
Limit : CISPR_B_00M_QP	Margin : 10
EUT : Network Camera	Probe : ENV_216_N - Line2
Power : AC 230V/50Hz	Note : Mode 1



Site : SR_1	Time : 2011/02/12 - 05:06
Limit : CISPR_B_00M_QP	Margin : 0
EUT : Network Camera	Probe : ENV_216_N - Line2
Power : AC 230V/50Hz	Note : Mode 1

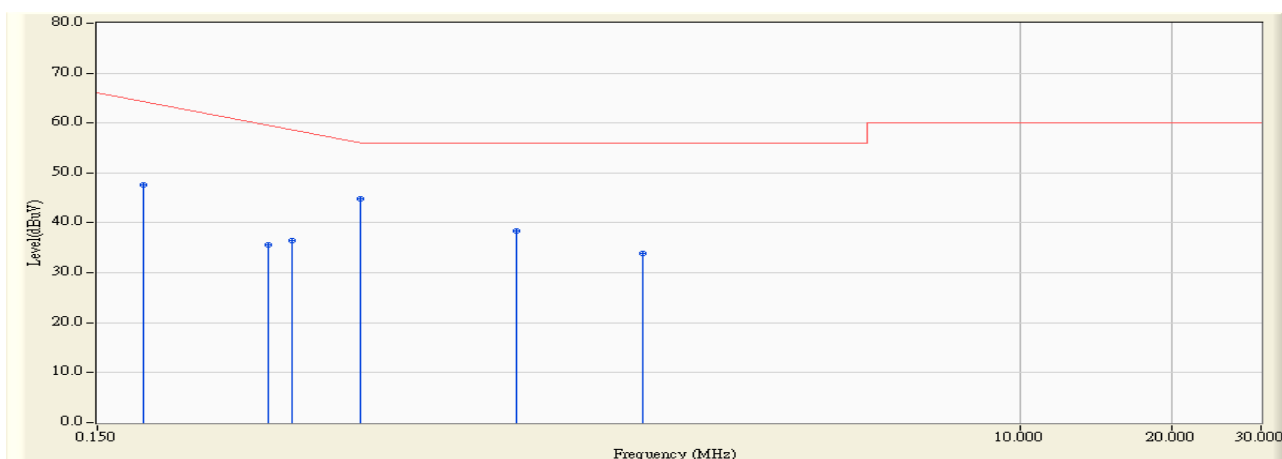


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1		0.185	9.780	37.780	47.560	-17.440	65.000	QUASIPeAK
2		0.326	9.790	25.810	35.600	-25.371	60.971	QUASIPeAK
3		0.365	9.790	26.690	36.480	-23.377	59.857	QUASIPeAK
4	*	0.498	9.790	34.980	44.770	-11.287	56.057	QUASIPeAK
5		1.013	9.790	28.630	38.420	-17.580	56.000	QUASIPeAK
6		1.798	9.800	24.040	33.840	-22.160	56.000	QUASIPeAK

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Site : SR_1	Time : 2011/02/12 - 05:06
Limit : CISPR_B_00M_AV	Margin : 0
EUT : Network Camera	Probe : ENV_216_N - Line2
Power : AC 230V/50Hz	Note : Mode 1

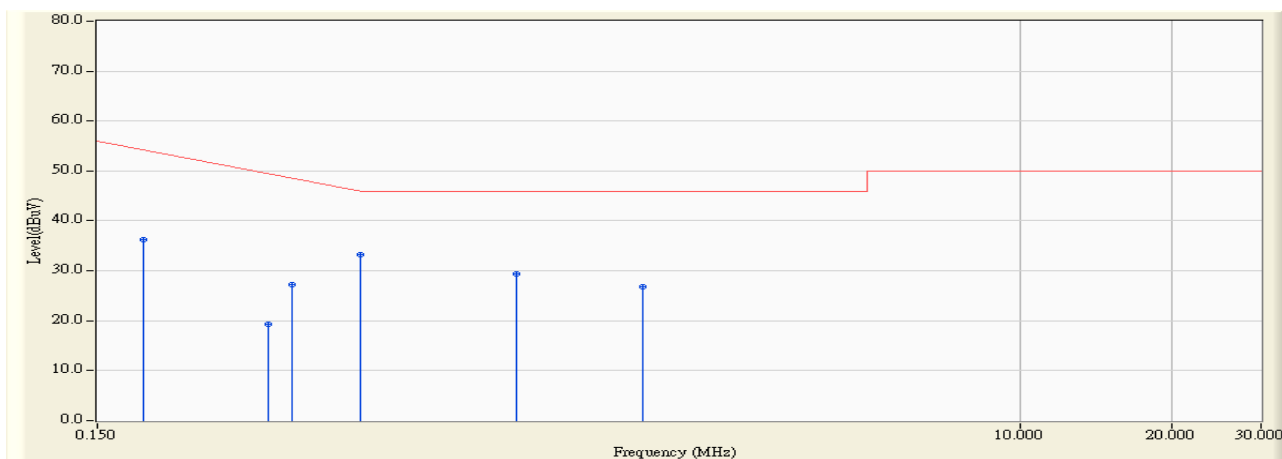


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1		0.185	9.780	26.540	36.320	-18.680	55.000	AVERAGE
2		0.326	9.790	9.500	19.290	-31.681	50.971	AVERAGE
3		0.365	9.790	17.390	27.180	-22.677	49.857	AVERAGE
4	*	0.498	9.790	23.400	33.190	-12.867	46.057	AVERAGE
5		1.013	9.790	19.640	29.430	-16.570	46.000	AVERAGE
6		1.798	9.800	16.940	26.740	-19.260	46.000	AVERAGE


Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Site : SR_1	Time : 2011/02/17 - 14:44
Limit : CISPR_B_00M_QP	Margin : 10
Probe : ENV216-L1 - Line1	Power : AC 24V
EUT : Network Camera	Note : Mode 2

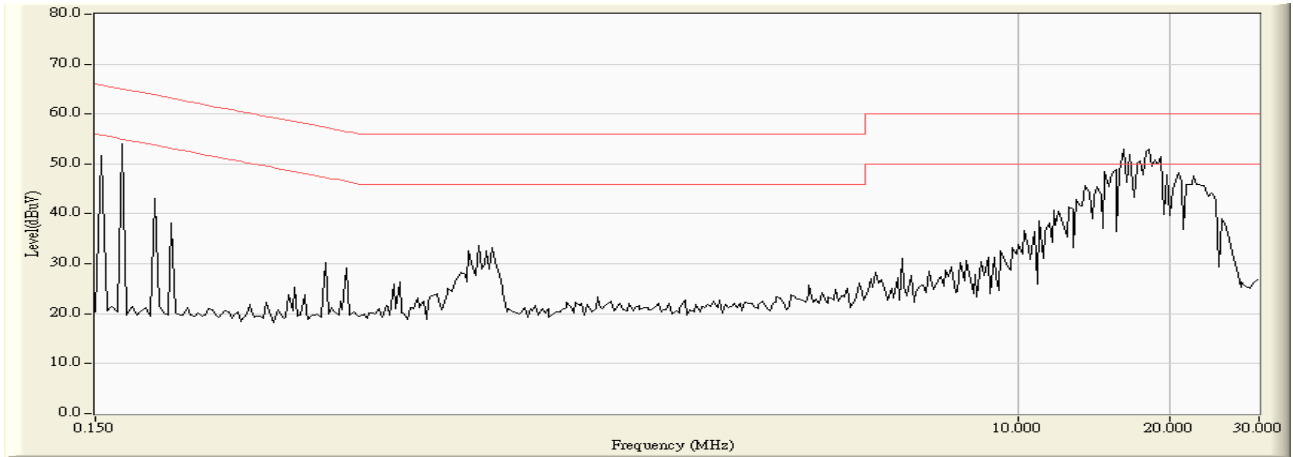

Site : SR_1	Time : 2011/02/17 - 14:46
Limit : CISPR_B_00M_QP	Margin : 0
Probe : ENV216-L1 - Line1	Power : AC 24V
EUT : Network Camera	Note : Mode 2

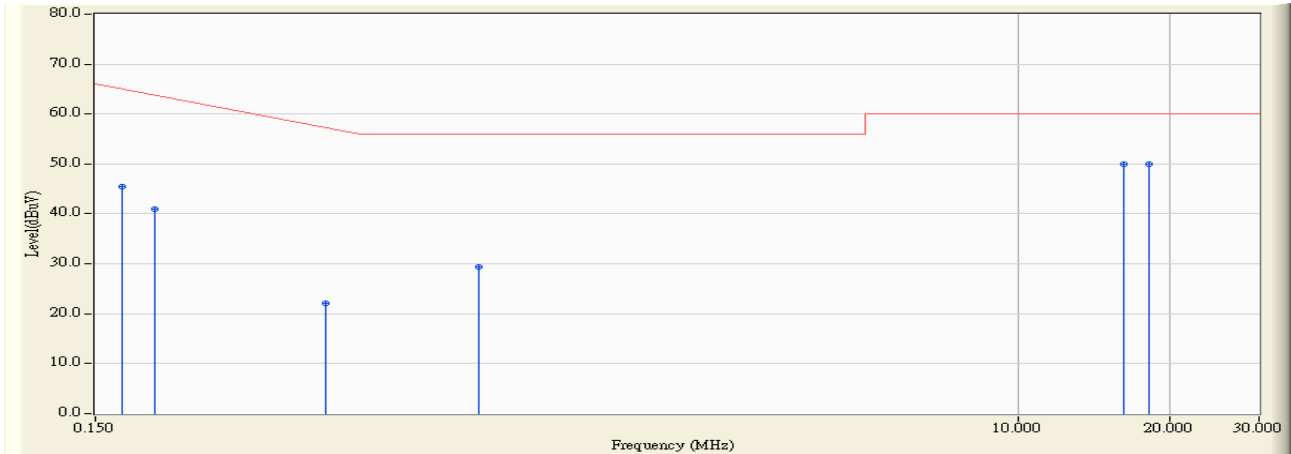


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1		0.170	9.740	35.670	45.410	-20.019	65.429	QUASIPeAK
2		0.197	9.709	31.160	40.869	-23.788	64.657	QUASIPeAK
3		0.427	9.641	12.390	22.031	-36.055	58.086	QUASIPeAK
4		0.861	9.662	19.710	29.372	-26.628	56.000	QUASIPeAK
5		16.170	9.990	39.950	49.940	-10.060	60.000	QUASIPeAK
6	*	18.224	9.970	40.070	50.040	-9.960	60.000	QUASIPeAK

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

Site : SR_1	Time : 2011/02/17 - 14:46
Limit : CISPR_B_00M_AV	Margin : 0
Probe : ENV216-L1 - Line1	Power : AC 24V
EUT : Network Camera	Note : Mode 2

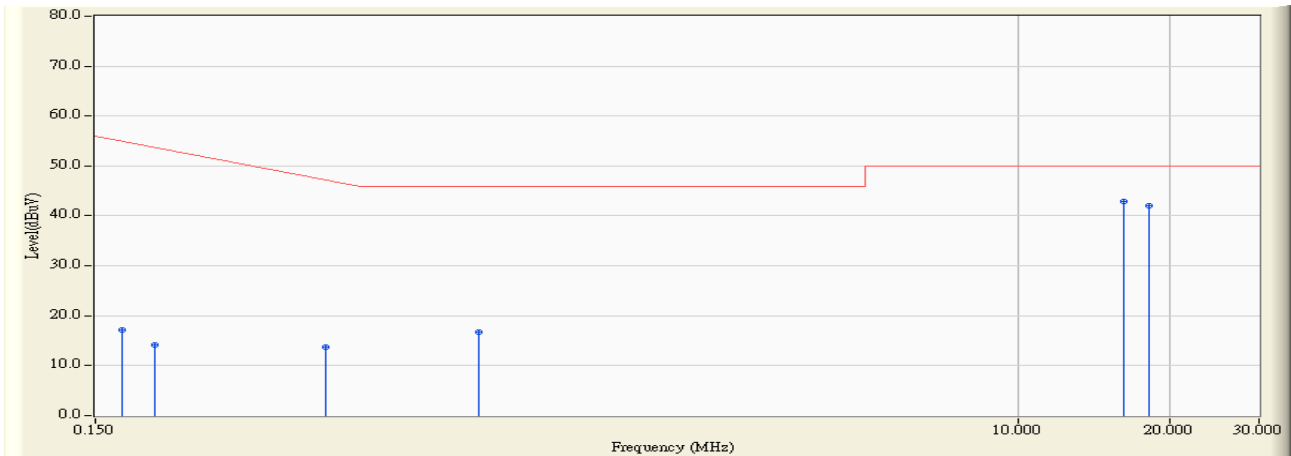


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1		0.170	9.740	7.430	17.170	-38.259	55.429	AVERAGE
2		0.197	9.709	4.410	14.119	-40.538	54.657	AVERAGE
3		0.427	9.641	4.070	13.711	-33.600	47.311	AVERAGE
4		0.861	9.662	7.070	16.732	-29.268	46.000	AVERAGE
5	*	16.170	9.990	32.800	42.790	-7.210	50.000	AVERAGE
6		18.224	9.970	32.080	42.050	-7.950	50.000	AVERAGE


Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

Site : SR_1	Time : 2011/02/17 - 14:47
Limit : CISPR_B_00M_QP	Margin : 10
Probe : ENV216-N - Line2	Power : AC 24V
EUT : Network Camera	Note : Mode 2

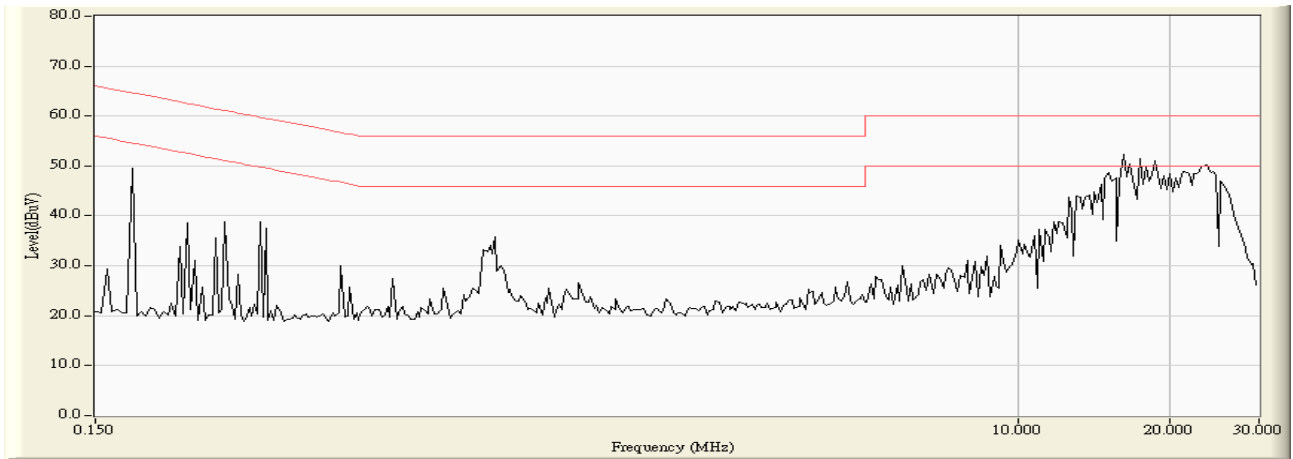

Site : SR_1	Time : 2011/02/17 - 14:49
Limit : CISPR_B_00M_QP	Margin : 0
Probe : ENV216-N - Line2	Power : AC 24V
EUT : Network Camera	Note : Mode 2

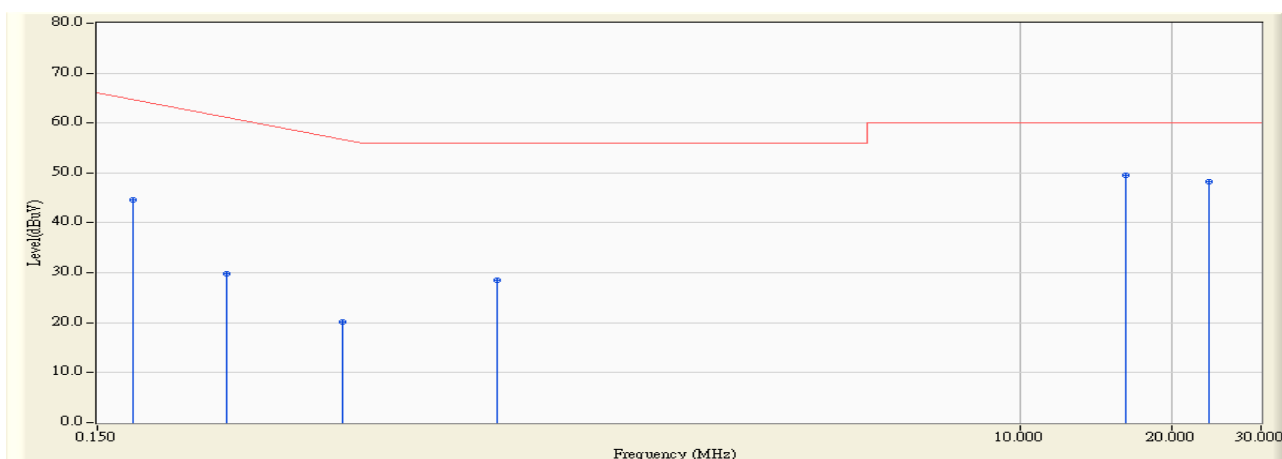


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1		0.177	9.736	34.790	44.526	-20.703	65.229	QUASPEAK
2		0.271	9.672	20.240	29.912	-32.631	62.543	QUASPEAK
3		0.459	9.640	10.610	20.250	-36.921	57.171	QUASPEAK
4		0.923	9.670	18.840	28.510	-27.490	56.000	QUASPEAK
5	*	16.168	10.000	39.610	49.610	-10.390	60.000	QUASPEAK
6		23.612	10.030	38.290	48.320	-11.680	60.000	QUASPEAK

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

Site : SR_1	Time : 2011/02/17 - 14:49
Limit : CISPR_B_00M_AV	Margin : 0
Probe : ENV216-N - Line2	Power : AC 24V
EUT : Network Camera	Note : Mode 2

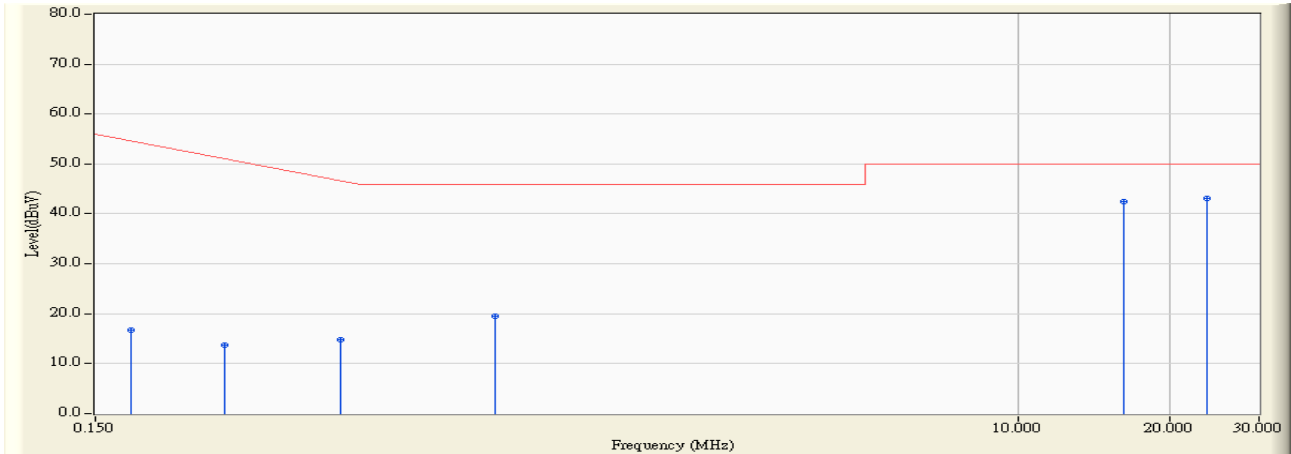

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1		0.177	9.736	6.960	16.696	-38.533	55.229	AVERAGE
2		0.271	9.672	4.130	13.802	-37.285	51.087	AVERAGE
3		0.459	9.640	5.140	14.780	-31.931	46.711	AVERAGE
4		0.923	9.670	9.750	19.420	-26.580	46.000	AVERAGE
5		16.168	10.000	32.380	42.380	-7.620	50.000	AVERAGE
6	*	23.612	10.030	33.030	43.060	-6.940	50.000	AVERAGE

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

3.7. Test Photograph

Test Mode : Mode 1: Adapter Mode

Description : Front View of Conducted Test



Test Mode : Mode 1: Adapter Mode

Description : Back View of Conducted Test



Test Mode : Mode 2: AC 24V Mode
Description : Front View of Conducted Test



Test Mode : Mode 2: AC 24V Mode
Description : Back View of Conducted Test




4. Conducted Emissions (Telecommunication Ports)

4.1. Test Specification

According to EMC Standard : EN 55022

4.2. Test Setup

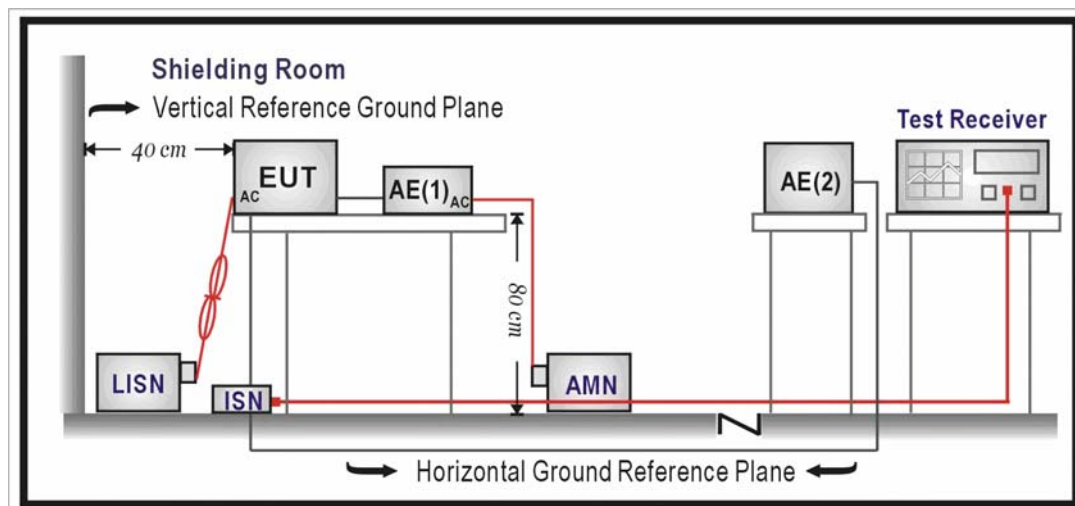

4.3. Limit

Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	84 – 74	74 – 64
0.50 - 30	74	64

Remarks:

The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz~0.50 MHz.

4.4. Test Procedure

Telecommunication Port:

The mains voltage shall be supplied to the EUT via the LISN when the measurement of telecommunication port is performed. The common mode disturbances at the telecommunication port shall be connected to the ISN, which is 150 ohm impedance.

Both alternative cables are tested related to the LCL requested. The measurement range is from 150kHz to 30MHz. The bandwidth of measurement is set to 9kHz.


The 75dB LCL ISN is used for cat. 6 cable, the 65dB LCL ISN is used for cat. 5 cable, 55dB LCL ISN is used for cat. 3.

4.5. Deviation from Test Standard


No deviation.

4.6. Test Result

Site : SR_1	Time : 2011/02/12 - 05:08
Limit : ISN_Voltage_B_00M_QP	Margin : 10
EUT : Network Camera	Probe : ISN_T4 - Line1
Power : AC 230V/50Hz	Note : Mode 1,ISN 10Mbps

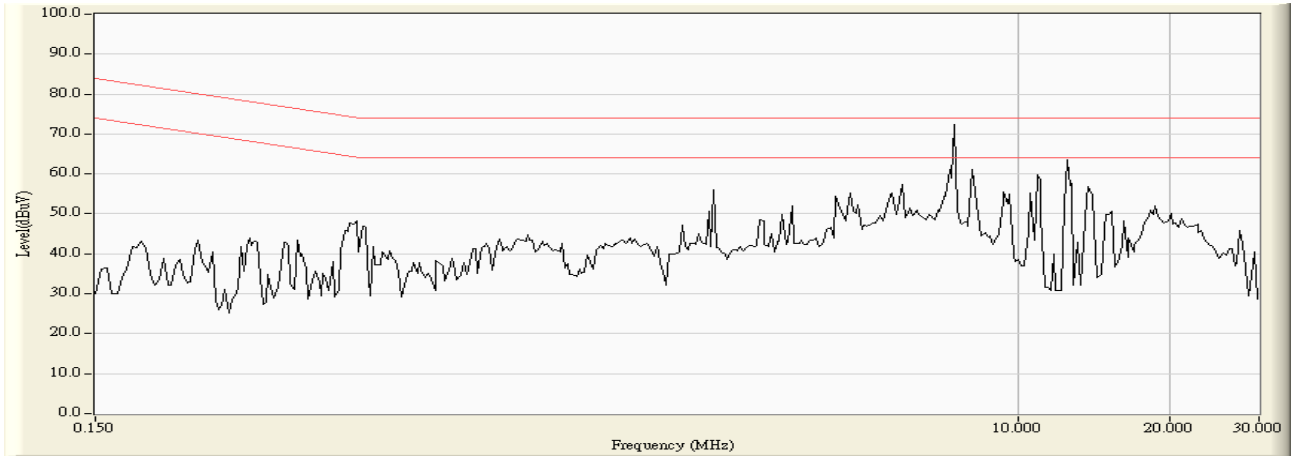

Site : SR_1	Time : 2011/02/12 - 05:10
Limit : ISN_Voltage_B_00M_QP	Margin : 0
EUT : Network Camera	Probe : ISN_T4 - Line1
Power : AC 230V/50Hz	Note : Mode 1,ISN 10Mbps

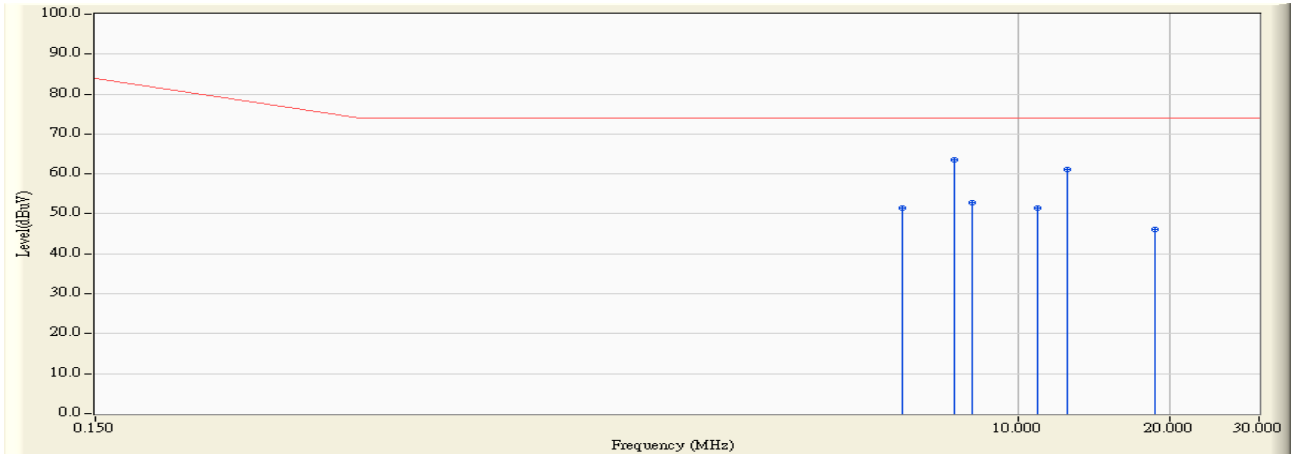


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV)	Margin (dB)	Limit (dBμV)	Detector Type
1		5.923	9.980	41.580	51.560	-22.440	74.000	QUASIPeAK
2	*	7.502	9.970	53.650	63.620	-10.380	74.000	QUASIPeAK
3		8.154	9.970	42.830	52.800	-21.200	74.000	QUASIPeAK
4		10.923	9.960	41.600	51.560	-22.440	74.000	QUASIPeAK
5		12.502	10.073	50.960	61.033	-12.967	74.000	QUASIPeAK
6		18.728	10.120	35.930	46.050	-27.950	74.000	QUASIPeAK

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Site : SR_1	Time : 2011/02/12 - 05:10
Limit : ISN_Voltage_B_00M_AV	Margin : 0
EUT : Network Camera	Probe : ISN_T4 - Line1
Power : AC 230V/50Hz	Note : Mode 1,ISN 10Mbps

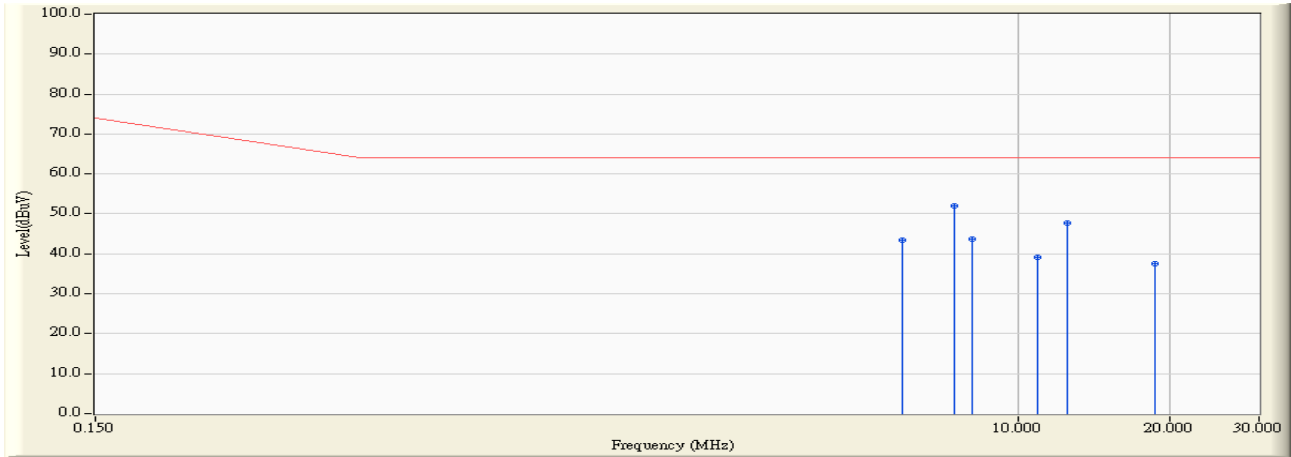


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV)	Margin (dB)	Limit (dBμV)	Detector Type
1		5.923	9.980	33.490	43.470	-20.530	64.000	AVERAGE
2	*	7.502	9.970	42.090	52.060	-11.940	64.000	AVERAGE
3		8.154	9.970	33.650	43.620	-20.380	64.000	AVERAGE
4		10.923	9.960	29.150	39.110	-24.890	64.000	AVERAGE
5		12.502	10.073	37.770	47.843	-16.157	64.000	AVERAGE
6		18.728	10.120	27.490	37.610	-26.390	64.000	AVERAGE


Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Site : SR_1	Time : 2011/02/12 - 05:07
Limit : ISN_Voltage_B_00M_QP	Margin : 10
EUT : Network Camera	Probe : ISN_T4 - Line1
Power : AC 230V/50Hz	Note : Mode 1,ISN 100Mbps

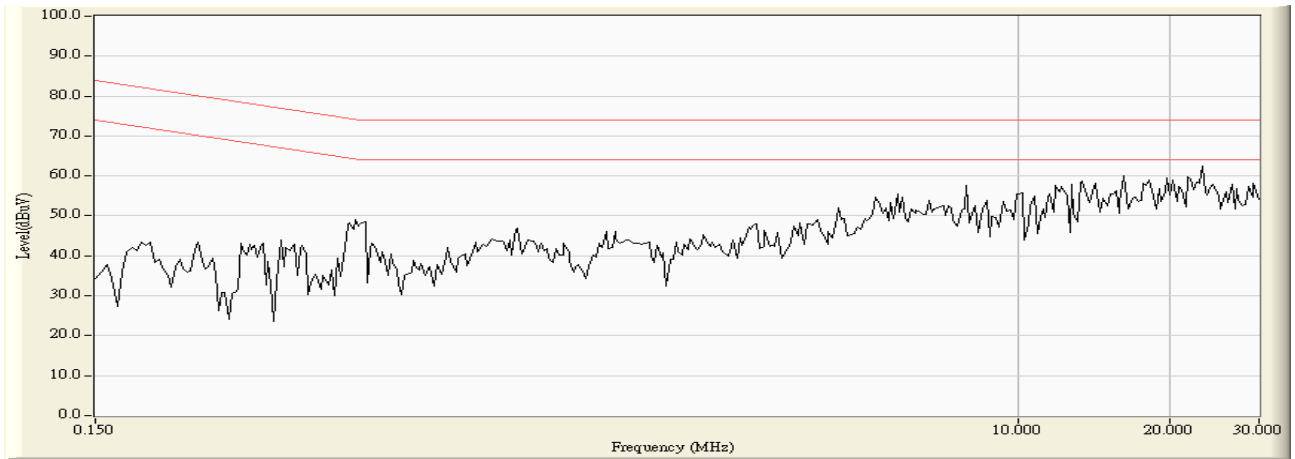

Site : SR_1	Time : 2011/02/12 - 05:08
Limit : ISN_Voltage_B_00M_QP	Margin : 0
EUT : Network Camera	Probe : ISN_T4 - Line1
Power : AC 230V/50Hz	Note : Mode 1,ISN 100Mbps

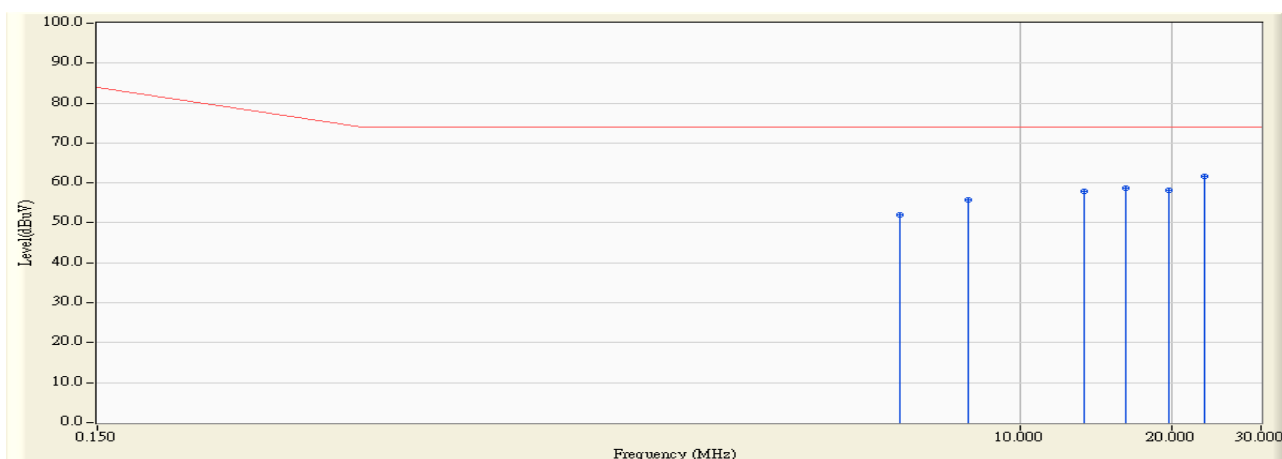


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1		5.787	9.980	42.090	52.070	-21.930	74.000	QUASIPeAK
2		7.923	9.970	45.860	55.830	-18.170	74.000	QUASIPeAK
3		13.420	10.150	47.890	58.040	-15.960	74.000	QUASIPeAK
4		16.228	10.130	48.700	58.830	-15.170	74.000	QUASIPeAK
5		19.709	10.110	47.990	58.100	-15.900	74.000	QUASIPeAK
6	*	23.130	10.100	51.530	61.630	-12.370	74.000	QUASIPeAK

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Site : SR_1	Time : 2011/02/12 - 05:08
Limit : ISN_Voltage_B_00M_AV	Margin : 0
EUT : Network Camera	Probe : ISN_T4 - Line1
Power : AC 230V/50Hz	Note : Mode 1,ISN 100Mbps

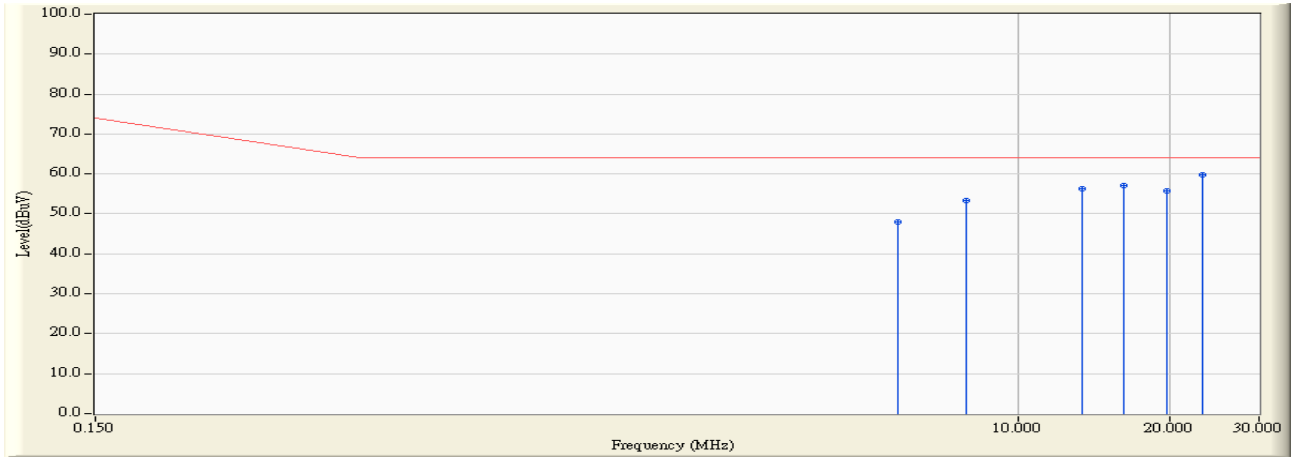


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1		5.787	9.980	37.950	47.930	-16.070	64.000	AVERAGE
2		7.923	9.970	43.440	53.410	-10.590	64.000	AVERAGE
3		13.420	10.150	46.200	56.350	-7.650	64.000	AVERAGE
4		16.228	10.130	46.980	57.110	-6.890	64.000	AVERAGE
5		19.709	10.110	45.670	55.780	-8.220	64.000	AVERAGE
6	*	23.130	10.100	49.730	59.830	-4.170	64.000	AVERAGE


Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Site : SR_1	Time : 2011/02/17 - 17:04
Limit : ISN_Voltage_B_00M_QP	Margin : 10
EUT : Network Camera	Probe : ISN_T4 - Line1
Power : AC 24V	Note : Mode 2,ISN 10Mbps

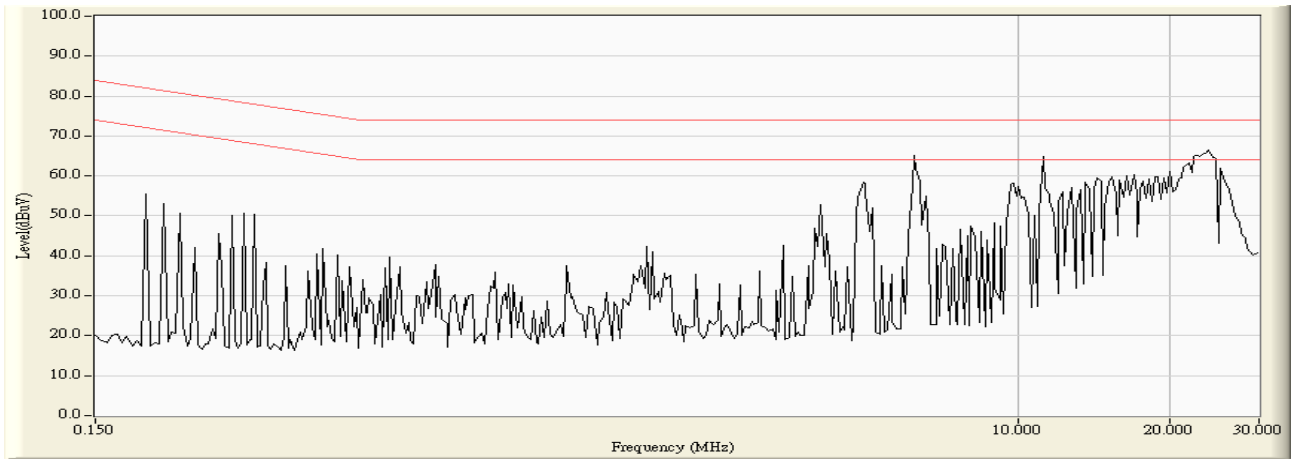

Site : SR_1	Time : 2011/02/17 - 17:07
Limit : ISN_Voltage_B_00M_QP	Margin : 0
EUT : Network Camera	Probe : ISN_T4 - Line1
Power : AC 24V	Note : Mode 2,ISN 10Mbps

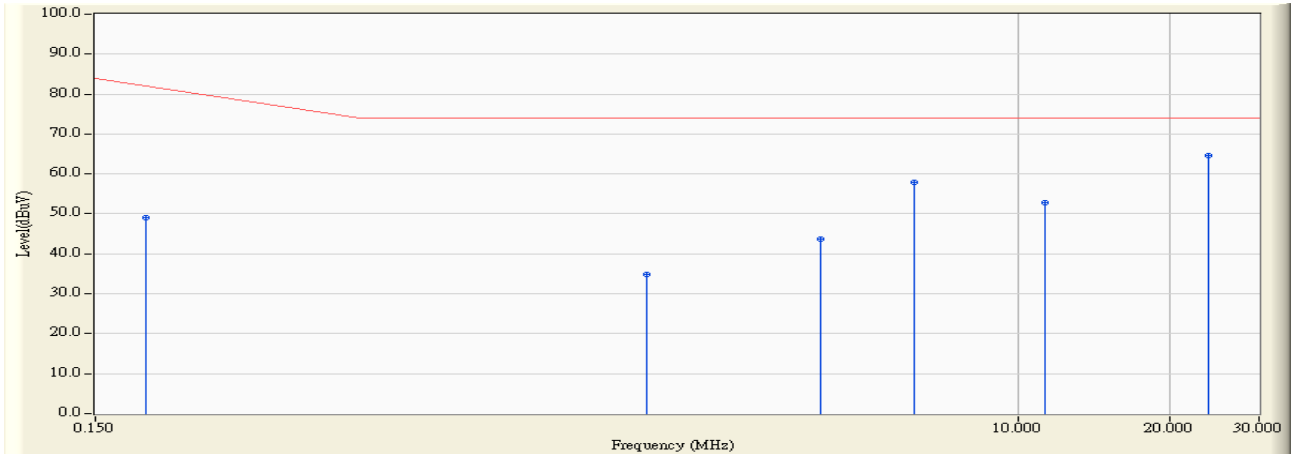


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV)	Margin (dB)	Limit (dBμV)	Detector Type
1		0.189	10.037	39.150	49.187	-33.699	82.886	QUASIPeAK
2		1.849	10.000	24.750	34.750	-39.250	74.000	QUASIPeAK
3		4.076	9.990	33.770	43.760	-30.240	74.000	QUASIPeAK
4		6.252	9.976	47.830	57.806	-16.194	74.000	QUASIPeAK
5		11.291	9.963	42.830	52.793	-21.207	74.000	QUASIPeAK
6	*	23.865	10.100	54.600	64.700	-9.300	74.000	QUASIPeAK

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Site : SR_1	Time : 2011/02/17 - 17:07
Limit : ISN_Voltage_B_00M_AV	Margin : 0
EUT : Network Camera	Probe : ISN_T4 - Line1
Power : AC 24V	Note : Mode 2,ISN 10Mbps

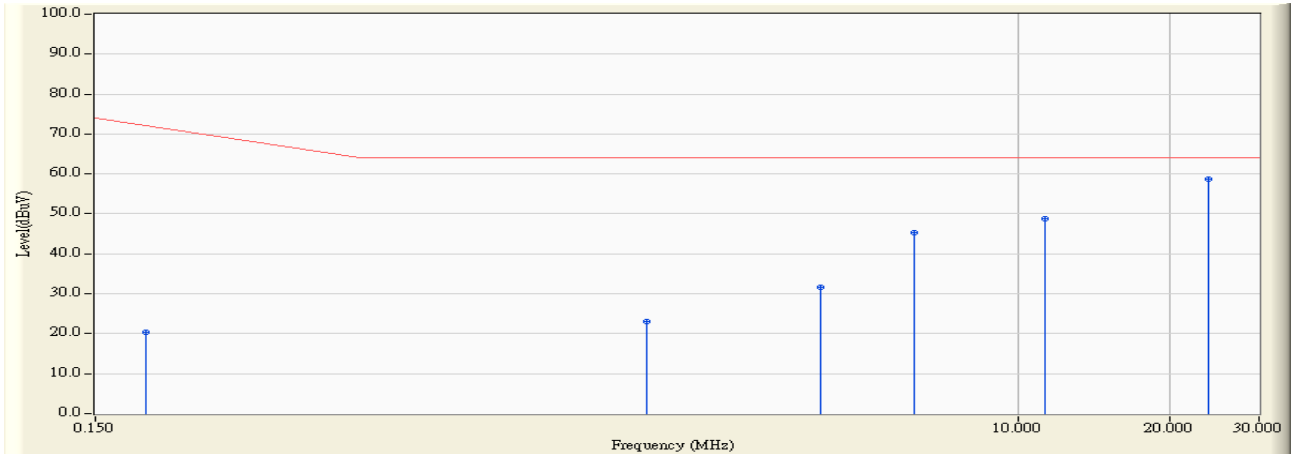


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1		0.189	10.037	10.260	20.297	-52.589	72.886	AVERAGE
2		1.849	10.000	12.950	22.950	-41.050	64.000	AVERAGE
3		4.076	9.990	21.700	31.690	-32.310	64.000	AVERAGE
4		6.252	9.976	35.370	45.346	-18.654	64.000	AVERAGE
5		11.291	9.963	38.750	48.713	-15.287	64.000	AVERAGE
6	*	23.865	10.100	48.700	58.800	-5.200	64.000	AVERAGE


Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Site : SR_1	Time : 2011/02/17 - 17:09
Limit : ISN_Voltage_B_00M_QP	Margin : 10
EUT : Network Camera	Probe : ISN_T4 - Line1
Power : AC 24V	Note : Mode 2,ISN 100Mbps

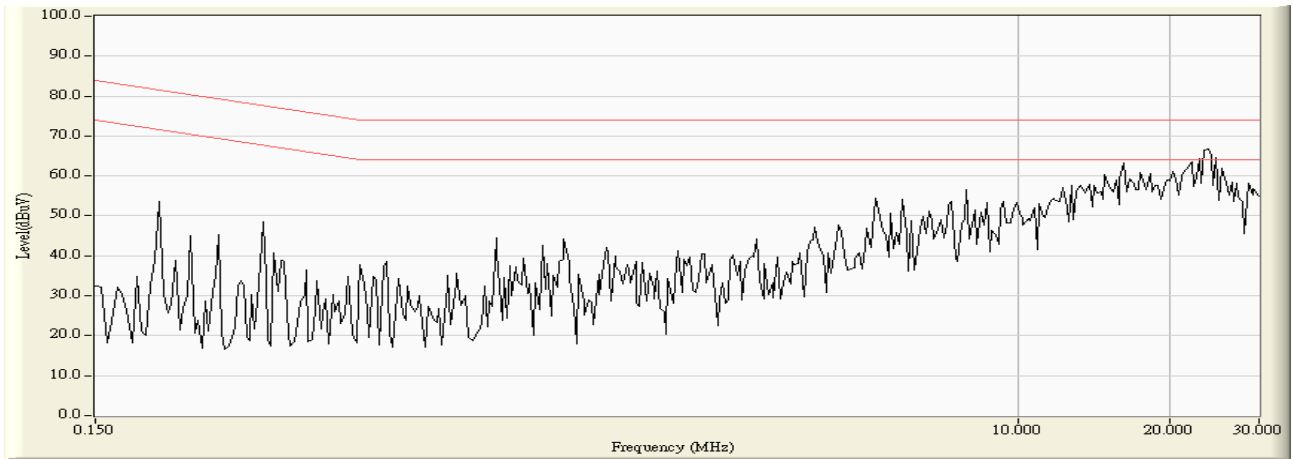

Site : SR_1	Time : 2011/02/17 - 17:10
Limit : ISN_Voltage_B_00M_QP	Margin : 0
EUT : Network Camera	Probe : ISN_T4 - Line1
Power : AC 24V	Note : Mode 2,ISN 100Mbps

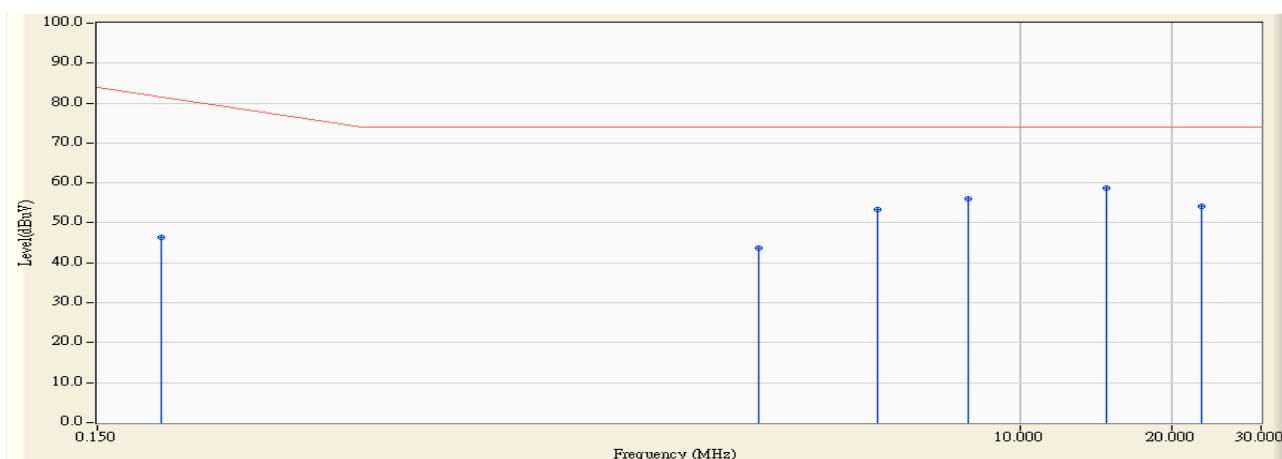


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1		0.201	10.033	36.370	46.403	-36.140	82.543	QUASIPeAK
2		3.037	9.990	33.710	43.700	-30.300	74.000	QUASIPeAK
3		5.236	9.980	43.320	53.300	-20.700	74.000	QUASIPeAK
4		7.923	9.970	46.060	56.030	-17.970	74.000	QUASIPeAK
5	*	14.884	10.140	48.700	58.840	-15.160	74.000	QUASIPeAK
6		22.825	10.100	44.020	54.120	-19.880	74.000	QUASIPeAK

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Site : SR_1	Time : 2011/02/17 - 17:10
Limit : ISN_Voltage_B_00M_AV	Margin : 0
EUT : Network Camera	Probe : ISN_T4 - Line1
Power : AC 24V	Note : Mode 2,ISN 100Mbps

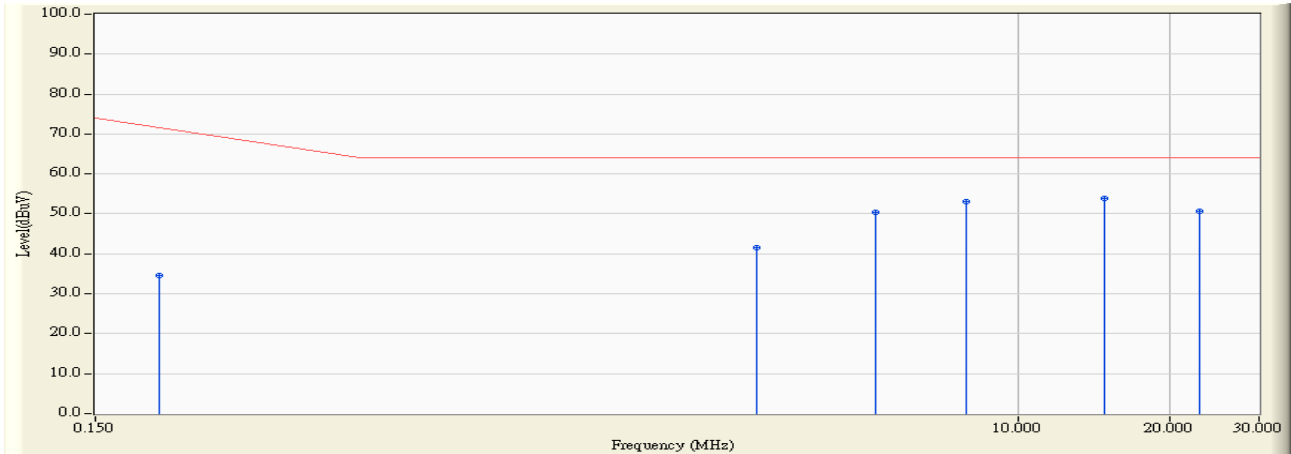


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV)	Margin (dB)	Limit (dBμV)	Detector Type
1		0.201	10.033	24.540	34.573	-37.970	72.543	AVERAGE
2		3.037	9.990	31.480	41.470	-22.530	64.000	AVERAGE
3		5.236	9.980	40.540	50.520	-13.480	64.000	AVERAGE
4		7.923	9.970	43.030	53.000	-11.000	64.000	AVERAGE
5	*	14.884	10.140	43.720	53.860	-10.140	64.000	AVERAGE
6		22.825	10.100	40.580	50.680	-13.320	64.000	AVERAGE


Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Site : SR_1	Time : 2011/02/12 - 05:21
Limit : ISN_Voltage_B_00M_QP	Margin : 10
EUT : Network Camera	Probe : CVP-2200A - Line1
Power : AC 230V/50Hz	Note : Mode 3,ISN 10Mbps

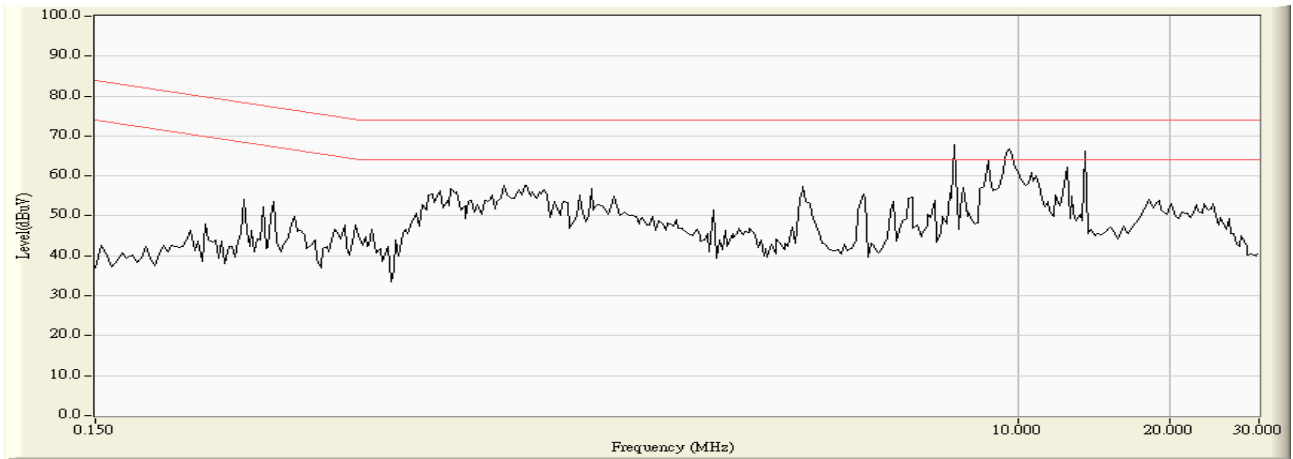

Site : SR_1	Time : 2011/02/12 - 05:24
Limit : ISN_Voltage_B_00M_QP	Margin : 0
EUT : Network Camera	Probe : CVP-2200A - Line1
Power : AC 230V/50Hz	Note : Mode 3,ISN 10Mbps

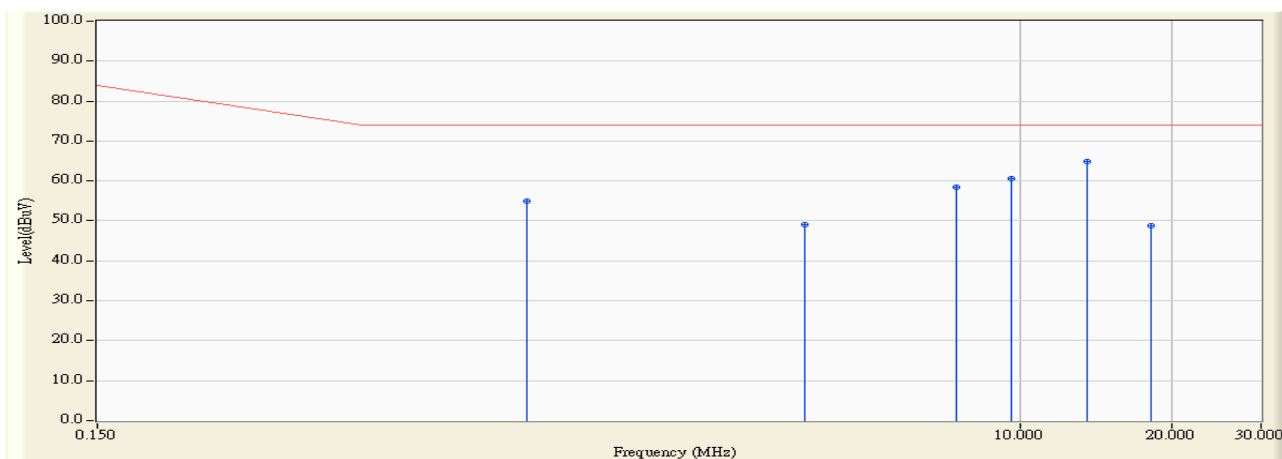


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV)	Margin (dB)	Limit (dBμV)	Detector Type
1		1.060	20.200	34.710	54.910	-19.090	74.000	QUASPEAK
2		3.752	20.200	28.880	49.080	-24.920	74.000	QUASPEAK
3		7.502	20.200	38.150	58.350	-15.650	74.000	QUASPEAK
4		9.638	20.200	40.370	60.570	-13.430	74.000	QUASPEAK
5	*	13.560	20.400	44.470	64.870	-9.130	74.000	QUASPEAK
6		18.240	20.400	28.260	48.660	-25.340	74.000	QUASPEAK

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Site : SR_1	Time : 2011/02/12 - 05:24
Limit : ISN_Voltage_B_00M_AV	Margin : 0
EUT : Network Camera	Probe : CVP-2200A - Line1
Power : AC 230V/50Hz	Note : Mode 3,ISN 10Mbps

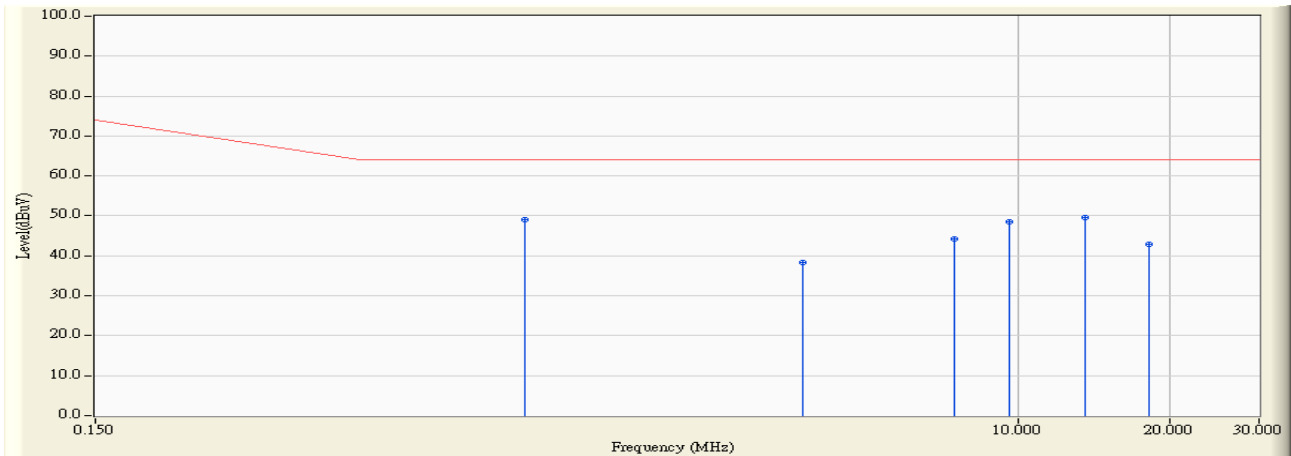


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1		1.060	20.200	28.930	49.130	-14.870	64.000	AVERAGE
2		3.752	20.200	18.120	38.320	-25.680	64.000	AVERAGE
3		7.502	20.200	24.000	44.200	-19.800	64.000	AVERAGE
4		9.638	20.200	28.440	48.640	-15.360	64.000	AVERAGE
5	*	13.560	20.400	29.150	49.550	-14.450	64.000	AVERAGE
6		18.240	20.400	22.480	42.880	-21.120	64.000	AVERAGE


Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Site : SR_1	Time : 2011/02/12 - 05:24
Limit : ISN_Voltage_B_00M_QP	Margin : 10
EUT : Network Camera	Probe : CVP-2200A - Line1
Power : AC 230V/50Hz	Note : Mode 3,ISN 100Mbps

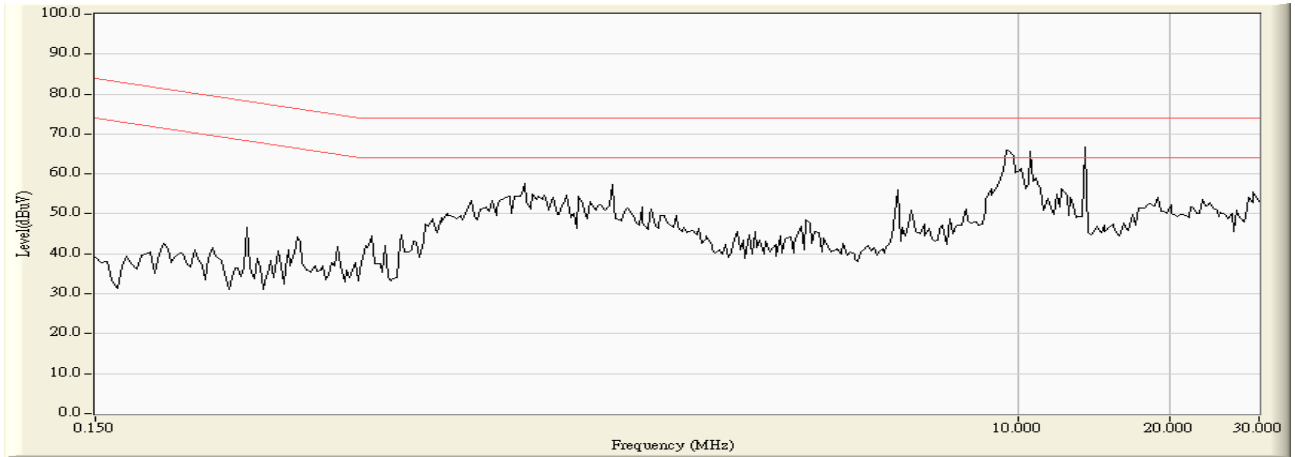

Site : SR_1	Time : 2011/02/12 - 05:25
Limit : ISN_Voltage_B_00M_QP	Margin : 0
EUT : Network Camera	Probe : CVP-2200A - Line1
Power : AC 230V/50Hz	Note : Mode 3,ISN 100Mbps

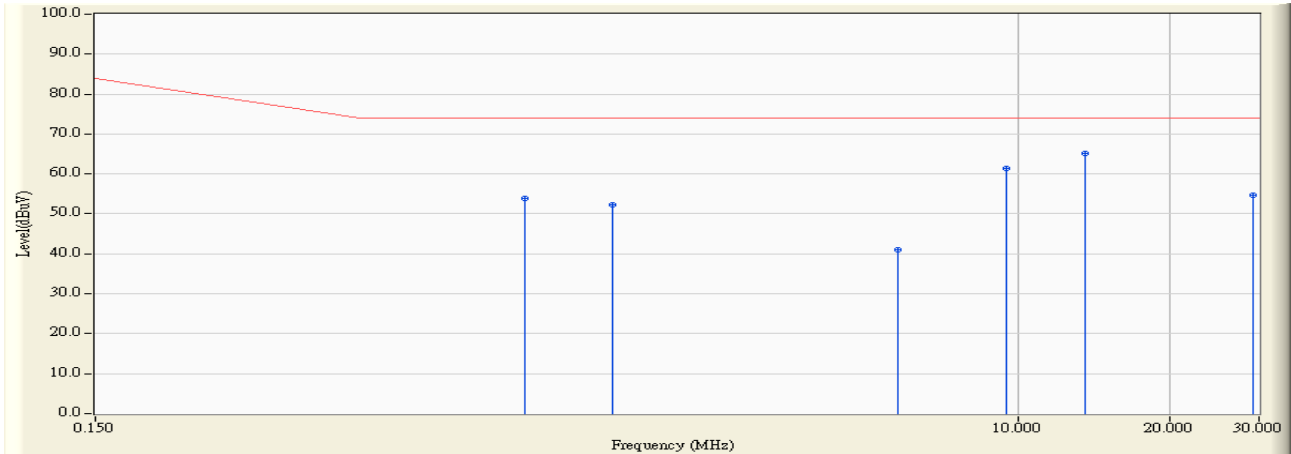


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1		1.060	20.200	33.660	53.860	-20.140	74.000	QUASPEAK
2		1.584	20.200	32.050	52.250	-21.750	74.000	QUASPEAK
3		5.798	20.200	20.750	40.950	-33.050	74.000	QUASPEAK
4		9.509	20.200	41.150	61.350	-12.650	74.000	QUASPEAK
5	*	13.560	20.400	44.650	65.050	-8.950	74.000	QUASPEAK
6		29.236	20.400	34.310	54.710	-19.290	74.000	QUASPEAK

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Site : SR_1	Time : 2011/02/12 - 05:25
Limit : ISN_Voltage_B_00M_AV	Margin : 0
EUT : Network Camera	Probe : CVP-2200A - Line1
Power : AC 230V/50Hz	Note : Mode 3,ISN 100Mbps

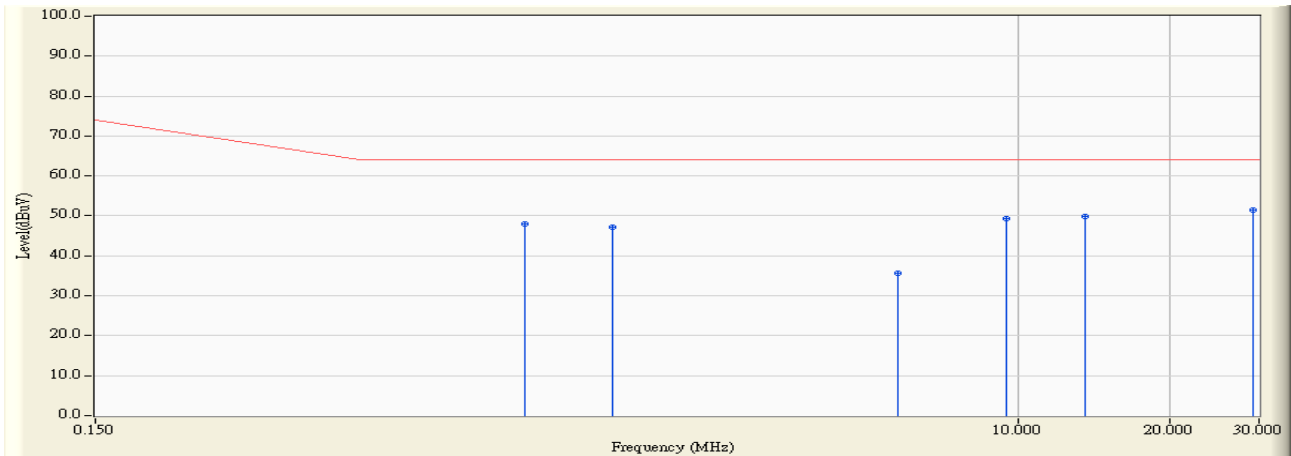

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1		1.060	20.200	27.770	47.970	-16.030	64.000	AVERAGE
2		1.584	20.200	26.940	47.140	-16.860	64.000	AVERAGE
3		5.798	20.200	15.430	35.630	-28.370	64.000	AVERAGE
4		9.509	20.200	29.090	49.290	-14.710	64.000	AVERAGE
5		13.560	20.400	29.490	49.890	-14.110	64.000	AVERAGE
6	*	29.236	20.400	31.110	51.510	-12.490	64.000	AVERAGE

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

4.7. Test Photograph

Test Mode : Mode 1: Adapter Mode

Description : Front View of ISN Test



Test Mode : Mode 1: Adapter Mode

Description : Back View of ISN Test



Test Mode : Mode 2: AC 24V Mode

Description : Front View of ISN Test



Test Mode : Mode 2: AC 24V Mode

Description : Back View of ISN Test



Test Mode : Mode 3: POE Mode

Description : Front View of ISN Test



Test Mode : Mode 3: POE Mode

Description : Back View of ISN Test




5. Radiated Emission

5.1. Test Specification


According to EMC Standard : EN 55022

5.2. Test Setup

Under 1GHz Test Setup:

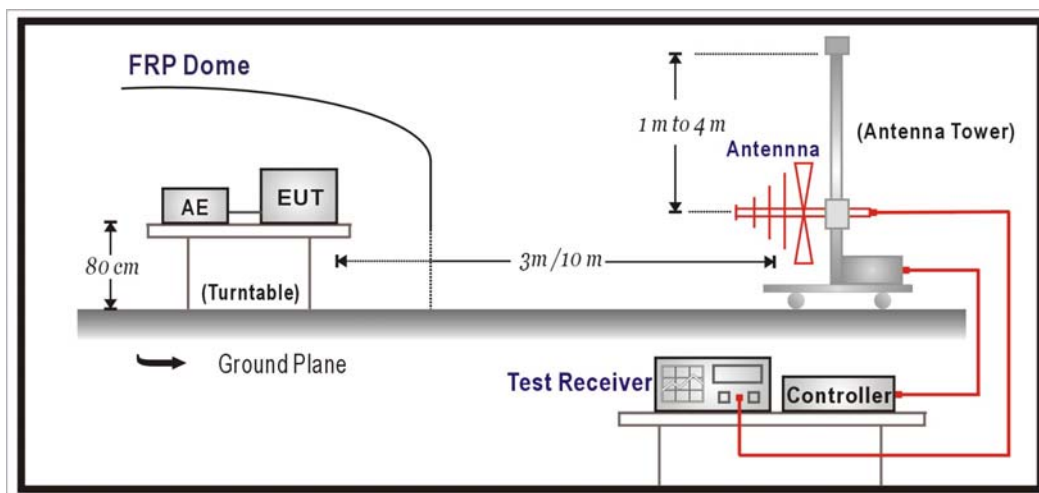

Above 1GHz Test Setup:

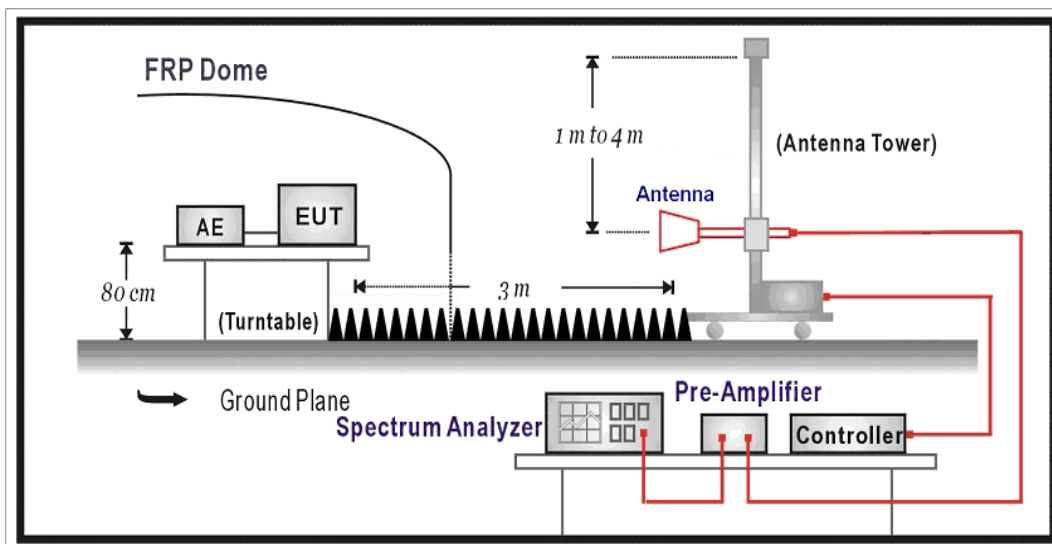

5.3. Limit

Limits		
Frequency (MHz)	Distance (m)	dBuV/m
30 – 230	10	30
230 – 1000	10	37

Limits			
Frequency (GHz)	Distance (m)	Peak (dBuV/m)	Average (dBuV/m)
1 – 3	3	70	50
3 – 6	3	74	54

Remark:

1. The tighter limit shall apply at the edge between two frequency bands.
2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5 th harmonic of the highest frequency or 6 GHz, whichever is lower

5.4. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3/10 meters. The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated on radiated measurement.

Radiated emissions were investigated over the frequency range from 30MHz to 1GHz using a receiver bandwidth of 120kHz and above 1GHz using a receiver bandwidth of 1MHz.

30MHz to 1GHz Radiated was performed at an antenna to EUT distance of 10 meters.

Above 1GHz Radiated was performed at an antenna to EUT distance of 3 meters.


It is placed with absorb on the ground between EUT and Antenna.

5.5. Deviation from Test Standard

No deviation.

5.6. Test Result

Site : OATS-2	Time : 2011/02/12 - 00:16
Limit : CISPR_B_10M_QP	Margin : 6
EUT : Network Camera	Probe : Site2_CBL6112_10M_0811 - HORIZONTAL
Power : AC 230V/50Hz	Note : Mode 1

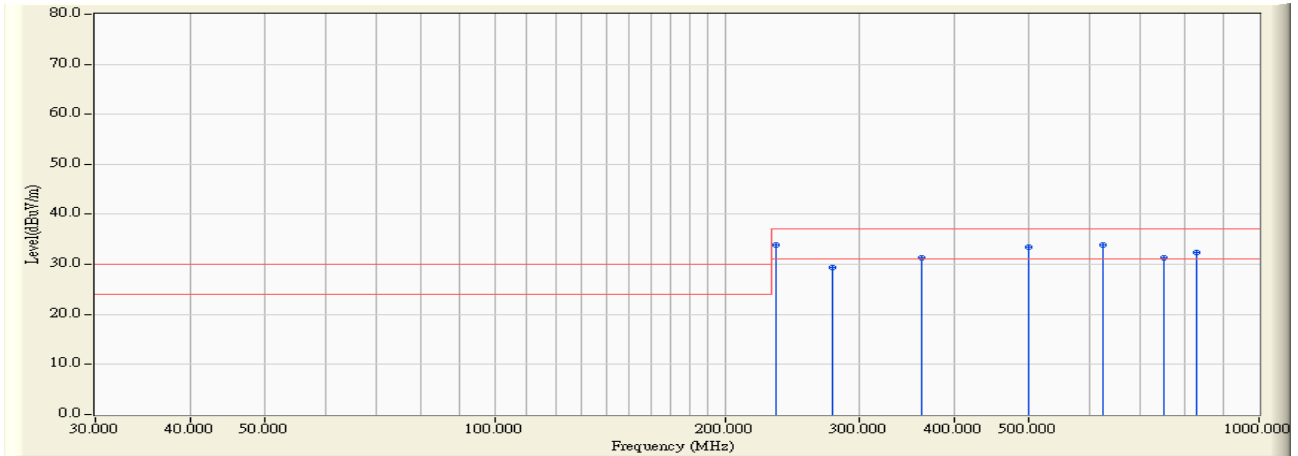


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	233.750	14.745	19.200	33.944	-3.056	37.000	QUASPEAK
2		276.250	16.586	12.800	29.386	-7.614	37.000	QUASPEAK
3		361.250	18.830	12.400	31.230	-5.770	37.000	QUASPEAK
4		500.000	21.905	11.600	33.505	-3.495	37.000	QUASPEAK
5		625.000	23.740	10.200	33.940	-3.060	37.000	QUASPEAK
6		750.000	25.180	6.200	31.380	-5.620	37.000	QUASPEAK
7		829.200	26.248	6.200	32.448	-4.552	37.000	QUASPEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Site : OATS-2	Time : 2011/02/12 - 00:07
Limit : CISPR_B_10M_QP	Margin : 6
EUT : Network Camera	Probe : Site2_CBL6112_10M_0811 - VERTICAL
Power : AC 230V/50Hz	Note : Mode 1

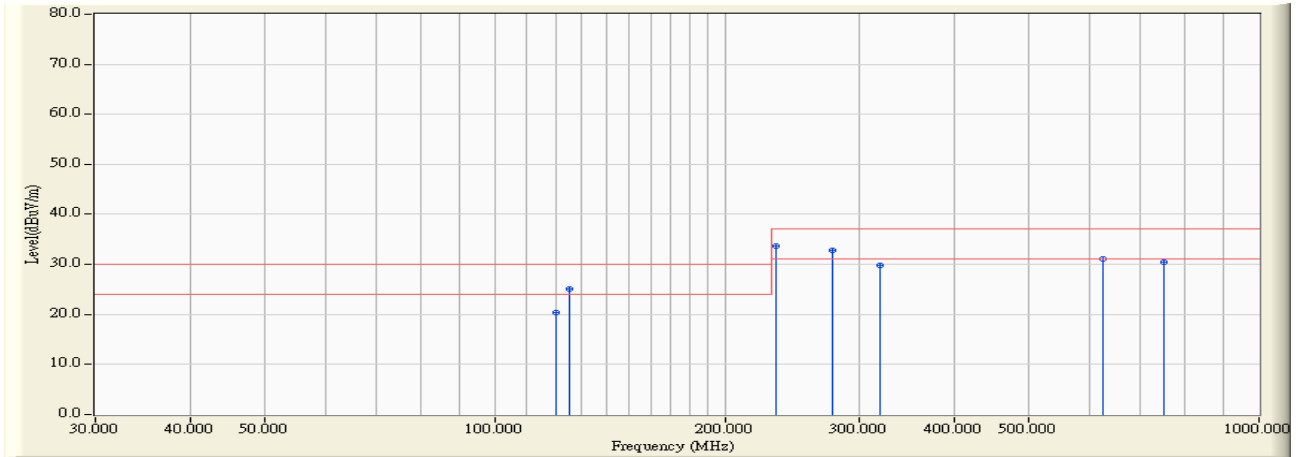


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		120.000	14.848	5.600	20.448	-9.552	30.000	QUASPEAK
2		125.000	14.741	10.400	25.141	-4.859	30.000	QUASPEAK
3	*	233.750	14.745	18.900	33.644	-3.356	37.000	QUASPEAK
4		276.300	16.587	16.300	32.888	-4.112	37.000	QUASPEAK
5		318.750	17.661	12.200	29.860	-7.140	37.000	QUASPEAK
6		625.000	23.740	7.300	31.040	-5.960	37.000	QUASPEAK
7		750.000	25.180	5.300	30.480	-6.520	37.000	QUASPEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Site : OATS-2	Time : 2011/02/12 - 01:02
Limit : CISPR_B_10M_QP	Margin : 6
EUT : Network Camera	Probe : Site2_CBL6112_10M_0811 - HORIZONTAL
Power : AC 24V	Note : Mode 2

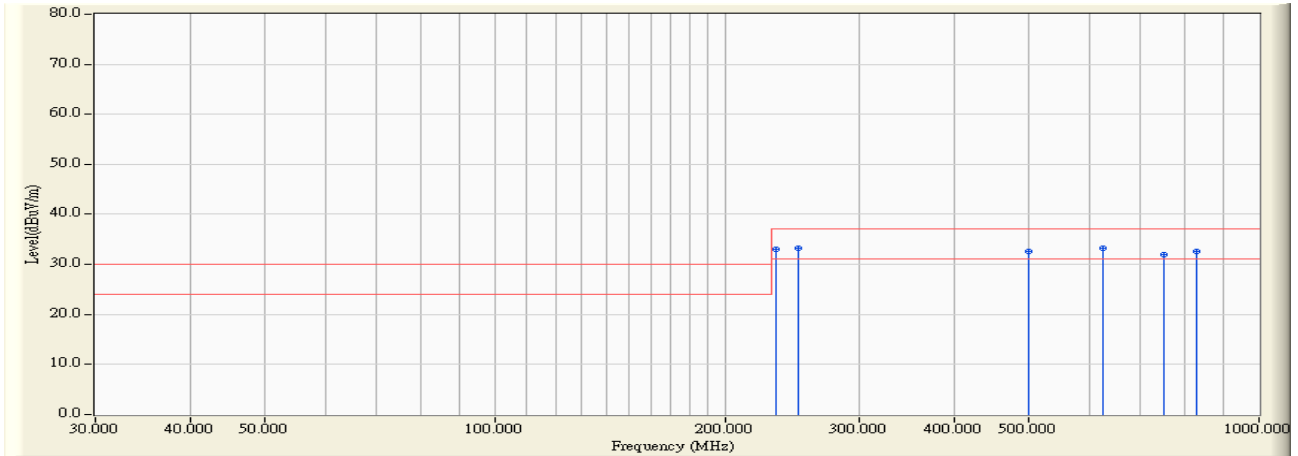


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		233.750	14.745	18.200	32.944	-4.056	37.000	QUASPEAK
2	*	250.000	15.948	17.400	33.348	-3.652	37.000	QUASPEAK
3		500.000	21.905	10.600	32.505	-4.495	37.000	QUASPEAK
4		625.000	23.740	9.600	33.340	-3.660	37.000	QUASPEAK
5		750.000	25.180	6.800	31.980	-5.020	37.000	QUASPEAK
6		828.600	26.236	6.300	32.536	-4.464	37.000	QUASPEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Site : OATS-2	Time : 2011/02/12 - 00:56
Limit : CISPR_B_10M_QP	Margin : 6
EUT : Network Camera	Probe : Site2_CBL6112_10M_0811 - VERTICAL
Power : AC 24V	Note : Mode 2

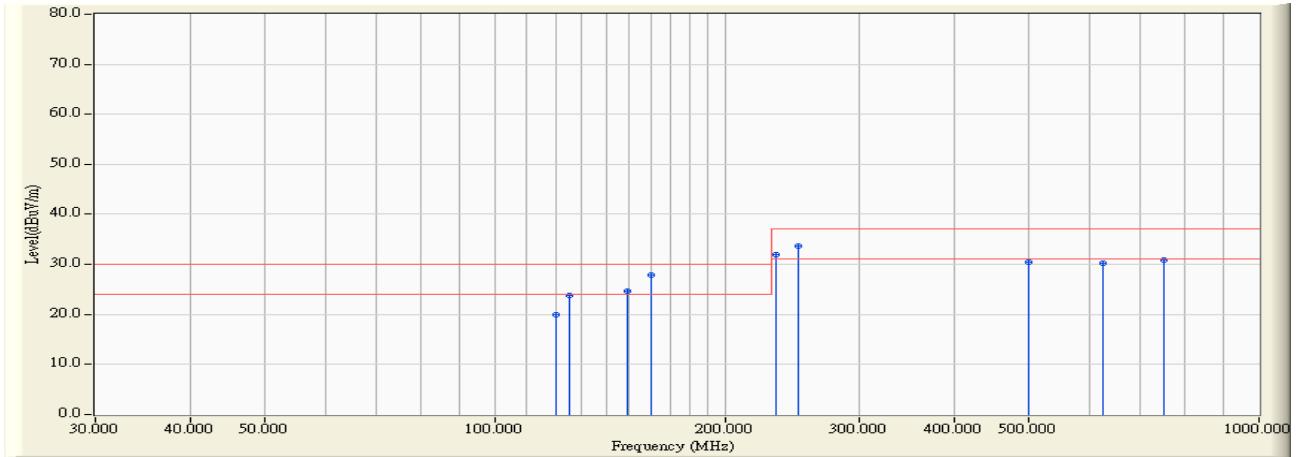


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		120.000	14.848	5.100	19.948	-10.052	30.000	QUASIPeAK
2		125.000	14.741	9.100	23.841	-6.159	30.000	QUASIPeAK
3		148.750	13.646	11.000	24.646	-5.354	30.000	QUASIPeAK
4	*	160.000	12.799	15.000	27.799	-2.201	30.000	QUASIPeAK
5		233.750	14.745	17.200	31.944	-5.056	37.000	QUASIPeAK
6		250.000	15.948	17.800	33.748	-3.252	37.000	QUASIPeAK
7		500.000	21.905	8.600	30.505	-6.495	37.000	QUASIPeAK
8		625.000	23.740	6.600	30.340	-6.660	37.000	QUASIPeAK
9		750.000	25.180	5.600	30.780	-6.220	37.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Site : OATS-2	Time : 2011/02/11 - 23:56
Limit : CISPR_B_10M_QP	Margin : 6
EUT : Network Camera	Probe : Site2_CBL6112_10M_0811 - HORIZONTAL
Power : AC 230V/50Hz	Note : Mode 3

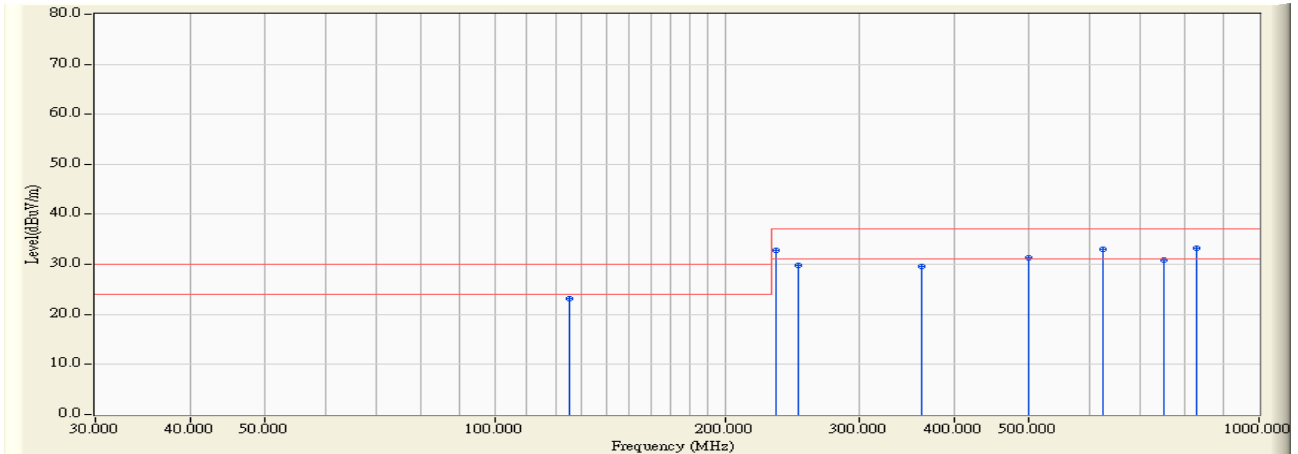


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	125.000	14.741	8.500	23.241	-6.759	30.000	QUASPEAK
2	233.750	14.745	18.100	32.844	-4.156	37.000	QUASPEAK
3	250.000	15.948	13.900	29.848	-7.152	37.000	QUASPEAK
4	361.250	18.830	10.800	29.630	-7.370	37.000	QUASPEAK
5	500.000	21.905	9.400	31.305	-5.695	37.000	QUASPEAK
6	625.000	23.740	9.200	32.940	-4.060	37.000	QUASPEAK
7	750.000	25.180	5.800	30.980	-6.020	37.000	QUASPEAK
8	* 829.200	26.248	6.900	33.148	-3.852	37.000	QUASPEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Site : OATS-2	Time : 2011/02/11 - 23:44
Limit : CISPR_B_10M_QP	Margin : 6
EUT : Network Camera	Probe : Site2_CBL6112_10M_0811 - VERTICAL
Power : AC 230V/50Hz	Note : Mode 3

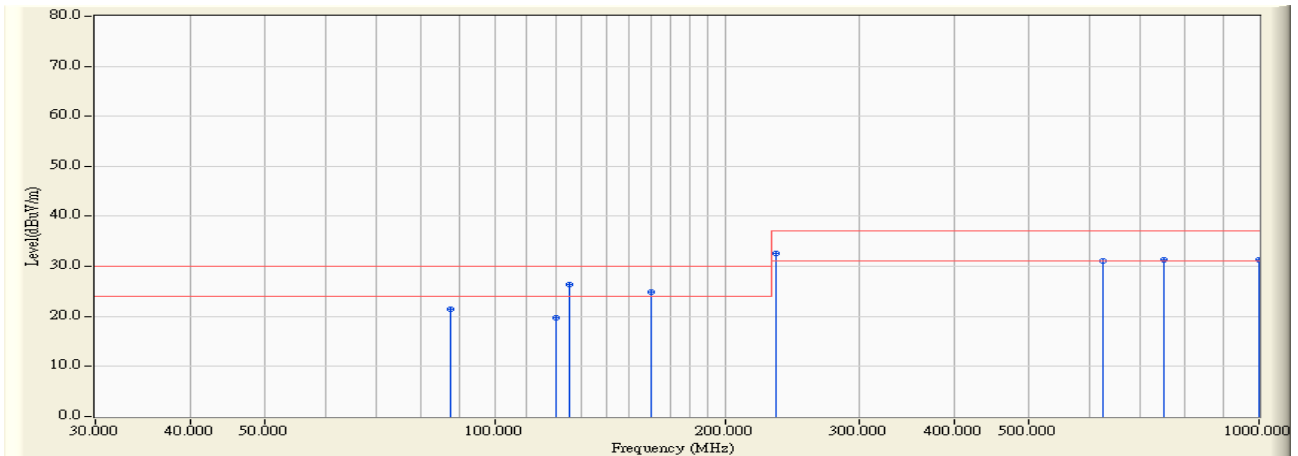


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		87.460	12.035	9.400	21.435	-8.565	30.000	QUASPEAK
2		120.000	14.848	4.900	19.748	-10.252	30.000	QUASPEAK
3	*	125.000	14.741	11.600	26.341	-3.659	30.000	QUASPEAK
4		160.000	12.799	12.000	24.799	-5.201	30.000	QUASPEAK
5		233.750	14.745	17.900	32.644	-4.356	37.000	QUASPEAK
6		625.000	23.740	7.300	31.040	-5.960	37.000	QUASPEAK
7		750.000	25.180	6.200	31.380	-5.620	37.000	QUASPEAK
8		1000.000	29.050	2.200	31.250	-5.750	37.000	QUASPEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Site: 9x6x6_Chamber	Time: 2011/02/12 - 06:17
Limit: EN55022_B_(Above_1G)	Margin: 0
Probe: 9120D_1-18G_Horn	Polarity: Horizontal
EUT: Network Camera	Power: AC 230V/50Hz
Note: Mode 1	

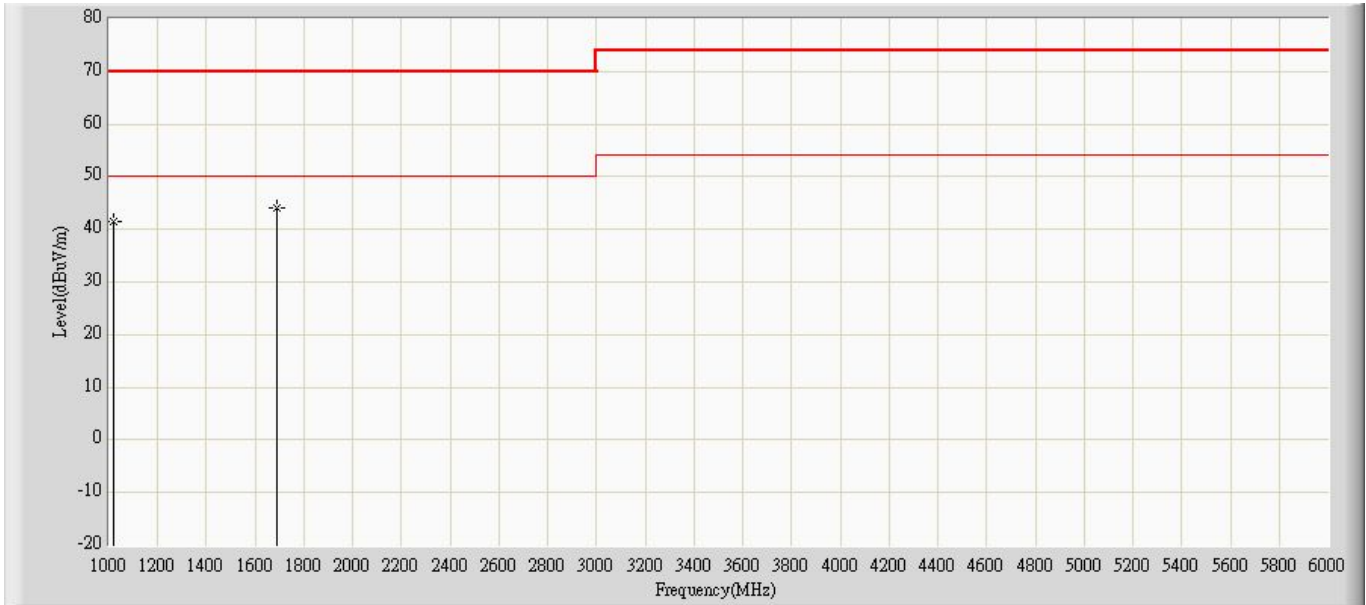


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			1020.000	41.579	48.110	-28.421	70.000	-6.531	PK
2		*	1691.000	43.997	48.230	-26.003	70.000	-4.233	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

Site: 9x6x6_Chamber	Time: 2011/02/12 - 06:17
Limit: EN55022_B_(Above_1G)	Margin: 0
Probe: 9120D_1-18G_Horn	Polarity: Vertical
EUT: Network Camera	Power: AC 230V/50Hz
Note: Mode 1	

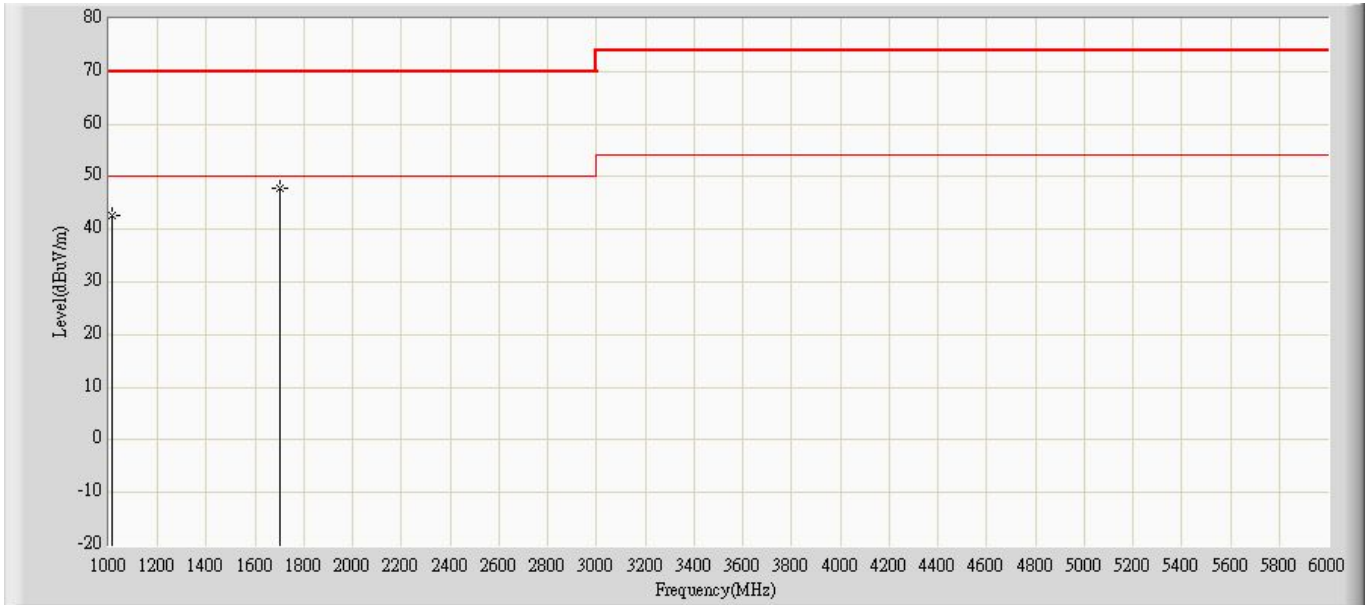


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			1010.000	42.723	49.290	-27.277	70.000	-6.566	PK
2		*	1701.000	47.918	52.140	-22.082	70.000	-4.222	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

Site: 9x6x6_Chamber	Time: 2011/02/12 - 06:26
Limit: EN55022_B_(Above_1G)	Margin: 0
Probe: 9120D_1-18G_Horn	Polarity: Horizontal
EUT: Network Camera	Power: AC 24V
Note: Mode 2	

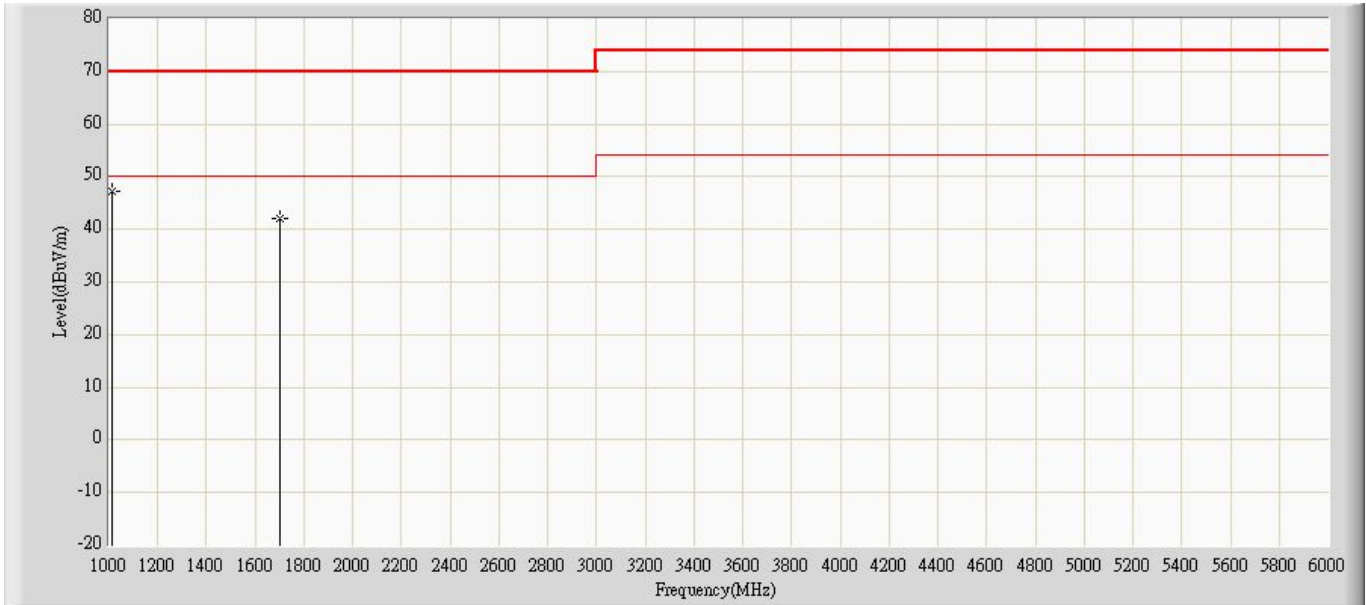


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	1010.000	47.233	53.800	-22.767	70.000	-6.566	PK
2			1701.000	42.118	46.340	-27.882	70.000	-4.222	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

Site: 9x6x6_Chamber	Time: 2011/02/12 - 06:21
Limit: EN55022_B_(Above_1G)	Margin: 0
Probe: 9120D_1-18G_Horn	Polarity: Vertical
EUT: Network Camera	Power: AC 24V
Note: Mode 2	

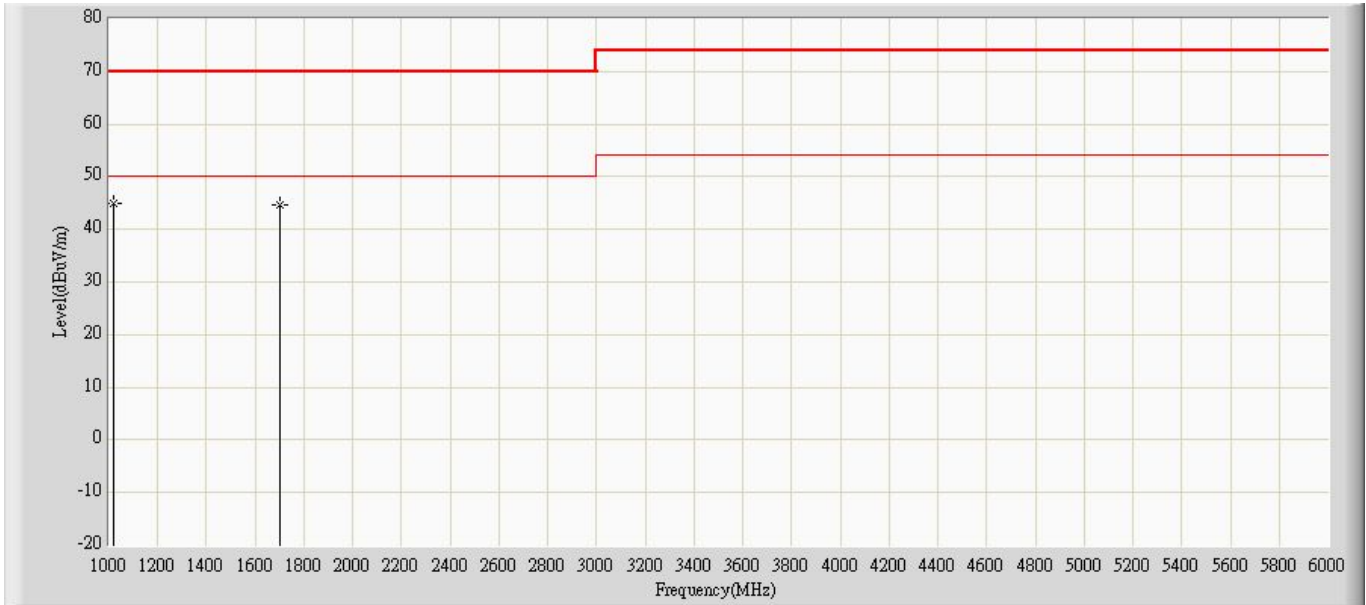


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	1020.000	44.949	51.480	-25.051	70.000	-6.531	PK
2			1701.000	44.558	48.780	-25.442	70.000	-4.222	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

Site: 9x6x6_Chamber	Time: 2011/02/12 - 05:57
Limit: EN55022_B_(Above_1G)	Margin: 0
Probe: 9120D_1-18G_Horn	Polarity: Horizontal
EUT: Network Camera	Power: AC 230V/50Hz
Note: Mode 3	

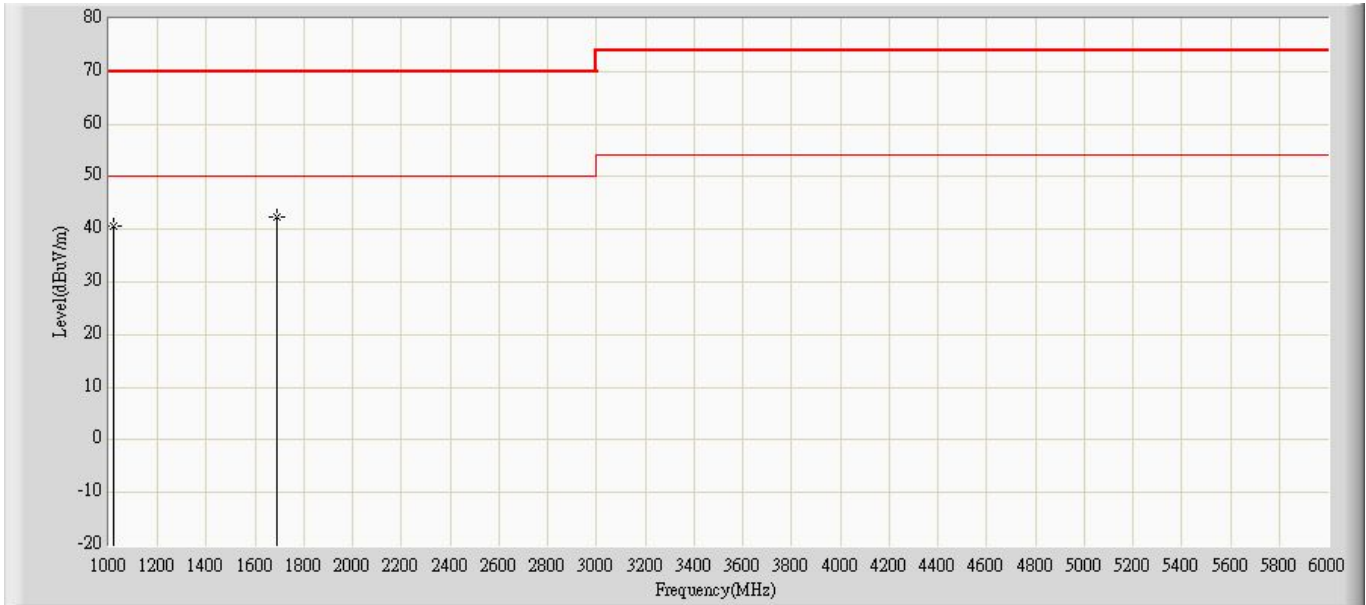


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			1020.000	40.699	47.230	-29.301	70.000	-6.531	PK
2		*	1691.000	42.247	46.480	-27.753	70.000	-4.233	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

Site: 9x6x6_Chamber	Time: 2011/02/12 - 05:54
Limit: EN55022_B_(Above_1G)	Margin: 0
Probe: 9120D_1-18G_Horn	Polarity: Vertical
EUT: Network Camera	Power: AC 230V/50Hz
Note: Mode 3	

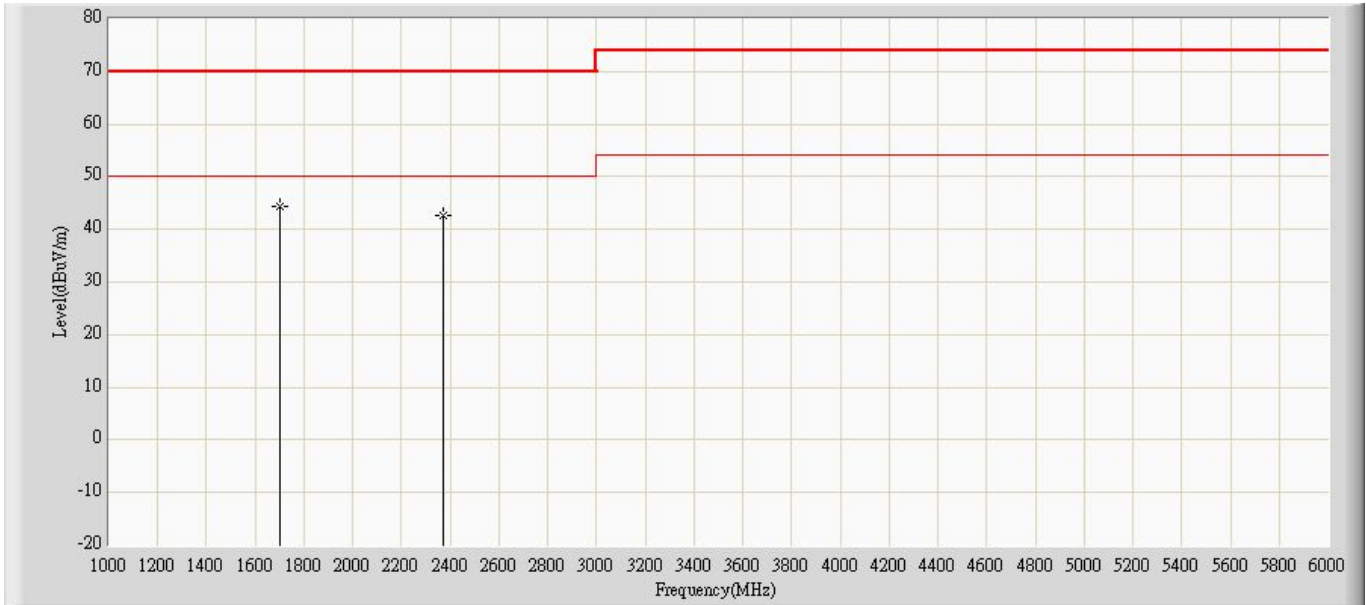

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	1701.000	44.508	48.730	-25.492	70.000	-4.222	PK
2			2372.000	42.749	44.870	-27.251	70.000	-2.122	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

5.7. Test Photograph

Test Mode : Mode 1: Adapter Mode

Description : Front View of Radiated Test



Test Mode : Mode 1: Adapter Mode

Description : Back View of Radiated Test



Test Mode : Mode 1: Adapter Mode

Description : Front View of High Frequency Radiated Test



Test Mode : Mode 2: AC 24V Mode

Description : Front View of Radiated Test




Test Mode : Mode 2: AC 24V Mode

Description : Back View of Radiated Test



Test Mode : Mode 2: AC 24V Mode

Description : Front View of High Frequency Radiated Test

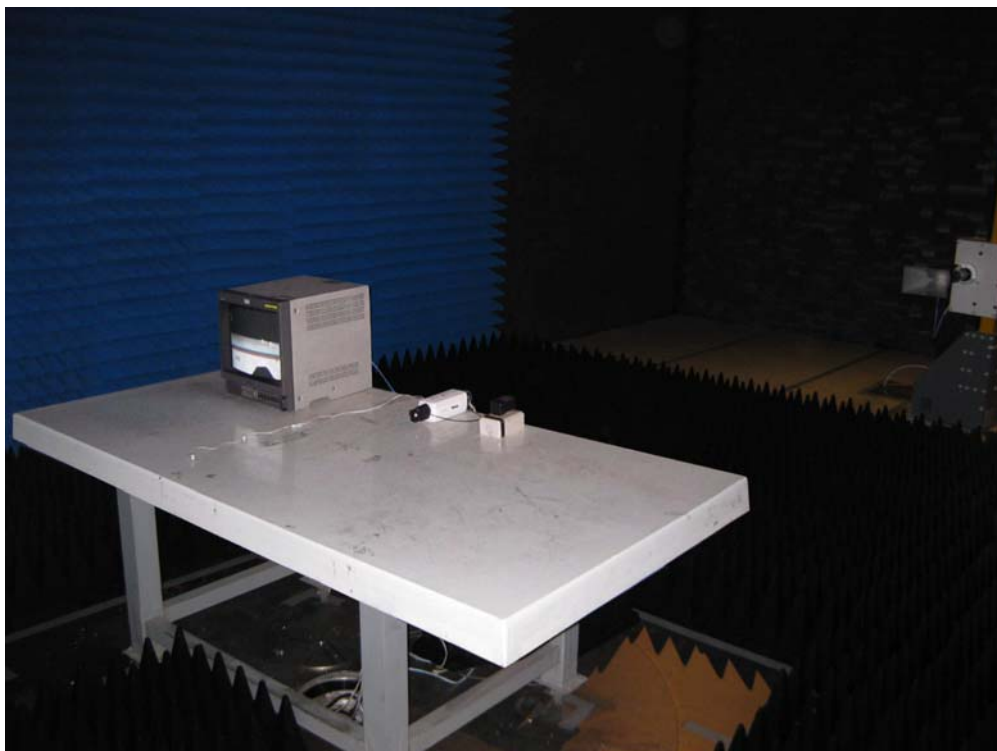

Test Mode : Mode 3: POE Mode

Description : Front View of Radiated Test



Test Mode : Mode 3: POE Mode

Description : Back View of Radiated Test



Test Mode : Mode 3: POE Mode

Description : Front View of High Frequency Radiated Test




6. Harmonic Current Emission

6.1. Test Specification

According to EMC Standard : EN 61000-3-2

6.2. Test Setup

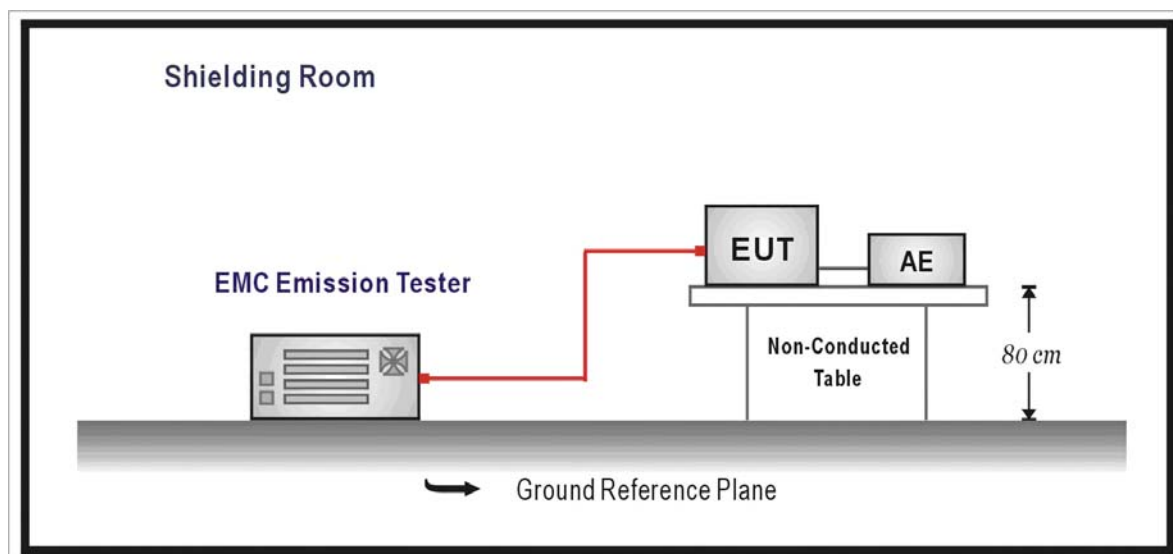

6.3. Limit

(a) Limits of Class A Harmonics Currents

Harmonics Order n	Maximum Permissible harmonic current A	Harmonics Order n	Maximum Permissible harmonic current A
Odd harmonics		Even harmonics	
3	2.30	2	1.08
5	1.14	4	0.43
7	0.77	6	0.30
9	0.40	$8 \leq n \leq 40$	$0.23 * 8/n$
11	0.33		
13	0.21		
$15 \leq n \leq 39$	$0.15 * 15/n$		

(b) Limits of Class B Harmonics Currents

For Class B equipment, the harmonic of the input current shall not exceed the maximum permissible values given in table that is the limit of Class A multiplied by a factor of 1.5.

(c) Limits of Class C Harmonics Currents

Harmonics Order n	Maximum Permissible harmonic current Expressed as a percentage of the input current at the fundamental frequency %
2	2
3	$30 \cdot \lambda^*$
5	10
7	7
9	5
$11 \leq n \leq 39$ (odd harmonics only)	3

* λ is the circuit power factor

(d) Limits of Class D Harmonics Currents

Harmonics Order n	Maximum Permissible harmonic current per watt mA/W	Maximum Permissible harmonic current A
3	3.4	2.30
5	1.9	1.14
7	1.0	0.77
9	0.5	0.40
11	0.35	0.33
$11 \leq n \leq 39$ (odd harmonics only)	$3.85/n$	See limit of Class A

6.4. Test Procedure

The EUT is supplied in series with power analyzer from a power source having the same normal voltage and frequency as the rated supply voltage and the equipment under test. And the rated voltage at the supply voltage of EUT of 0.94 times and 1.06 times shall be performed.

6.5. Deviation from Test Standard


No deviation.

6.6. Test Result

Product	Network Camera		
Test Item	Power Harmonics		
Test Mode	Mode 1: Adapter Mode		
Date of Test	2011/02/18	Test Site	No.3 Shielded Room


Test Result: Pass Source qualification: Normal

Current & voltage waveforms

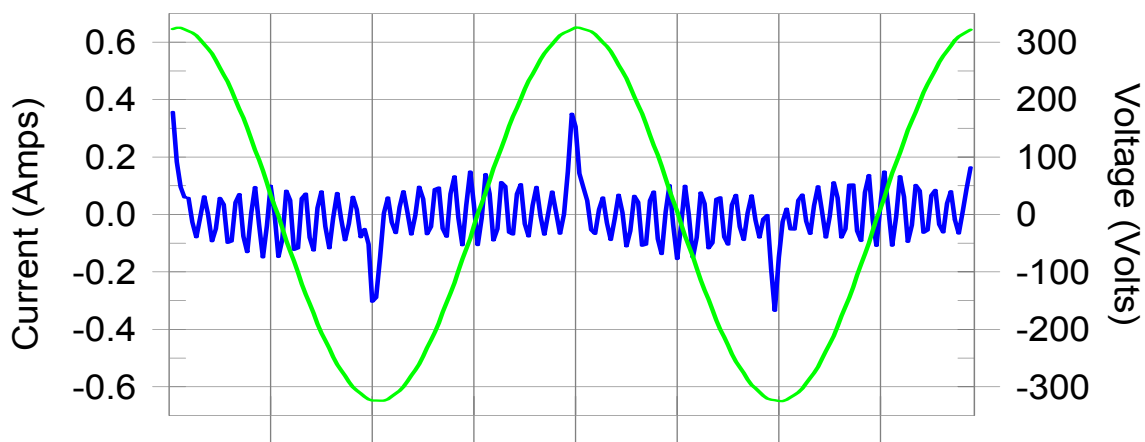

Harmonics and Class A limit line

European Limits

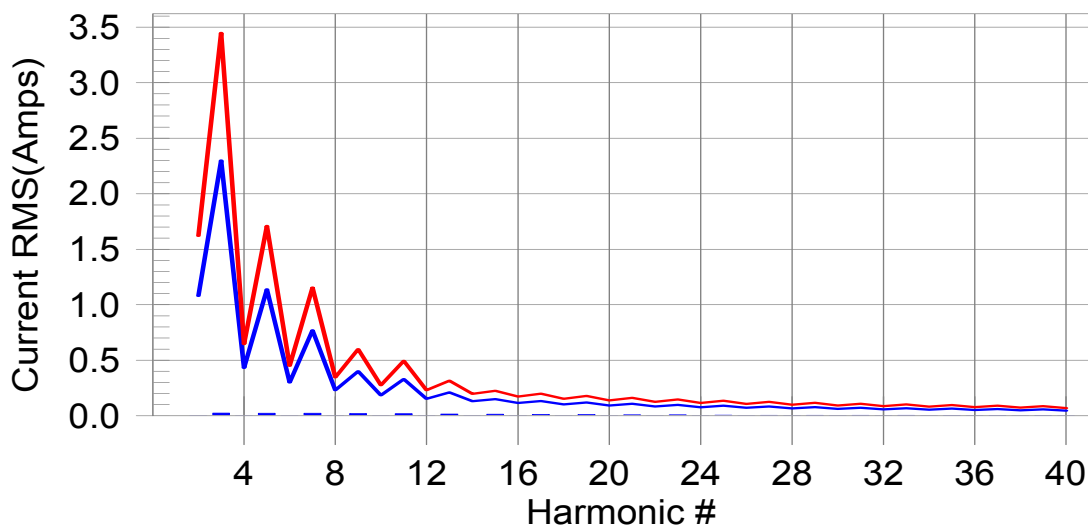

Test result: Pass Worst harmonic was #15 with 9.50% of the limit.

Test Result: Pass

Source qualification: Normal

THC(A): 0.06 I-THD(%): 191.99

POHC(A): 0.016 POHC Limit(A): 0.251

Highest parameter values during test:

V_RMS (Volts):	229.65	Frequency(Hz):	50.00
I_Peak (Amps):	0.426	I_RMS (Amps):	0.096
I_Fund (Amps):	0.030	Crest Factor:	4.441
Power (Watts):	5.7	Power Factor:	0.259

Harm#	Harms(avg)	100%Limit	%of Limit	Harms(max)	150%Limit	%of Limit	Status
2	0.001	1.080	0.1	0.001	1.620	0.06	Pass
3	0.024	2.300	1.0	0.024	3.450	0.70	Pass
4	0.001	0.430	0.2	0.001	0.645	0.15	Pass
5	0.023	1.140	2.0	0.023	1.710	1.35	Pass
6	0.001	0.300	0.3	0.001	0.450	0.27	Pass
7	0.022	0.770	2.8	0.022	1.155	1.89	Pass
8	0.001	0.230	0.4	0.001	0.345	0.29	Pass
9	0.020	0.400	5.0	0.020	0.600	3.38	Pass
10	0.001	0.184	0.5	0.001	0.276	0.37	Pass
11	0.018	0.330	5.5	0.018	0.495	3.72	Pass
12	0.001	0.153	0.6	0.001	0.230	0.46	Pass
13	0.016	0.210	7.7	0.016	0.315	5.23	Pass
14	0.001	0.131	0.7	0.001	0.197	0.50	Pass
15	0.014	0.150	9.5	0.014	0.225	6.41	Pass
16	0.001	0.115	0.7	0.001	0.173	0.56	Pass
17	0.012	0.132	9.3	0.012	0.199	6.23	Pass
18	0.001	0.102	0.8	0.001	0.153	0.64	Pass
19	0.010	0.118	8.8	0.011	0.178	5.91	Pass
20	0.001	0.092	0.8	0.001	0.138	0.62	Pass
21	0.009	0.107	8.1	0.009	0.161	5.45	Pass
22	0.001	0.084	0.8	0.001	0.125	0.67	Pass
23	0.007	0.098	7.3	0.007	0.147	4.98	Pass
24	0.001	0.077	0.8	0.001	0.115	0.65	Pass
25	0.006	0.090	6.6	0.006	0.135	4.47	Pass
26	0.001	0.071	0.8	0.001	0.106	0.66	Pass
27	0.005	0.083	6.0	0.005	0.125	4.07	Pass
28	0.001	0.066	0.8	0.001	0.099	0.63	Pass
29	0.004	0.078	5.5	0.004	0.116	3.75	Pass
30	0.000	0.061	0.8	0.001	0.092	0.67	Pass
31	0.004	0.073	5.1	0.004	0.109	3.48	Pass
32	0.000	0.058	0.7	0.001	0.086	0.63	Pass
33	0.003	0.068	4.8	0.003	0.102	3.30	Pass
34	0.000	0.054	0.7	0.001	0.081	0.63	Pass
35	0.003	0.064	4.6	0.003	0.096	3.18	Pass
36	0.000	0.051	0.7	0.000	0.077	0.60	Pass
37	0.003	0.061	4.4	0.003	0.091	3.04	Pass
38	0.000	0.048	0.7	0.000	0.073	0.63	Pass
39	0.002	0.058	4.2	0.003	0.087	2.89	Pass
40	0.000	0.046	0.7	0.000	0.069	0.65	Pass

1.Dynamic limits were applied for this test. The highest harmonics values in the above table may not occur at the same window as the maximum harmonics/limit ratio.

2:According to EN61000-3-2 paragraph 7 the note 1 and 2 are valid for all applications having an active input power >75W. Others the result should be pass.

6.7. Test Photograph

Test Mode : Mode 1: Adapter Mode

Description : Power Harmonics Test Setup




7. Voltage Fluctuation and Flicker

7.1. Test Specification

According to EMC Standard : EN 61000-3-3

7.2. Test Setup

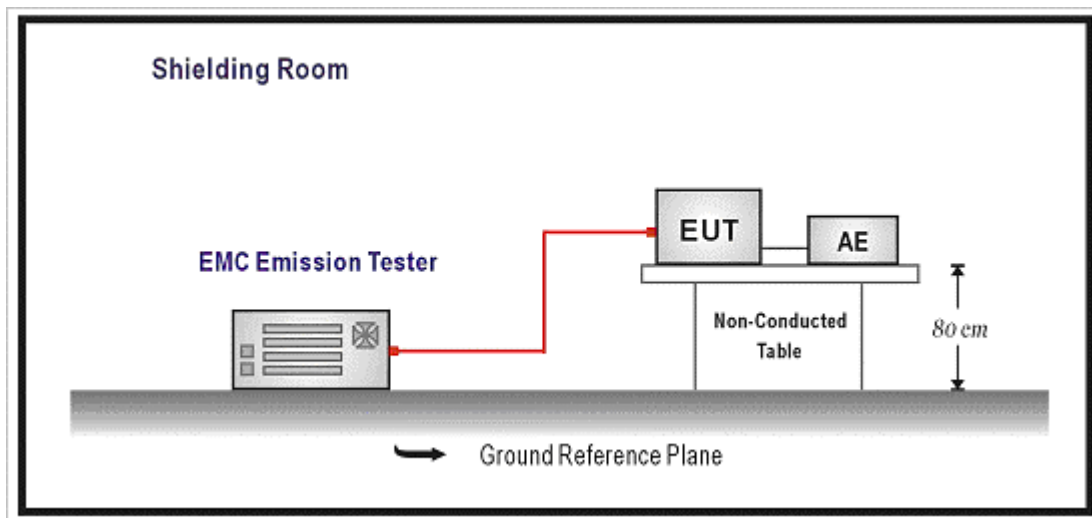

7.3. Limit

The following limits apply:

- the value of P_{st} shall not be greater than 1.0;
 - the value of P_{1t} shall not be greater than 0.65;
 - the value of $d(t)$ during a voltage change shall not exceed 3.3 % for more than 500 ms;
 - the relative steady-state voltage change, d_c , shall not exceed 3.3 %;
 - the maximum relative voltage change, d_{max} , shall not exceed;
- a) 4 % without additional conditions;
 - b) 6 % for equipment which is:
 - switched manually, or
 - switched automatically more frequently than twice per day, and also has either a delayed restart (the delay being not less than a few tens of seconds), or manual restart, after a power supply interruption.

NOTE The cycling frequency will be further limited by the P_{st} and P_{1t} limit.

For example: a d_{max} of 6% producing a rectangular voltage change characteristic twice per hour will give a P_{1t} of about 0.65.

- c) 7 % for equipment which is:
- attended whilst in use (for example: hair dryers, vacuum cleaners, kitchen equipment such as mixers, garden equipment such as lawn mowers, portable tools such as electric drills), or
 - switched on automatically, or is intended to be switched on manually, no more than twice per day, and also has either a delayed restart (the delay being not less than a few tens of seconds) or manual restart, after a power supply interruption.

P_{st} and P_{1t} requirements shall not be applied to voltage changes caused by manual switching.

7.4. Test Procedure

The EUT is supplied in series with power analyzer from a power source having the same normal voltage and frequency as the rated supply voltage and the equipment under test. And the rated voltage at the supply voltage of EUT of 0.94 times and 1.06 times shall be performed.

7.5. Deviation from Test Standard

No deviation.

7.6. Test Result


Product	Network Camera		
Test Item	Voltage Fluctuation and Flicker		
Test Mode	Mode 1: Adapter Mode		
Date of Test	2011/02/18	Test Site	No.3 Shielded Room

Test Result: Pass


Status: Test Completed

Pstj and limit line

European Limits

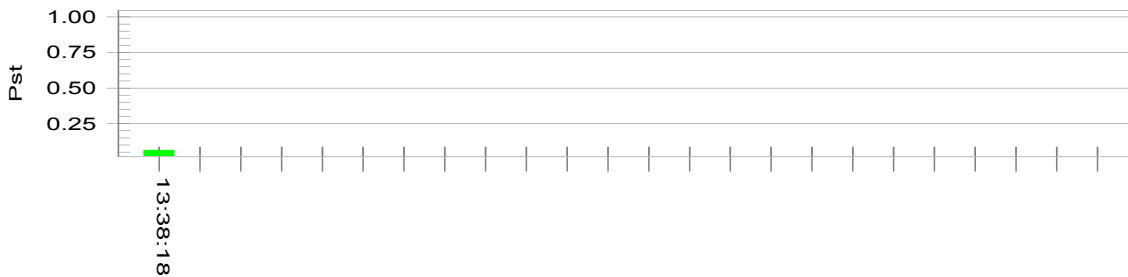

Plt and limit line

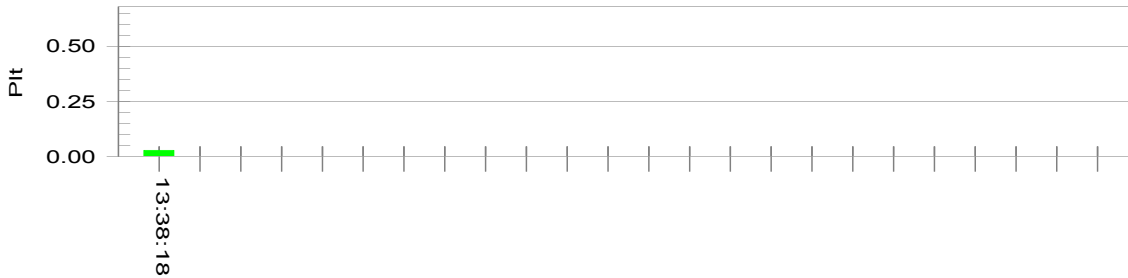

Parameter values recorded during the test:

Vrms at the end of test (Volt):	229.56			
Highest dt (%):	0.00	Test limit (%):	3.30	Pass
Time(mS) > dt:	0.0	Test limit (mS):	500.0	Pass
Highest dc (%):	0.00	Test limit (%):	3.30	Pass
Highest dmax (%):	0.00	Test limit (%):	4.00	Pass
Highest Pst (10 min. period):	0.064	Test limit:	1.000	Pass
Highest Plt (2 hr. period):	0.028	Test limit:	0.650	Pass

7.7. Test Photograph

Test Mode : Mode 1: Adapter Mode

Description : Flicker Test Setup




8. Electrostatic Discharge

8.1. Test Specification

According to Standard : IEC 61000-4-2

8.2. Test Setup

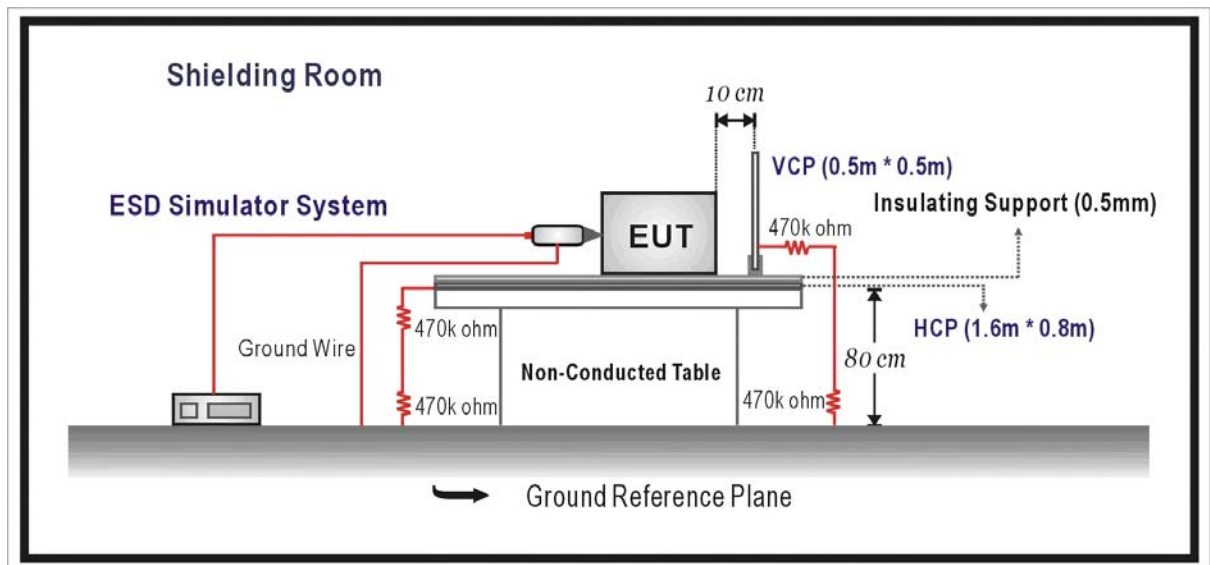

8.3. Limit

Item	Environmental Phenomena	Units	Test Specification	Performance Criteria
Enclosure Port				
	Electrostatic Discharge	kV(Charge Voltage)	±8 Air Discharge ±4 Contact Discharge	B

8.4. Test Procedure

Direct application of discharges to the EUT:

Contact discharge was applied only to conductive surfaces of the EUT.

Air discharges were applied only to non-conductive surfaces of the EUT.

During the test, it was performed with single discharges. For the single discharge time between successive single discharges will be keep longer 1 second. It was at least ten single discharges with positive and negative at the same selected point.

The selected point, which was performed with electrostatic discharge, was marked on the red label of the EUT.

Indirect application of discharges to the EUT:

Vertical Coupling Plane (VCP):

The coupling plane, of dimensions 0.5m x 0.5m, is placed parallel to, and positioned at a distance 0.1m from, the EUT, with the Discharge Electrode touching the coupling plane.

The four faces of the EUT will be performed with electrostatic discharge. It was at least ten single discharges with positive and negative at the same selected point.

Horizontal Coupling Plane (HCP):

The coupling plane is placed under to the EUT. The generator shall be positioned vertically at a distance of 0.1m from the EUT, with the Discharge Electrode touching the coupling plane.

The four faces of the EUT will be performed with electrostatic discharge. It was at least ten single discharges with positive and negative at the same selected point.

8.5. Deviation from Test Standard

No deviation.

8.6. Test Result

Product	Network Camera		
Test Item	Electrostatic Discharge		
Test Mode	Mode 1: Adapter Mode		
Date of Test	2011/02/22	Test Site	No.6 Shielded Room

Item	Amount of Discharge	Voltage	Required Criteria	Complied To Criteria (A,B,C)	Results
Air Discharge	10	+8kV	B	A	Pass
	10	-8kV	B	A	Pass
Contact Discharge	25	+4kV	B	A	Pass
	25	-4kV	B	A	Pass
Indirect Discharge (HCP)	25	+4kV	B	A	Pass
	25	-4kV	B	A	Pass
Indirect Discharge (VCP Front)	25	+4kV	B	A	Pass
	25	-4kV	B	A	Pass
Indirect Discharge (VCP Left)	25	+4kV	B	A	Pass
	25	-4kV	B	A	Pass
Indirect Discharge (VCP Back)	25	+4kV	B	A	Pass
	25	-4kV	B	A	Pass
Indirect Discharge (VCP Right)	25	+4kV	B	A	Pass
	25	-4kV	B	A	Pass

Note:

The testing performed is from lowest level up to the highest level as required by standard, but only highest level is shown on the report.

NR: No Requirement

- Meet criteria A: Operate as intended during and after the test
- Meet criteria B: Operate as intended after the test
- Meet criteria C: Loss/Error of function
- Additional Information
 - EUT stopped operation and could / could not be reset by operator at ____ kV.
 - No false alarms or other malfunctions were observed during or after the test.

Remark:

The Contact discharges were applied at least total 200 discharges at a minimum of four test points.

Product	Network Camera		
Test Item	Electrostatic Discharge		
Test Mode	Mode 2: AC 24V Mode		
Date of Test	2011/02/22	Test Site	No.6 Shielded Room

Item	Amount of Discharge	Voltage	Required Criteria	Complied To Criteria (A,B,C)	Results
Air Discharge	10	+8kV	B	A	Pass
	10	-8kV	B	A	Pass
Contact Discharge	25	+4kV	B	A	Pass
	25	-4kV	B	A	Pass
Indirect Discharge (HCP)	25	+4kV	B	A	Pass
	25	-4kV	B	A	Pass
Indirect Discharge (VCP Front)	25	+4kV	B	A	Pass
	25	-4kV	B	A	Pass
Indirect Discharge (VCP Left)	25	+4kV	B	A	Pass
	25	-4kV	B	A	Pass
Indirect Discharge (VCP Back)	25	+4kV	B	A	Pass
	25	-4kV	B	A	Pass
Indirect Discharge (VCP Right)	25	+4kV	B	A	Pass
	25	-4kV	B	A	Pass

Note:

The testing performed is from lowest level up to the highest level as required by standard, but only highest level is shown on the report.

NR: No Requirement

- Meet criteria A: Operate as intended during and after the test
- Meet criteria B: Operate as intended after the test
- Meet criteria C: Loss/Error of function
- Additional Information
 - EUT stopped operation and could / could not be reset by operator at ____ kV.
 - No false alarms or other malfunctions were observed during or after the test.

Remark:

The Contact discharges were applied at least total 200 discharges at a minimum of four test points.

Product	Network Camera		
Test Item	Electrostatic Discharge		
Test Mode	Mode 3: POE Mode		
Date of Test	2011/02/22	Test Site	No.6 Shielded Room

Item	Amount of Discharge	Voltage	Required Criteria	Complied To Criteria (A,B,C)	Results
Air Discharge	10	+8kV	B	A	Pass
	10	-8kV	B	A	Pass
Contact Discharge	25	+4kV	B	A	Pass
	25	-4kV	B	A	Pass
Indirect Discharge (HCP)	25	+4kV	B	A	Pass
	25	-4kV	B	A	Pass
Indirect Discharge (VCP Front)	25	+4kV	B	A	Pass
	25	-4kV	B	A	Pass
Indirect Discharge (VCP Left)	25	+4kV	B	A	Pass
	25	-4kV	B	A	Pass
Indirect Discharge (VCP Back)	25	+4kV	B	A	Pass
	25	-4kV	B	A	Pass
Indirect Discharge (VCP Right)	25	+4kV	B	A	Pass
	25	-4kV	B	A	Pass

Note:

The testing performed is from lowest level up to the highest level as required by standard, but only highest level is shown on the report.

NR: No Requirement

- Meet criteria A: Operate as intended during and after the test
- Meet criteria B: Operate as intended after the test
- Meet criteria C: Loss/Error of function
- Additional Information
 - EUT stopped operation and could / could not be reset by operator at ____ kV.
 - No false alarms or other malfunctions were observed during or after the test.

Remark:

The Contact discharges were applied at least total 200 discharges at a minimum of four test points.

8.7. Test Photograph

Test Mode : Mode 1: Adapter Mode

Description : ESD Test Setup



Test Mode : Mode 2: AC 24V Mode

Description : ESD Test Setup



Test Mode : Mode 3: POE Mode

Description : ESD Test Setup




9. Radiated Susceptibility

9.1. Test Specification

According to Standard : IEC 61000-4-3

9.2. Test Setup

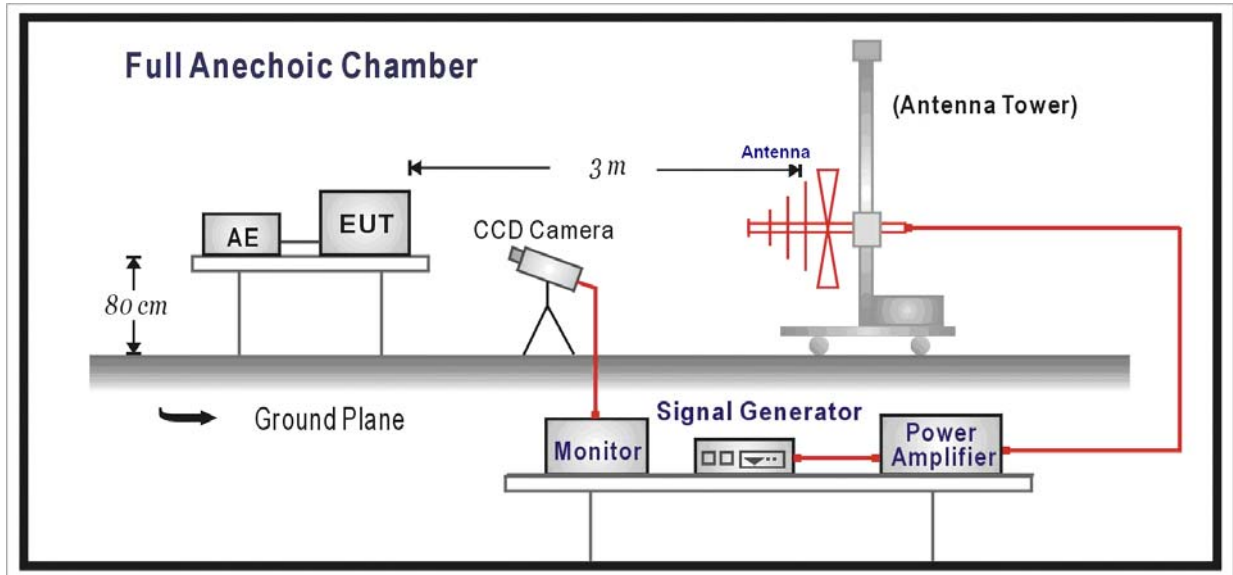

9.3. Limit

Item	Environmental Phenomena	Units	Test Specification	Performance Criteria
Enclosure Port				
	Radio-Frequency Electromagnetic Field Amplitude Modulated	MHz V/m(Un-modulated, rms) % AM (1kHz)	80-1000 3 80	A

9.4. Test Procedure

The EUT and load, which are placed on a table that is 0.8 meter above ground, are placed with one coincident with the calibration plane such that the distance from antenna to the EUT was 3 meters.

Both horizontal and vertical polarization of the antenna and four sides of the EUT are set on measurement.

In order to judge the EUT performance, a CCD camera is used to monitor EUT screen.

All the scanning conditions are as follows:

Condition of Test	Remarks
1. Field Strength	3 V/m Level 2
2. Radiated Signal	AM 80% Modulated with 1kHz
3. Scanning Frequency	80MHz - 1000MHz
4. Dwell Time	3 Seconds
5. Frequency step size Δf :	1%
6. The rate of Swept of Frequency	1.5×10^{-3} decades/s

9.5. Deviation from Test Standard

No deviation.

9.6. Test Result

Product	Network Camera		
Test Item	Radiated susceptibility		
Test Mode	Mode 1: Adapter Mode		
Date of Test	2011/02/22	Test Site	Chamber5

Frequency (MHz)	Position (Angle)	Polarity (H or V)	Field Strength (V/m)	Required Criteria	Complied To Criteria (A,B,C)	Results
80-1000	FRONT	H	3	A	A	PASS
80-1000	FRONT	V	3	A	A	PASS
80-1000	BACK	H	3	A	A	PASS
80-1000	BACK	V	3	A	A	PASS
80-1000	RIGHT	H	3	A	A	PASS
80-1000	RIGHT	V	3	A	A	PASS
80-1000	LEFT	H	3	A	A	PASS
80-1000	LEFT	V	3	A	A	PASS
80-1000	UP	H	3	A	A	PASS
80-1000	UP	V	3	A	A	PASS
80-1000	DOWN	H	3	A	A	PASS
80-1000	DOWN	V	3	A	A	PASS

Note:

The testing performed is from lowest level up to the highest level as required by standard, but only highest level is shown on the report.

- Meet criteria A: Operate as intended during and after the test
- Meet criteria B: Operate as intended after the test
- Meet criteria C: Loss/Error of function
- Additional Information
 - There was no observable degradation in performance.
 - EUT stopped operation and could / could not be reset by operator at _____ V/m at frequency _____ MHz.
- No false alarms or other malfunctions were observed during or after the test.

Product	Network Camera		
Test Item	Radiated susceptibility		
Test Mode	Mode 2: AC 24V Mode		
Date of Test	2011/02/22	Test Site	Chamber5

Frequency (MHz)	Position (Angle)	Polarity (H or V)	Field Strength (V/m)	Required Criteria	Complied To Criteria (A,B,C)	Results
80-1000	FRONT	H	3	A	A	PASS
80-1000	FRONT	V	3	A	A	PASS
80-1000	BACK	H	3	A	A	PASS
80-1000	BACK	V	3	A	A	PASS
80-1000	RIGHT	H	3	A	A	PASS
80-1000	RIGHT	V	3	A	A	PASS
80-1000	LEFT	H	3	A	A	PASS
80-1000	LEFT	V	3	A	A	PASS
80-1000	UP	H	3	A	A	PASS
80-1000	UP	V	3	A	A	PASS
80-1000	DOWN	H	3	A	A	PASS
80-1000	DOWN	V	3	A	A	PASS

Note:

The testing performed is from lowest level up to the highest level as required by standard, but only highest level is shown on the report.

- Meet criteria A: Operate as intended during and after the test
- Meet criteria B: Operate as intended after the test
- Meet criteria C: Loss/Error of function
- Additional Information
 - There was no observable degradation in performance.
 - EUT stopped operation and could / could not be reset by operator at _____ V/m at frequency _____ MHz.
- No false alarms or other malfunctions were observed during or after the test.

Product	Network Camera		
Test Item	Radiated susceptibility		
Test Mode	Mode 3: POE Mode		
Date of Test	2011/02/22	Test Site	Chamber5

Frequency (MHz)	Position (Angle)	Polarity (H or V)	Field Strength (V/m)	Required Criteria	Complied To Criteria (A,B,C)	Results
80-1000	FRONT	H	3	A	A	PASS
80-1000	FRONT	V	3	A	A	PASS
80-1000	BACK	H	3	A	A	PASS
80-1000	BACK	V	3	A	A	PASS
80-1000	RIGHT	H	3	A	A	PASS
80-1000	RIGHT	V	3	A	A	PASS
80-1000	LEFT	H	3	A	A	PASS
80-1000	LEFT	V	3	A	A	PASS
80-1000	UP	H	3	A	A	PASS
80-1000	UP	V	3	A	A	PASS
80-1000	DOWN	H	3	A	A	PASS
80-1000	DOWN	V	3	A	A	PASS

Note:

The testing performed is from lowest level up to the highest level as required by standard, but only highest level is shown on the report.

- Meet criteria A: Operate as intended during and after the test
- Meet criteria B: Operate as intended after the test
- Meet criteria C: Loss/Error of function
- Additional Information
 - There was no observable degradation in performance.
 - EUT stopped operation and could / could not be reset by operator at _____ V/m at frequency _____ MHz.
- No false alarms or other malfunctions were observed during or after the test.

9.7. Test Photograph


Test Mode : Mode 1: Adapter Mode

Description : Radiated Susceptibility Test Setup



Test Mode : Mode 2: AC 24V Mode

Description : Radiated Susceptibility Test Setup

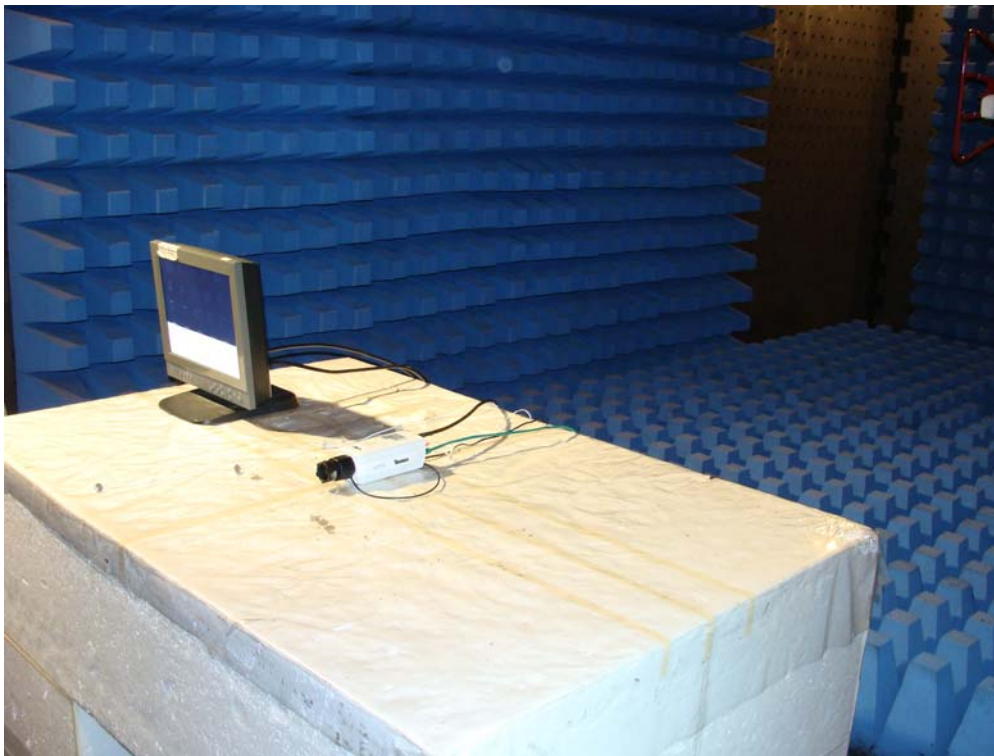

Test Mode : Mode 3: POE Mode

Description : Radiated Susceptibility Test Setup




10. Electrical Fast Transient/Burst

10.1. Test Specification

According to Standard : IEC 61000-4-4

10.2. Test Setup

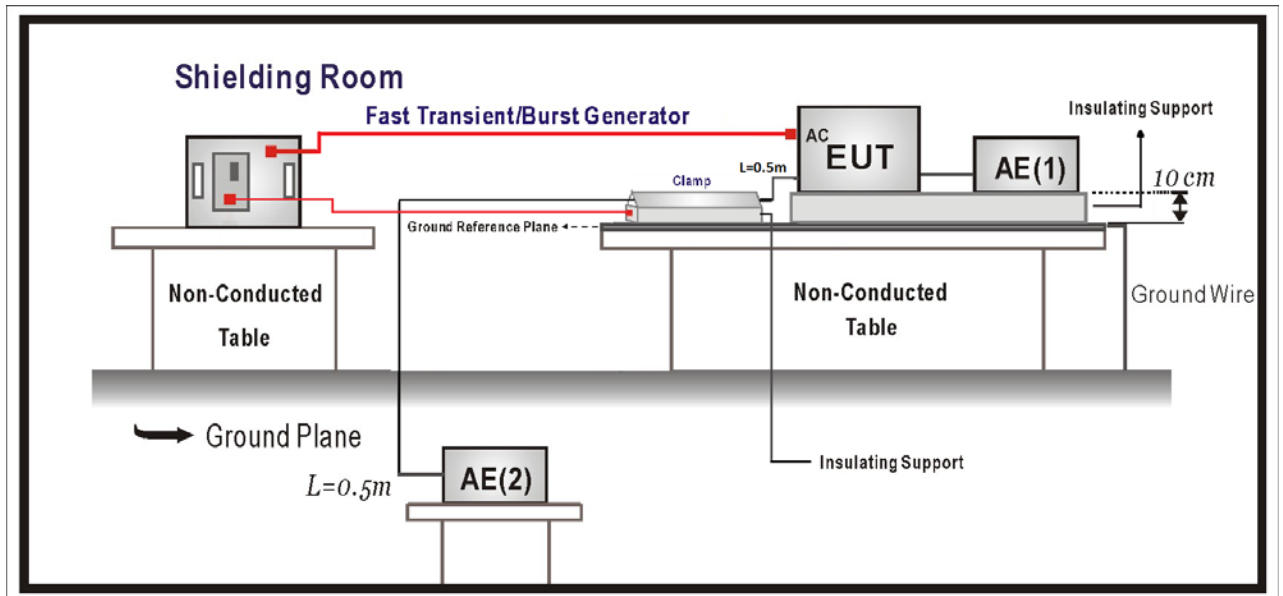

10.3. Limit

Item	Environmental Phenomena	Units	Test Specification	Performance Criteria
I/O and communication ports				
	Fast Transients Common Mode	kV (Peak) Tr/Th ns Rep. Frequency kHz	± 0.5 5/50 5	B
Input DC Power Ports				
	Fast Transients Common Mode	kV (Peak) Tr/Th ns Rep. Frequency kHz	± 0.5 5/50 5	B
Input AC Power Ports				
	Fast Transients Common Mode	kV (Peak) Tr/Th ns Rep. Frequency kHz	± 1 5/50 5	B

10.4. Test Procedure

The EUT is placed on a table that is 0.8 meter height. A ground reference plane is placed on the table, and uses a 0.1m insulation between the EUT and ground reference plane.

The minimum area of the ground reference plane is 1m*1m, and 0.65mm thick min, and projected beyond the EUT by at least 0.1m on all sides.

Test on I/O and communication ports:

The EFT interference signal is through a coupling clamp device couples to the signal and control lines of the EUT with burst noise for 1 minute.

Test on power supply ports:

The EUT is connected to the power mains through a coupling device that directly couples the EFT/B interference signal.

Each of the Line and Neutral conductors is impressed with burst noise for 1 minute.

The length of the signal and power lines between the coupling device and the EUT is 0.5m.

10.5. Deviation from Test Standard

No deviation.

10.6. Test Result

Product	Network Camera		
Test Item	Electrical fast transient/burst		
Test Mode	Mode 1: Adapter Mode		
Date of Test	2011/02/18	Test Site	No.3 Shielded Room

Inject Line	Polarity	Voltage kV	Inject Time (Second)	Inject Method	Required Criteria	Complied to Criteria	Result
L-N	±	1kV	60	Direct	B	B	PASS
LAN	±	0.5 kV	60	Clamp	B	B	PASS
Coaxial	±	0.5 kV	60	Clamp	B	B	PASS

Note:

The testing performed is from lowest level up to the highest level as required by standard, but only highest level is shown on the report.

- Meet criteria A : Operate as intended during and after the test
- Meet criteria B : Operate as intended after the test
- Meet criteria C : Loss/Error of function
- Additional Information
 - EUT stopped operation and could / could not be reset by operator at _____ kV of Line _____.
- No false alarms or other malfunctions were observed during or after the test.

Product	Network Camera		
Test Item	Electrical fast transient/burst		
Test Mode	Mode 2: AC 24V Mode		
Date of Test	2011/02/18	Test Site	No.3 Shielded Room

Inject Line	Polarity	Voltage kV	Inject Time (Second)	Inject Method	Required Criteria	Complied to Criteria	Result
L-N	±	1kV	60	Direct	B	B	PASS
LAN	±	0.5 kV	60	Clamp	B	B	PASS
Coaxial	±	0.5 kV	60	Clamp	B	B	PASS

Note:

The testing performed is from lowest level up to the highest level as required by standard, but only highest level is shown on the report.

- Meet criteria A : Operate as intended during and after the test
- Meet criteria B : Operate as intended after the test
- Meet criteria C : Loss/Error of function
- Additional Information
 - EUT stopped operation and could / could not be reset by operator at _____ kV of Line _____.
- No false alarms or other malfunctions were observed during or after the test.

Product	Network Camera		
Test Item	Electrical fast transient/burst		
Test Mode	Mode 3: POE Mode		
Date of Test	2011/02/18	Test Site	No.3 Shielded Room

Inject Line	Polarity	Voltage kV	Inject Time (Second)	Inject Method	Required Criteria	Complied to Criteria	Result
LAN	±	0.5 kV	60	Clamp	B	B	PASS
Coaxial	±	0.5 kV	60	Clamp	B	B	PASS

Note:

The testing performed is from lowest level up to the highest level as required by standard, but only highest level is shown on the report.

- Meet criteria A : Operate as intended during and after the test
- Meet criteria B : Operate as intended after the test
- Meet criteria C : Loss/Error of function
- Additional Information
 - EUT stopped operation and could / could not be reset by operator at _____ kV of Line _____.
- No false alarms or other malfunctions were observed during or after the test.

10.7. Test Photograph


Test Mode : Mode 1: Adapter Mode

Description : EFT/B Test Setup



Test Mode : Mode 1: Adapter Mode

Description : EFT/B Test Setup - Clamp

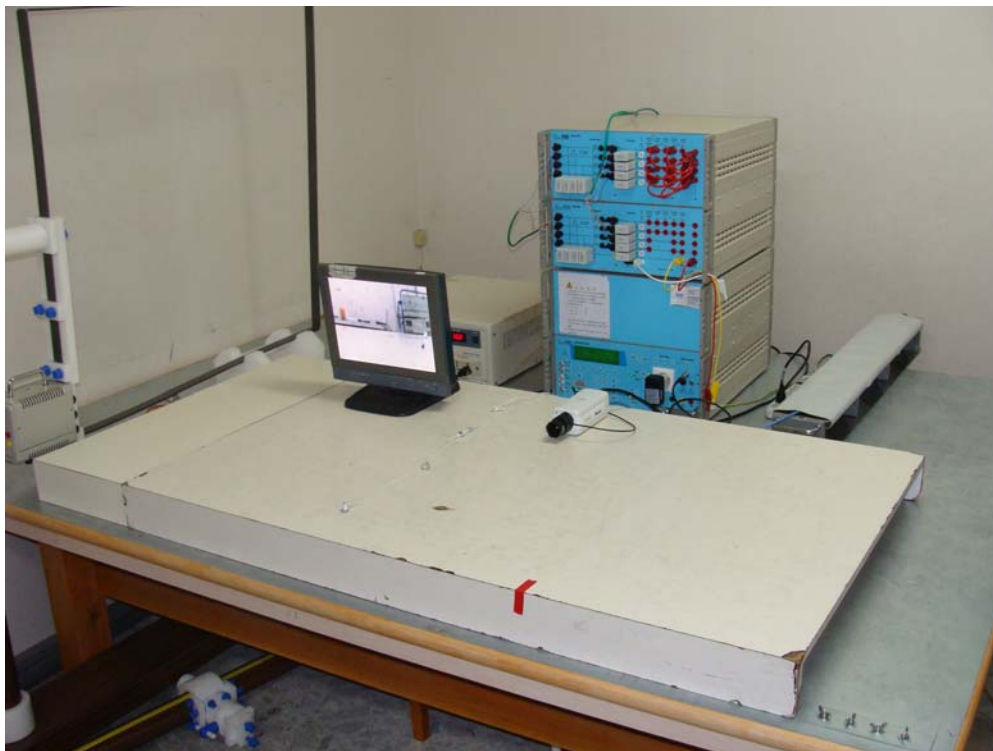

Test Mode : Mode 2: AC 24V Mode

Description : EFT/B Test Setup



Test Mode : Mode 2: AC 24V Mode

Description : EFT/B Test Setup - Clamp



Test Mode : Mode 3: POE Mode

Description : EFT/B Test Setup - Clamp




11. Surge

11.1. Test Specification

According to Standard : IEC 61000-4-5

11.2. Test Setup

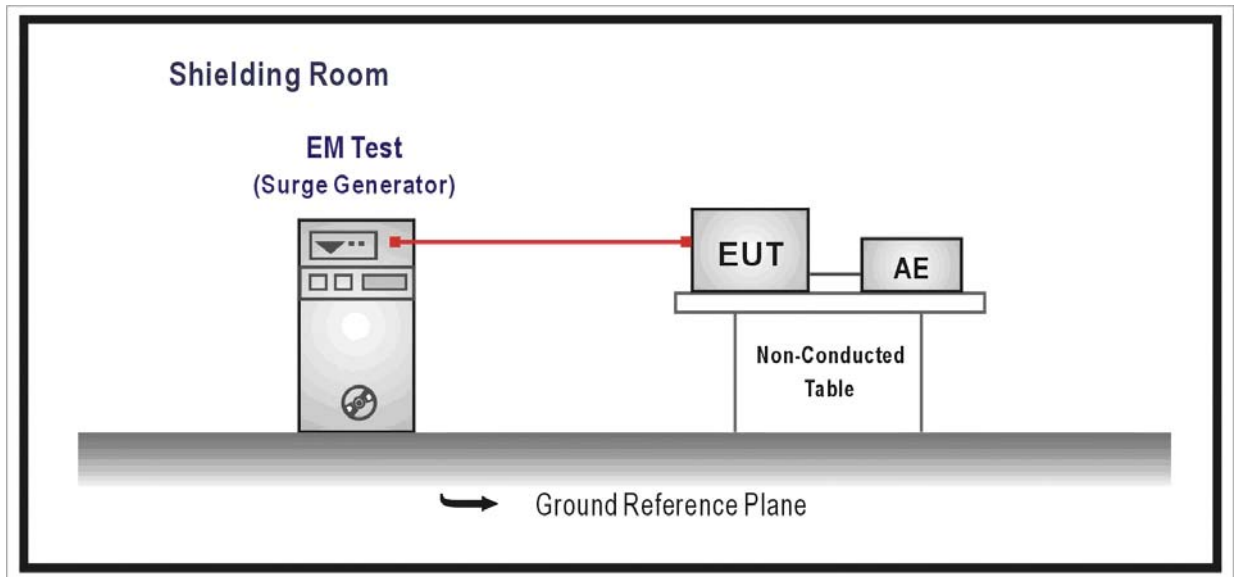

11.3. Limit

Item	Environmental Phenomena	Units	Test Specification	Performance Criteria
Signal Ports and Telecommunication Ports(See 1) and 2))				
	Surges Line to Ground	Tr/Th us kV	1.2/50 (8/20) ± 1	B
Input DC Power Ports				
	Surges Line to Ground	Tr/Th us kV	1.2/50 (8/20) ± 0.5	B
AC Input and AC Output Power Ports				
	Surges Line to Line Line to Ground	Tr/Th us kV kV	1.2/50 (8/20) ± 1 ± 2	B

Notes:

- 1) Applicable only to ports which according to the manufacturer’s may directly to outdoor cables.
- 2) Where normal functioning cannot be achieved because of the impact of the CDN on the EUT, no immunity test shall be required.

11.4. Test Procedure

The EUT and its load are placed on a table that is 0.8 meter above a metal ground plane measured 1m*1m min. and 0.65mm thick min. And projected beyond the EUT by at least 0.1m on all sides. The length of power cord between the coupling device and the EUT shall be 2m or less.

For Input and Output AC Power or DC Input and DC Output Power Ports:

The EUT is connected to the power mains through a coupling device that directly couples the Surge interference signal.

The surge noise shall be applied synchronized to the voltage phase at 0⁰, 90⁰, 180⁰, 270⁰ and the peak value of the a.c. voltage wave. (Positive and negative)

Each of Line-Earth and Line-Line is impressed with a sequence of five surge voltages with interval of 1 min.

11.5. Deviation from Test Standard

No deviation.

11.6. Test Result

Product	Network Camera		
Test Item	Surge		
Test Mode	Mode 1: Adapter Mode		
Date of Test	2011/02/18	Test Site	No.3 Shielded Room

Inject Line	Polarity	Angle	Voltage kV	Time Interval (Second)	Inject Method	Required Criteria	Complied to Criteria	Result
L-N	±	0	1kV	60	Direct	B	A	PASS
L-N	±	90	1kV	60	Direct	B	A	PASS
L-N	±	180	1kV	60	Direct	B	A	PASS
L-N	±	270	1kV	60	Direct	B	A	PASS

Note:

The testing performed is from lowest level up to the highest level as required by standard, but only highest level is shown on the report.

- Meet criteria A : Operate as intended during and after the test
- Meet criteria B : Operate as intended after the test
- Meet criteria C : Loss/Error of function
- Additional Information
 - EUT stopped operation and could / could not be reset by operator at _____ kV of Line _____.
- No false alarms or other malfunctions were observed during or after the test.

Product	Network Camera		
Test Item	Surge		
Test Mode	Mode 2: AC 24V Mode		
Date of Test	2011/02/18	Test Site	No.3 Shielded Room

Inject Line	Polarity	Angle	Voltage kV	Time Interval (Second)	Inject Method	Required Criteria	Complied to Criteria	Result
L-N	±	0	1kV	60	Direct	B	A	PASS
L-N	±	90	1kV	60	Direct	B	A	PASS
L-N	±	180	1kV	60	Direct	B	A	PASS
L-N	±	270	1kV	60	Direct	B	A	PASS

Note:


The testing performed is from lowest level up to the highest level as required by standard, but only highest level is shown on the report.

- Meet criteria A : Operate as intended during and after the test
- Meet criteria B : Operate as intended after the test
- Meet criteria C : Loss/Error of function
- Additional Information
 - EUT stopped operation and could / could not be reset by operator at _____ kV of Line _____.
- No false alarms or other malfunctions were observed during or after the test.

11.7. Test Photograph

Test Mode : Mode 1: Adapter Mode

Description : SURGE Test Setup

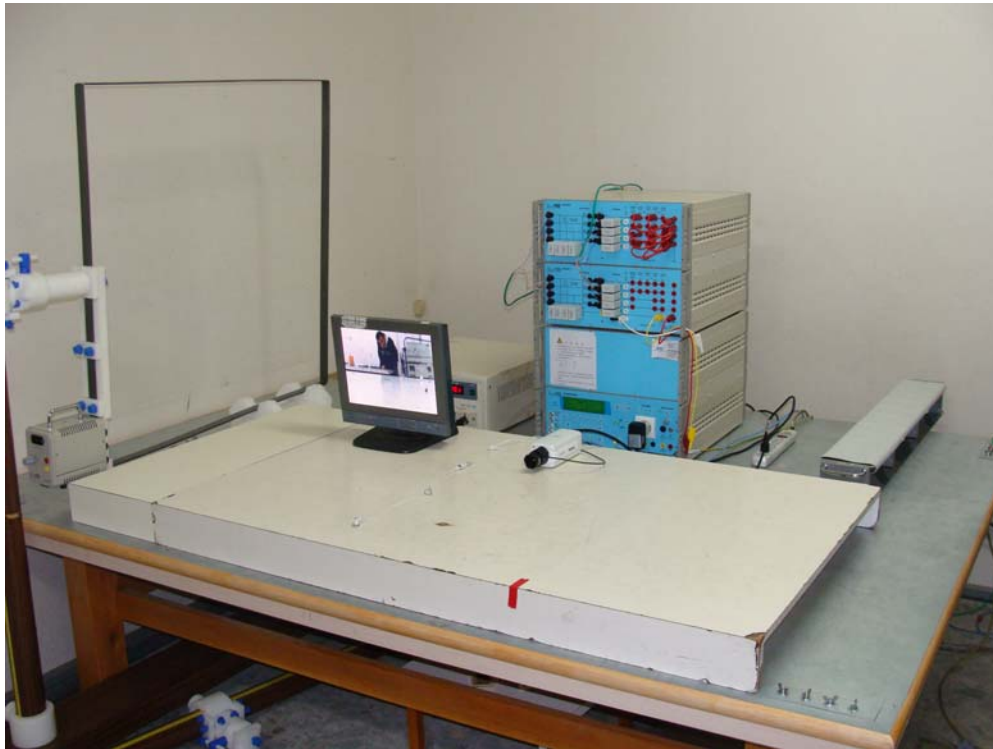

Test Mode : Mode 2: AC 24V Mode

Description : SURGE Test Setup




12. Conducted Susceptibility

12.1. Test Specification


According to Standard : IEC 61000-4-6

12.2. Test Setup

CDN Test Mode

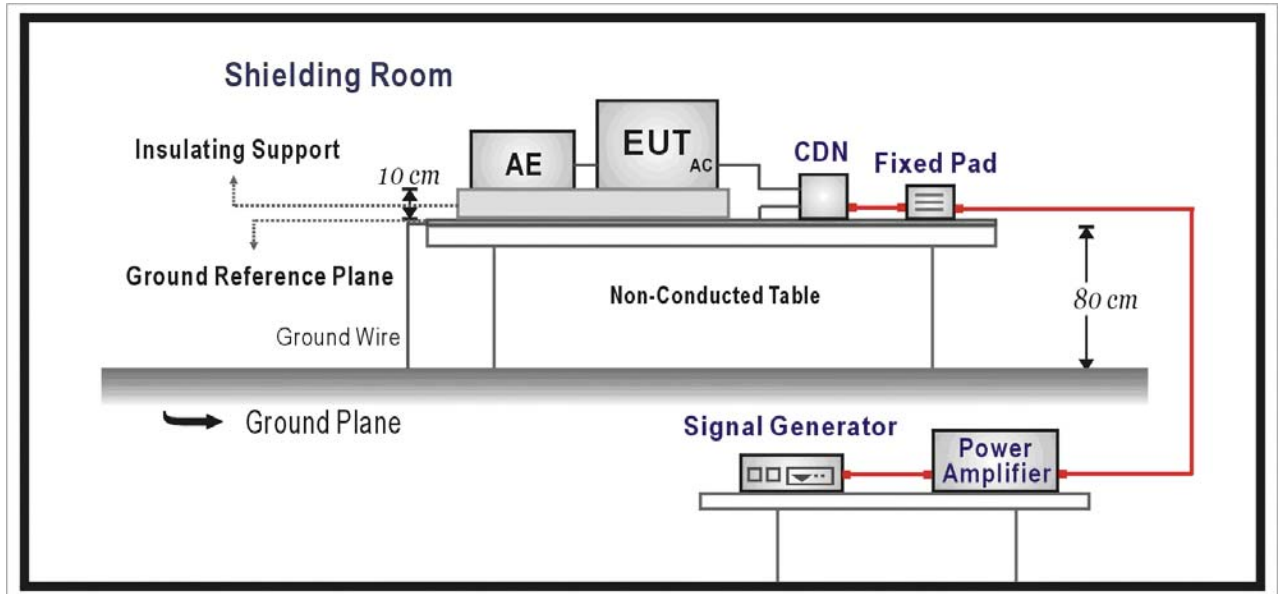

EM Clamp Test Mode

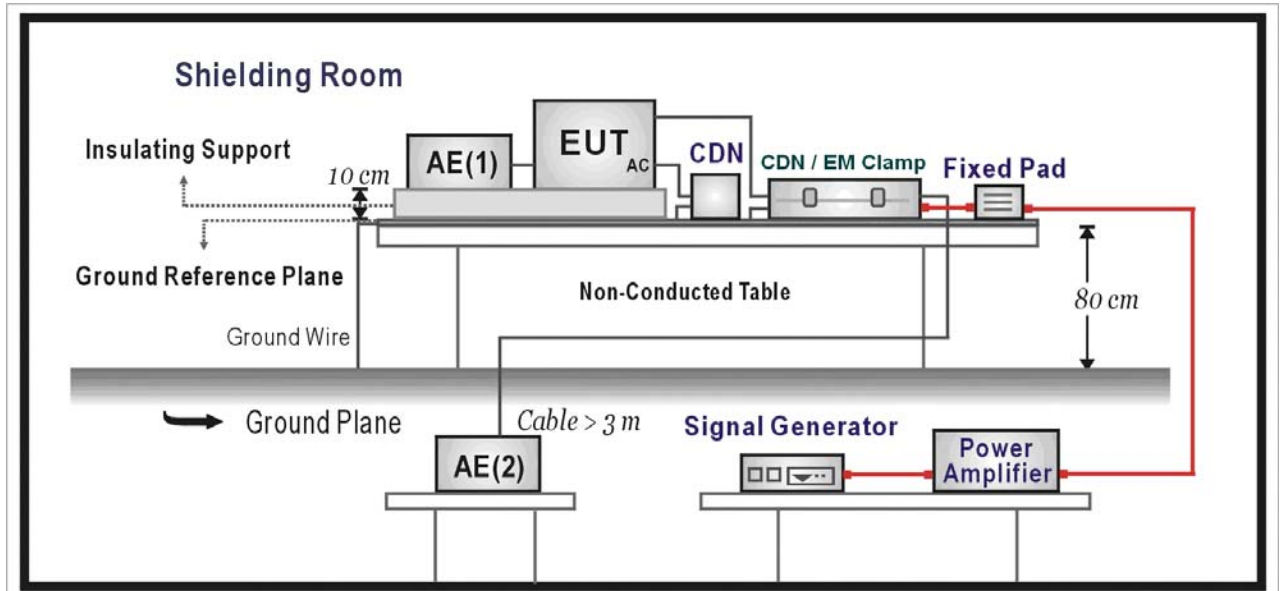

12.3. Limit

Item	Environmental Phenomena	Units	Test Specification	Performance Criteria
Signal Ports and Telecommunication Ports				
	Radio-Frequency Continuous Conducted	MHz V (rms, Un-modulated) % AM (1kHz)	0.15-80 3 80	A
Input DC Power Ports				
	Radio-Frequency Continuous Conducted	MHz V (rms, Un-modulated) % AM (1kHz)	0.15-80 3 80	A
Input AC Power Ports				
	Radio-Frequency Continuous Conducted	MHz V (rms, Un-modulated) % AM (1kHz)	0.15-80 3 80	A

12.4. Test Procedure

The EUT are placed on a table that is 0.8 meter height, and a Ground reference plane on the table, EUT are placed upon table and use a 10cm insulation between the EUT and Ground reference plane.

For Signal Ports and Telecommunication Ports

The disturbance signal is through a coupling and decoupling networks (CDN) or EM-clamp device couples to the signal and Telecommunication lines of the EUT.

For Input DC and AC Power Ports

The EUT is connected to the power mains through a coupling and decoupling networks for power supply lines. And directly couples the disturbances signal into EUT.

Used CDN-M2 for two wires or CDN-M3 for three wires.

All the scanning conditions are as follows:

Condition of Test	Remarks
1. Field Strength	130dBuV(3V) Level 2
2. Radiated Signal	AM 80% Modulated with 1kHz
3. Scanning Frequency	0.15MHz – 80MHz
4. Dwell Time	3 Seconds
5. Frequency step size Δf :	1%
6. The rate of Swept of Frequency	1.5×10^{-3} decades/s

12.5. Deviation from Test Standard

No deviation.

12.6. Test Result

Product	Network Camera		
Test Item	Conducted susceptibility		
Test Mode	Mode 1: Adapter Mode		
Date of Test	2011/02/18	Test Site	No.6 Shielded Room

Frequency Range (MHz)	Voltage Applied dBuV(V)	Inject Method	Tested Port of EUT	Required Criteria	Performance Criteria Complied To	Result
0.15~80	130 (3V)	CDN	AC IN	A	A	PASS
0.15~80	130 (3V)	CDN	LAN	A	A	PASS
0.15~80	130 (3V)	Clamp	Coaxial	A	A	PASS

Note:

The testing performed is from lowest level up to the highest level as required by standard, but only highest level is shown on the report.

- Meet criteria A : Operate as intended during and after the test
- Meet criteria B : Operate as intended after the test
- Meet criteria C : Loss/Error of function
- Additional Information
 - EUT stopped operation and could / could not be reset by operator at _____ dBuV(V) at frequency _____MHz.
 - No false alarms or other malfunctions were observed during or after the test. The acceptance criteria were met, and the EUT passed the test.

Product	Network Camera		
Test Item	Conducted susceptibility		
Test Mode	Mode 2: AC 24V Mode		
Date of Test	2011/02/18	Test Site	No.6 Shielded Room

Frequency Range (MHz)	Voltage Applied dBuV(V)	Inject Method	Tested Port of EUT	Required Criteria	Performance Criteria Complied To	Result
0.15~80	130 (3V)	CDN	AC IN	A	A	PASS
0.15~80	130 (3V)	CDN	LAN	A	A	PASS
0.15~80	130 (3V)	Clamp	Coaxial	A	A	PASS

Note:

The testing performed is from lowest level up to the highest level as required by standard, but only highest level is shown on the report.

- Meet criteria A : Operate as intended during and after the test
- Meet criteria B : Operate as intended after the test
- Meet criteria C : Loss/Error of function
- Additional Information
 - EUT stopped operation and could / could not be reset by operator at _____ dBuV(V) at frequency _____MHz.
 - No false alarms or other malfunctions were observed during or after the test. The acceptance criteria were met, and the EUT passed the test.

Product	Network Camera		
Test Item	Conducted susceptibility		
Test Mode	Mode 3: POE Mode		
Date of Test	2011/02/18	Test Site	No.6 Shielded Room

Frequency Range (MHz)	Voltage Applied dBuV(V)	Inject Method	Tested Port of EUT	Required Criteria	Performance Criteria Complied To	Result
0.15~80	130 (3V)	Clamp	LAN	A	A	PASS
0.15~80	130 (3V)	Clamp	Coaxial	A	A	PASS

Note:

The testing performed is from lowest level up to the highest level as required by standard, but only highest level is shown on the report.

- Meet criteria A : Operate as intended during and after the test
- Meet criteria B : Operate as intended after the test
- Meet criteria C : Loss/Error of function
- Additional Information
 - EUT stopped operation and could / could not be reset by operator at _____ dBuV(V) at frequency _____MHz.
 - No false alarms or other malfunctions were observed during or after the test. The acceptance criteria were met, and the EUT passed the test.

12.7. Test Photograph

Test Mode : Mode 1: Adapter Mode

Description : Conducted Susceptibility Test Setup



Test Mode : Mode 1: Adapter Mode

Description : Conducted Susceptibility Test Setup - CDN



Test Mode : Mode 2: AC 24V Mode

Description : Conducted Susceptibility Test Setup



Test Mode : Mode 2: AC 24V Mode

Description : Conducted Susceptibility Test Setup - CDN



Test Mode : Mode 3: POE Mode

Description : Conducted Susceptibility Test Setup - Clamp




13. Power Frequency Magnetic Field

13.1. Test Specification

According to Standard : IEC 61000-4-8

13.2. Test Setup

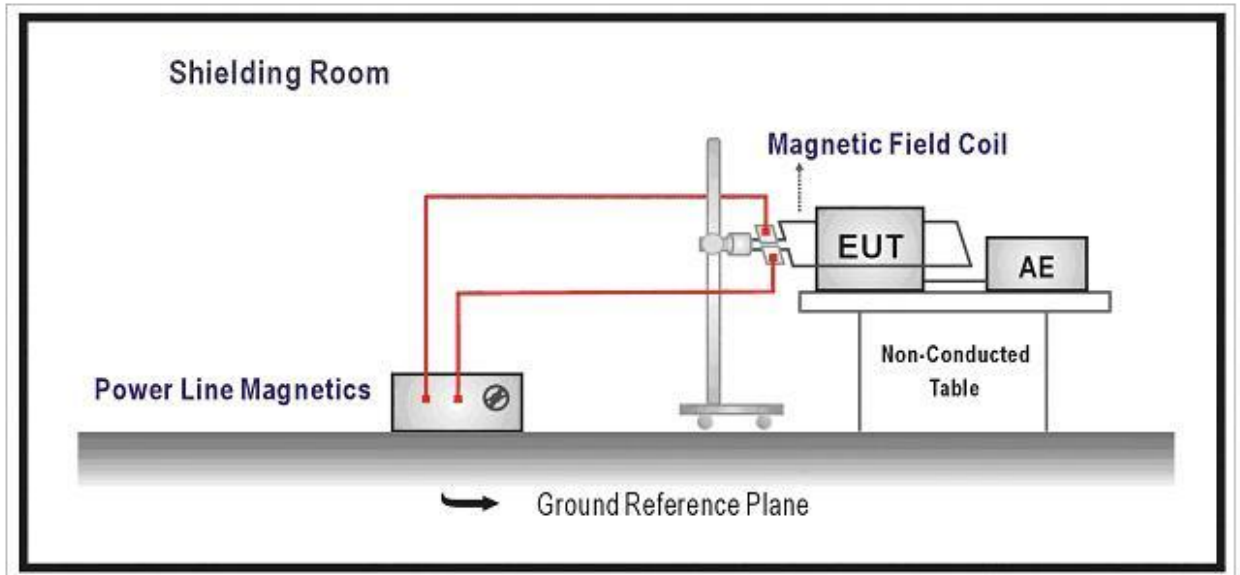

13.3. Limit

Item	Environmental Phenomena	Units	Test Specification	Performance Criteria
Enclosure Port				
	Power-Frequency Magnetic Field	Hz A/m (r.m.s.)	50 1	A

13.4. Test Procedure

The EUT and its load are placed on a table which is 0.8 meter above a metal ground plane measured at least 1m*1m min. The test magnetic field shall be placed at central of the induction coil.

The test magnetic Field shall be applied 10 minutes by the immersion method to the EUT. And the induction coil shall be rotated by 90° in order to expose the EUT to the test field with different orientation (X, Y, Z Orientations).

13.5. Deviation from Test Standard

No deviation.

13.6. Test Result

Product	Network Camera		
Test Item	Power frequency magnetic field		
Test Mode	Mode 1: Adapter Mode		
Date of Test	2011/02/18	Test Site	No.3 Shielded Room

Polarization	Frequency (Hz)	Magnetic Strength (A/m)	Required Performance Criteria	Performance Criteria Complied To	Test Result
X Orientation	50	1	A	A	PASS
Y Orientation	50	1	A	A	PASS
Z Orientation	50	1	A	A	PASS

- Meet criteria A: Operate as intended during and after the test
- Meet criteria B: Operate as intended after the test
- Meet criteria C: Loss/Error of function
- Additional Information
 - EUT stopped operation and could / could not be reset by operator at _____ kV of Line _____.
- No false alarms or other malfunctions were observed during or after the test. The acceptance criteria were met, and the EUT passed the test.

Product	Network Camera		
Test Item	Power frequency magnetic field		
Test Mode	Mode 2: AC 24V Mode		
Date of Test	2011/02/18	Test Site	No.3 Shielded Room

Polarization	Frequency (Hz)	Magnetic Strength (A/m)	Required Performance Criteria	Performance Criteria Complied To	Test Result
X Orientation	50	1	A	A	PASS
Y Orientation	50	1	A	A	PASS
Z Orientation	50	1	A	A	PASS

- Meet criteria A: Operate as intended during and after the test
- Meet criteria B: Operate as intended after the test
- Meet criteria C: Loss/Error of function
- Additional Information
 - EUT stopped operation and could / could not be reset by operator at _____ kV of Line _____.
- No false alarms or other malfunctions were observed during or after the test. The acceptance criteria were met, and the EUT passed the test.

Product	Network Camera		
Test Item	Power frequency magnetic field		
Test Mode	Mode 3: POE Mode		
Date of Test	2011/02/18	Test Site	No.3 Shielded Room

Polarization	Frequency (Hz)	Magnetic Strength (A/m)	Required Performance Criteria	Performance Criteria Complied To	Test Result
X Orientation	50	1	A	A	PASS
Y Orientation	50	1	A	A	PASS
Z Orientation	50	1	A	A	PASS

- Meet criteria A: Operate as intended during and after the test
- Meet criteria B: Operate as intended after the test
- Meet criteria C: Loss/Error of function
- Additional Information
 - EUT stopped operation and could / could not be reset by operator at _____ kV of Line _____.
- No false alarms or other malfunctions were observed during or after the test. The acceptance criteria were met, and the EUT passed the test.

13.7. Test Photograph

Test Mode : Mode 1: Adapter Mode

Description : Power Frequency Magnetic Field Test Setup



Test Mode : Mode 2: AC 24V Mode

Description : Power Frequency Magnetic Field Test Setup



Test Mode : Mode 3: POE Mode

Description : Power Frequency Magnetic Field Test Setup




14. Voltage Dips and Interruption

14.1. Test Specification

According to Standard : IEC 61000-4-11

14.2. Test Setup

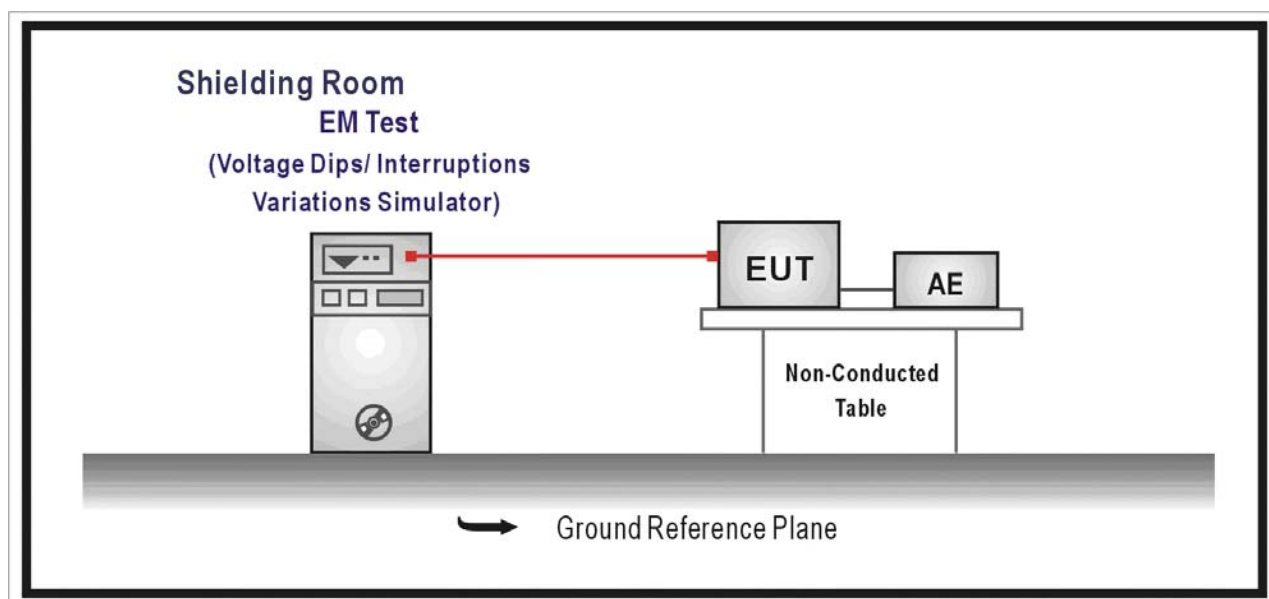

14.3. Limit

Item	Environmental Phenomena	Units	Test Specification	Performance Criteria
Input AC Power Ports				
Voltage Dips	% Reduction	30	C	
	Period	25		
Voltage Interruptions	% Reduction	>95	B	
	Period	0.5		
Voltage Interruptions	% Reduction	> 95	C	
	Period	250		

14.4. Test Procedure

The EUT and its load are placed on a table which is 0.8 meter above a metal ground plane measured 1m*1m min. And 0.65mm thick min. And projected beyond the EUT by at least 0.1m on all sides. The power cord shall be used the shortest power cord as specified by the manufacturer.

For Voltage Dips/ Interruptions test:

The selection of test voltage is based on the rated power range. If the operation range is large than 20% of lower power range, both end of specified voltage shall be tested.

Otherwise, the typical voltage specification is selected as test voltage.

The EUT is connected to the power mains through a coupling device that directly couples to the Voltage Dips and Interruption Generator.

The EUT shall be tested for 30% voltage dip of supplied voltage and duration 25 Periods, for 95% voltage dip of supplied voltage and duration 0.5 Periods with a sequence of three voltage dips with intervals of 10 seconds, and for 95% voltage interruption of supplied voltage and duration 250 Periods with a sequence of three voltage interruptions with intervals of 10 seconds.

Voltage phase shifting are shall occur at 0° , 45° , 90° , 135° , 180° , 225° , 270° , 315° of the voltage.

14.5. Deviation from Test Standard

No deviation.

14.6. Test Result

Product	Network Camera		
Test Item	Voltage dips and interruption		
Test Mode	Mode 1: Adapter Mode		
Date of Test	2011/02/18	Test Site	No.3 Shielded Room

Voltage Dips and Interruption Reduction(%)	Angle	Test Duration (Periods)	Required Performance Criteria	Performance Criteria Complied To	Test Result
30	0	25	C	A	PASS
30	45	25	C	A	PASS
30	90	25	C	A	PASS
30	135	25	C	A	PASS
30	180	25	C	A	PASS
30	225	25	C	A	PASS
30	270	25	C	A	PASS
30	315	25	C	A	PASS
>95	0	0.5	B	A	PASS
>95	45	0.5	B	A	PASS
>95	90	0.5	B	A	PASS
>95	135	0.5	B	A	PASS
>95	180	0.5	B	A	PASS
>95	225	0.5	B	A	PASS
>95	270	0.5	B	A	PASS
>95	315	0.5	B	A	PASS
>95	0	250	C	B	PASS
>95	45	250	C	B	PASS
>95	90	250	C	B	PASS
>95	135	250	C	B	PASS
>95	180	250	C	B	PASS
>95	225	250	C	B	PASS
>95	270	250	C	B	PASS
>95	315	250	C	B	PASS

- Meet criteria A: Operate as intended during and after the test
- Meet criteria B: Operate as intended after the test
- Meet criteria C: Loss/Error of function
- Additional Information
 - The nominal voltage of EUT is 230V.
 - EUT stopped operation and could / could not be reset by operator at _____ kV of Line _____.
- No false alarms or other malfunctions were observed during or after the test. The acceptance criteria were met, and the EUT passed the test.

14.7. Test Photograph

Test Mode : Mode 1: Adapter Mode

Description : Voltage Dips Test Setup



15. Attachment

➤ EUT Photograph

(1) EUT Photo



(2) EUT Photo



(3) EUT Photo



(4) EUT Photo



(5) EUT Photo



(6) EUT Photo



(7) EUT Photo

